

# LOG OF BORING MW50b


(Page 1 of 1)

Client: [REDACTED]  
 Site Address: 146 Industrial Road  
 Whitehorse, Yukon  
 Project No.: [REDACTED]

Installation Date : October 3, 2005  
 Contractor : [REDACTED]  
 Drill Type : Hollow Stem  
 Logged By : [REDACTED]  
 Well Installed : Yes

Well Type : Stickup  
 : PVC (2" diameter)

DEPTH (m)	USCS	GRAPHIC	List of Acronyms		SAMPLES	SAMPLE NAME	REMARKS
			TOC: Top of Well Casing	DTW: Depth to Water from TOC			
			DESCRIPTION				
0			SAND, Light brown to brown, fine to medium grained, trace gravel, loose, dry to moist				
0.5							
1							
1.5	CG		HC odour				
2							
2.5			colour changes to grey, strong HC odour present				
3			SAND, grey, coarse grained, moist, strong H/C odour, wet				
3.5							
4							
4.5							
5							
5.5							
6							
6.5	SP		changes to a fine SAND, grey, moist, no H/C odour				
7							
7.5							
8							
8.5							
9							
9.5							
10							
10.5			EOH @ 10.5m				
11							

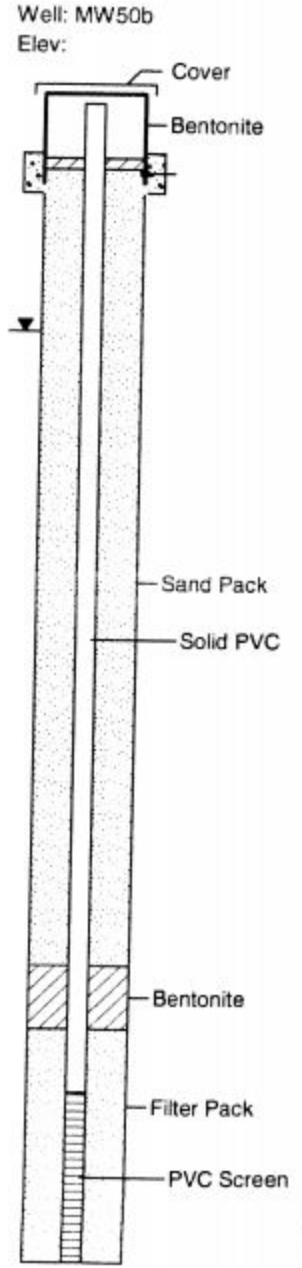

03-24-2006 X0-999/85-1 Russel Metals 05 WPTN North 60/Borehole Log: MW50b-new bor

For this demonstration version, the number of contacts, samples, and general parameter data points are limited to 5, 5, and 10. The full version does not limit the data this way.