


LOG OF BORING MW51

(Page 1 of 1)

Client: [REDACTED]
 Site Address: 146 Industrial Road
 Whitehorse, Yukon
 Project No.: [REDACTED]

Installation Date : October 4, 2005
 Contractor : [REDACTED]
 Drill Type : Hollow Stem
 Logged By : [REDACTED]
 Well Installed : Yes
 Well Type : Stickup
 : PVC (2" diameter)

DEPTH (m)	USCS	GRAPHIC	List of Acronyms TOC: Top of Well Casing DTW: Depth to Water from TOC	SAMPLES	SAMPLE NAME	REMARKS
			DESCRIPTION			
0			SAND & GRAVEL, Light brown, fine to medium grained, pebbles, loose, dry			
0.5						
1						
1.5						
2	CG					
2.5						
3			colour changes to grey, strong HC odour present			
3.5						
4						Product on end of auger bit
4.2			EOH @ 4.2m			
4.5						
5						
5.5						
6						
6.5						
7						
7.5						
8						
8.5						

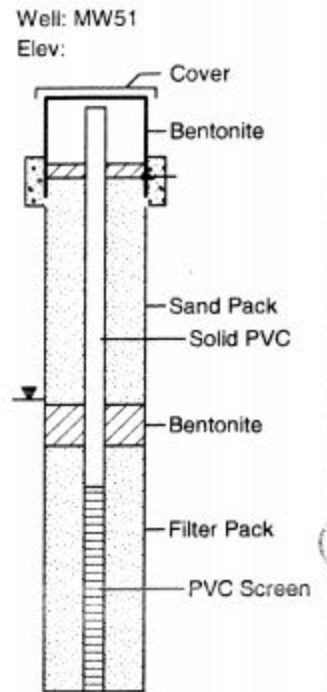

03-24-2006 T:\0800-999\854-Russel Metals\05-WPT\North 60\Borehole Logs\MW51 bor

For this demonstration version, the number of contacts, samples, and general parameter data points are limited to 5, 5, and 10. The full version does not limit the data this way.