

# LOG OF BORING MW53a

(Page 1 of 1)

Client: [REDACTED]  
 Site Address: 146 Industrial Road  
 Whitehorse, Yukon  
 Project No.: [REDACTED]

Installation Date : October 4, 2005  
 Contractor : [REDACTED]  
 Drill Type : Hollow Stem  
 Logged By : [REDACTED]  
 Well Installed : Yes

Well Type : Stickup  
 : PVC (2" diameter)


List of Acronyms

TOC: Top of Well Casing  
 DTW: Depth to Water  
 from TOC

DEPTH (m)	USCS	GRAPHIC	DESCRIPTION	SAMPLES	SAMPLE NAME	REMARKS

0			SAND & GRAVEL, Brown, medium to coarse grained, cobbles, dry			
0.5						
1						
1.5						
2	AR					
2.5			colour changes to grey, moist, strong HC odour present			
3						
3.5						
4						Well decommissioned MW53a was redrilled, poor install
4.2			EOH @ 4.2m			

Well: MW53a-abandoned  
 Elev:

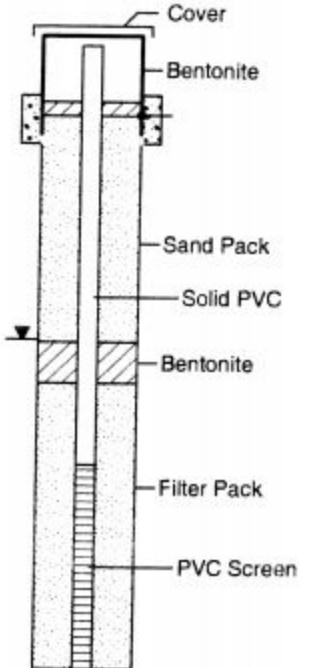

03-24-2006 . . . 000-999-854 Russel Metals 05-WPT North 60/Borehole Logs/MW53a-abandon bor

For this demonstration version, the number of contacts, samples, and general parameter data points are limited to 5, 5, and 10. The full version does not limit the data this way.