

LOG OF BORING MW53b


(Page 1 of 1)

Client: [REDACTED]
 Site Address: 146 Industrial Road
 Whitehorse, Yukon
 Project No.: [REDACTED]

Installation Date : October 5, 2005
 Contractor : [REDACTED]
 Drill Type : Hollow Stem
 Logged By : [REDACTED]
 Well Installed : Yes

Well Type : Stickup
 : PVC (2" diameter)

DEPTH (m)	USCS	GRAPHIC	List of Acronyms TOC: Top of Well Casing DTW: Depth to Water from TOC	SAMPLES	SAMPLE NAME	REMARKS
			DESCRIPTION			
0			SAND, Brown, fine to medium grained, trace gravel, loose, dry to moist			
1						
2			HC odour			
3	SP		colour changes to dark grey, strong HC odour present			
4						
5			SAND, dark grey, coarse grained, saturated, strong HC odour, visible sheen			
6						
7						
8						
9	SP					
10						
11						
12			Changes to a grey SILT @ 12m, hard EOH @ 12.0m			
13						

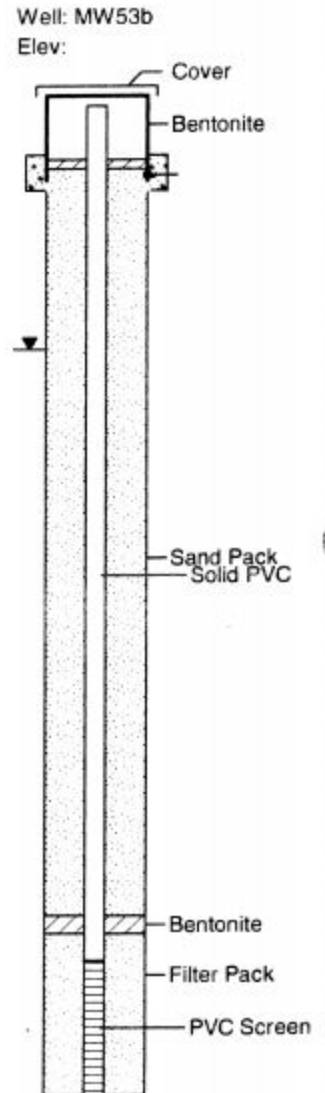

03-24-2006, T:\0600-999\854 Russel Metals\05-WP\North 60\Borehole Logs\MW53b bor

For this demonstration version, the number of contacts, samples, and general parameter data points are limited to 5, 5, and 10. The full version does not limit the data this way.