

LOG OF BORING MW54

(Page 1 of 1)

Client: [REDACTED]
 Site Address: 146 Industrial Road
 Whitehorse, Yukon
 Project No.: [REDACTED]

Installation Date : October 6, 2005
 Contractor : [REDACTED]
 Drill Type : Hollow Stem
 Logged By : [REDACTED]
 Well Installed : Yes


Well Type : Stickup
 : PVC (2" diameter)

List of Acronyms

TOC: Top of Well Casing
 DTW: Depth to Water
 from TOC

DEPTH (m)	USCS	GRAPHIC	DESCRIPTION	SAMPLES	SAMPLE NAME	REMARKS
0			SAND, Brown, medium to coarse grained, trace gravel, loose, dry to moist			
1						
2						
3	SP		colour changes to dark grey, pebbles strong HC odour present			
4			wet			
5						
6			SAND, dark grey, coarse grained, loose, H/C odour			
7	SP					
8						

EOH @ 7.5m

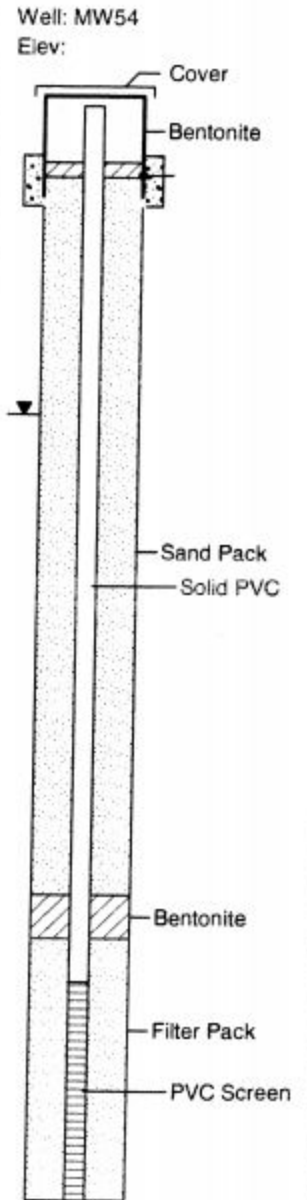

03-24-2006 .\00-369454 Russel Metals\05-WPT\North 60\Borehole Logs\MW54.log

For this demonstration version, the number of contacts, samples, and general parameter data points are limited to 5, 5, and 10. The full version does not limit the data this way.