

LOG OF BORING MW58

(Page 1 of 1)


146 Industrial Road
Whitehorse, Yukon

Installation Date : September 30, 2007
 Contractor : [REDACTED]
 Drill Type : Solid Stem Auger
 Logged By : [REDACTED]
 Well Installed : Yes

Elevation (Surface) :
 Elevation (TOC) :
 Elevation (Water) :
 DTW (from TOC) :
 Well Type : PVC (2" diameter)

Depth in Meters	USCS	GRAPHIC	DESCRIPTION	SAMPLES	SAMPLE NAME	Blow Count	REMARKS
0	GP		Angular and round GRAVEL and COARSE SAND. Dry and loose.	☒	MW58-1	25 ppm	
0.5	GP		Brown medium to fine SAND with some angular gravel. Dry and loose.				
1			Brown medium to coarse SAND and GRAVEL. Dry and loose.				
2	GP		Moist @ 2.25 meters.	☒	MW58-2	50 ppm	
2.5				☒	MW58-3	350 ppm	
3			Grey coarse SAND and GRAVEL. Wet and loose. Hydrocarbon odour and sheen.	☒	MW58-4	7% LEL	
4							
5				☒	MW58-5	4% LEL	
6	GP		Grey SILT. Moist and Compact	☒	MW58-6/GR10	225 ppm	
6.5				☒	MW58-7	375 ppm	
7				☒	MW58-8	3% LEL	
8	ML		Grey SILT. Moist and Compact	☒	MW58-9	6% LEL	
8.55			End of hole @ 8.55 meters.				

Well: MW58

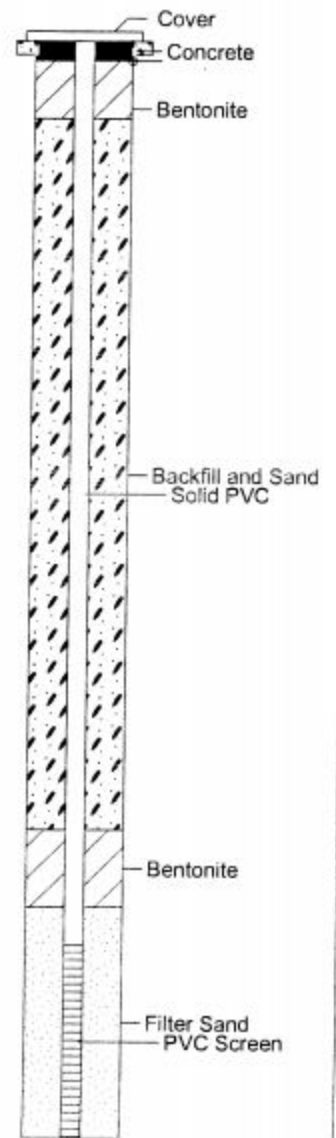

10-23-2007 T:\0800-997\654 Russel Metals\06 02\Borehole logs\MW58 bor