



February 22, 2013

HYDROGEOLOGICAL ASSESSMENT

Pelly Crossing Solid Waste Disposal Facility

Submitted to:

Ms. Laura Prentice
Senior Program Manager
Land Development Unit
Community Services, Infrastructure Development Branch
PO Box 2703, Main Administration Building
Whitehorse, YT Y1A 2C6

REPORT



Report Number: 1114360073-513-R-Rev0-2400

Distribution:

2 Copies - Yukon Government Community Services
2 Copies - Golder Associates Ltd.





Executive Summary

Golder Associates Ltd. (“Golder”) was retained by the Government of Yukon Community Services, Infrastructure Branch on September 28, 2011 to complete a groundwater monitoring well network installation and hydrogeological assessment program at up to 20 solid waste facilities located across the Territory. The Pelly Crossing Solid Waste Disposal Facility (the “Facility” or “Site”) is one of the sites included in the program. A multiphase approach was implemented at each Facility in order to carry out the hydrogeological assessment. The first phase completed for the program was a review of Site-specific requirements and considerations. The second phase was the preparation of a work plan and schedule. The third phase was the development and presentation of a Background Research and Facility Site Assessment Plan. The fourth phase consisted of the drill program tender specification and tender process management. The fifth phase consisted of the installation of a monitoring well network and collection of data on water levels, water quality, and aquifer parameters. The sixth and final phase resulted in a draft of this Hydrogeological Assessment Report, documenting the results of the investigation.

In summary, the information obtained during the Hydrogeological Assessment indicated the following:

- **Site Description:** The Pelly Crossing Solid Waste Disposal Facility is located in the central portion of Yukon, within the Yukon Plateau (central) Ecological Region, and in the Selkirk First Nation’s traditional territory, at latitude 63° 47’ north, and longitude 136° 36’ west. The Site is accessed by a gravel road off the east side of the Klondike Highway at kilometre 464, 282 km north of Whitehorse. The Facility serves as a domestic solid waste disposal facility for the community of Pelly Crossing and the nearby Selkirk First Nation residents. The facility accepts household waste, construction and demolition debris, and hazardous wastes such as waste oil and tires. Household waste and demolition debris are burned on-Site and buried. Tires, scrap metals, and oils are stored in segregated area on-Site and transported off-Site for disposal when volumes warrant. No evidence spill or discharges were observed during the Site reconnaissance.
- **Site Topography:** The Facility is at an elevation of approximately 565 m (1,850 feet) above sea level and lies within the Mica Creek and Pelly River watersheds. A cleared area of approximately 14,400 square meters, which slopes to the south, is present at the Facility. Local surficial geology is mapped as eolian deposits, consisting of well sorted massive sand, forming crescent shaped and linear dunes, and featureless or gently undulating inter-dune eolian plains.
- **Stratigraphy and Hydrogeology:**
 - The regional hydraulic gradient near the Site is expected to follow the regional topography, which slopes south towards Mica Creek;
 - Subsurface conditions were investigated with the installation of three monitoring wells, including PC-MW12-01, PC-MW12-02, and PC-MW12-03, which were completed from July 16 to July 17, 2012, under the supervision of Golder Associates for the establishment of a monitoring well network at the Site;
 - The Site stratigraphy, to the maximum depth drilled (15.5 m), consists of layered sediments composed of silt and sand, with minor clay and gravel;



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

- A confined water bearing zone was encountered during the drilling and installation of three monitoring wells at a depth of between 5.5 m and 14.6 m below grade;
 - A series of hydraulic response tests were performed on all three monitoring wells. The results of these tests indicate the hydraulic conductivity of the surficial water-bearing unit underlying the Site ranges from 4×10^{-6} to 1×10^{-5} m/s. These values are considered reasonable for the units encountered at their respective depths during drilling;
 - The horizontal hydraulic gradient at the Site was determined, using monitoring well water level data, to be approximately 0.009 m/m, sloping to the southeast;
 - Average linear groundwater seepage velocity in the surficial aquifer is estimated to range between approximately between 7×10^{-8} m/s and 3×10^{-7} m/s (approximately 0.006 to 0.09 metres per day); and
 - Based on the groundwater flow direction determined from the initial groundwater monitoring event, PC-MW12-01 is up-gradient of the Site, PC-MW12-03 is located directly downgradient of the waste disposal areas, and PC-MW12-02 is located cross-gradient of the waste disposal areas. This conclusion should be re-evaluated in the spring, and if the requirement of a minimum two downgradient wells has not been met, an additional downgradient well is likely required.
- Groundwater Chemistry:
- The results of a desktop study and several Site visits indicate that the Yukon Contaminated Sites Regulation (CSR) criteria for freshwater aquatic life are applicable to the Site;
 - Groundwater samples were collected from monitoring wells PC-MW12-01, PC-MW12-02, and PC-MW12-03, and a surface water sample was collected from a small pond located approximately 340 m northeast of the Facility, during one sampling event on which occurred from September 9 through September 13, 2012; and
 - Results of groundwater sampling at the Site indicated high TDS and background concentration of analytes that may typically be associated with landfill leachate contamination. The sample results indicated acceptable levels of relevant chemical parameters as defined by the CSR criteria for freshwater aquatic life, with the exception of sulphate, which exceeded the standard of 1000 mg/L in all of the samples. This suggests that landfill leachate influence on shallow groundwater underlying the Site is not evident.

The following recommendations are made, based on the results of the 2012 hydrogeological assessment presented in this report:

- As required by the Facility's Waste Management Permit, future groundwater monitoring should be conducted twice a year (spring and late summer);
- Due to the absence of contaminants identified in the initial groundwater quality assessment, and the distance of the Site to the nearest populated area, this Facility should be considered to be low concern;



PELLE CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

- Monitoring well location, elevation for ground surface, and the elevation of the top of the PVC standpipe (measuring point) should be surveyed for each well by a professional land surveyor, prior to the next monitoring event, to tie wellheads into the regional linkage;
- Groundwater quality at the Facility should be reevaluated following an additional round of groundwater monitoring to determine if there are any potential impacts present from landfill leachate; and
- Since the groundwater flow direction may change seasonally, flow direction should be re-evaluated next spring to affirm whether or not the conditions for one upgradient and two downgradient monitoring wells have been met.



Study Limitations

This report was prepared for the Government of Yukon Community Services, Infrastructure Development Branch.

The inferences concerning the Pelly Crossing Solid Waste Disposal Facility contained in this report are based on information obtained during the assessment conducted by Golder personnel, and are based solely on the condition of the property at the time of the Site reconnaissance, installation of monitoring wells, and groundwater monitoring events, supplemented by historical and interview information obtained by Golder, as described in this report.

This report was prepared, based in part, on information obtained from historic information sources. In evaluating the subject Site, Golder has relied in good faith on information provided. We accept no responsibility for deficiency or inaccuracy contained in this report as a result of our reliance on the aforementioned information.

The findings and conclusions documented in this report have been prepared for the specific application to this project, and have been developed in a manner consistent with that level of care normally exercised by environmental professionals currently practicing under similar conditions in the jurisdiction.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Golder accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

With respect to regulatory compliance issues, regulatory statutes are subject to interpretation. These interpretations may change over time, and should be reviewed.

If new information is discovered during future work, Golder should be requested to re-evaluate the conclusions of this report and to provide amendments, as required, prior to any reliance upon the information presented herein.



Table of Contents

1.0 INTRODUCTION.....	1
1.1 Background	1
1.2 Purpose and Objectives.....	1
1.3 Scope and Sequence of Work	1
1.4 Qualifications of Assessors.....	2
1.5 Authorization.....	3
2.0 SITE DESCRIPTION AND HISTORY	3
2.1 Site Location	3
2.2 Site History	3
3.0 METHODOLOGY.....	3
3.1 Preliminary Hydrogeological Assessment.....	3
3.1.1 Data Sources	4
3.1.2 Site Inspections.....	5
3.1.3 Background Geological Information Sources	5
3.1.4 Contaminated Sites Registry.....	5
3.1.5 Review of Solid Waste Disposal Facility Permit and Waste Management Plan	5
3.1.6 Review of Environment Yukon Information	6
3.2 Field Investigations	6
3.2.1 Scope of Field Investigations	6
3.2.2 Groundwater Monitoring Well Network.....	6
3.2.3 Monitoring Well Surveying	8
3.2.4 Groundwater Monitoring Event	8
3.2.5 Rising Head Hydraulic Response Tests.....	8
3.3 Laboratory Analysis	9
3.4 Quality Assurance / Quality Control	9
3.5 Application of Applicable Water Quality Standards.....	10
4.0 CONCEPTUAL HYDROGEOLOGICAL MODEL	12
4.1 Setting	12



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

4.2	Climate	12
4.3	Geology and Hydrogeology	12
4.3.1	Geological Framework	12
4.3.2	Principal Aquifer	13
4.4	Groundwater Flow Systems.....	13
4.4.1	Regional Groundwater Flow.....	13
4.4.2	Local Groundwater Flow	13
4.5	Hydraulic Response Tests.....	13
4.6	Estimated Linear Groundwater Velocity.....	14
4.7	Potential Contamination of Groundwater and Transport Mechanisms.....	14
5.0	GROUNDWATER IMPACT ASSESSMENT.....	15
5.1	Review of Groundwater Chemistry	15
5.2	Interpretation of Groundwater Chemistry.....	16
6.0	CONCLUSIONS.....	17
7.0	RECOMMENDATIONS.....	19
8.0	CLOSURE.....	19



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

TABLES

Table 1: Summary of Waste Disposal Facility Permits and Groundwater Monitoring Requirements	6
Table 2: Well Construction Details	7
Table 3: Monitoring Well Locations and Groundwater Elevations September 9 – 10, 2012	8
Table 4: Parameters Analyzed in September 2012	9
Table 5: Review of QA/QC Procedures Taken	9
Table 6: Applicable Water Quality Standards	11
Table 7: Aquifer Units Encountered at the Site	13
Table 8: Estimated Hydraulic Conductivity	13
Table 9: Important Groundwater Chemistry Results	15

FIGURES

Figure 1: Key Plan
Figure 2: Site Plan and Cross-Section Location
Figure 3: Regional Surficial Geology
Figure 4: Cross Section A-A'
Figure 5: Regional Drainage and Land Zoning
Figure 6: Monitoring Well Location Map and Groundwater Elevation
Figure 7: Schoeller Plot
Figure 8: Piper Plot
Figure 9: Stiff Diagram

APPENDICES

APPENDIX A

Site Photographs

APPENDIX B

Well Construction Logs

APPENDIX C

Well Development and Sampling Sheets

APPENDIX D

Slug Test Data

APPENDIX E

Analytical Reports and Chain of Custody Forms



1.0 INTRODUCTION

1.1 Background

Golder Associates Ltd. ("Golder") was retained by the Government of Yukon Community Services, Infrastructure Branch on September 28, 2011 to complete a groundwater monitoring well network installation and hydrogeological assessment program at up to 20 solid waste facilities located across the Territory. The Pelly Crossing Solid Waste Disposal Facility (the "Facility" or the "Site") is one of the sites included in the program. This report presents the findings of our investigation.

These works have been performed in accordance with the approved scope of work detailed in Golder's proposal (P1-1436-0073) dated August 29, 2011, accepted by Yukon Government Community Services on October 7, 2011, and additional works detailed in our letter dated April 26, 2012 and accepted April 30, 2012.

1.2 Purpose and Objectives

A phased approach is typically implemented in order to develop a Site-specific groundwater monitoring program. The following objectives are included in the development of the program:

- Develop a conceptual hydrogeological model of the Site using existing data that identifies potential contaminant source(s), pathways, and receptors;
- Visit the Site to confirm the hydrogeological model, assess Site conditions, and identify monitoring well locations;
- Design a monitoring well network and drilling program;
- Install groundwater monitoring wells in accordance with the plan;
- Sample the groundwater and, if applicable, surface water;
- Analyze the data and identify potential impacts;
- With the new data, re-evaluate the conceptual hydrogeological model and groundwater monitoring program; and
- Provide recommendations, if needed, to further assess potential impacts to groundwater quality.

1.3 Scope and Sequence of Work

The following scope of work was proposed to develop the conceptual hydrogeological model for the Site and installation of a monitoring well network. This work was performed in accordance with the Waste Management Permit (Permit No. 80-009 effective February 29, 2012 to December 31, 2014), relevant Environment Yukon Protocols, and in accordance with the Yukon Environmental and Socioeconomic Assessment Act (YESAA) Decision Document issued for the Site (Document Number 2011-0278-029-1).



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

In summary, the work completed at the Facility included the following six phases:

- Phase 1 assessed the needs for special considerations at the Site;
- Phase 2 outlined a work plan and schedule;
- Phase 3 consisted of background research;
- Phase 4 consisted of the drill program tender specification and tender process management;
- Phase 5 consisted of the installation of a monitoring well network and collection of data on water levels, water quality, and aquifer parameters; and
- Phase 6 comprised the preparation of a draft of this Hydrogeological Assessment Report, documenting the results of this investigation.

1.4 Qualifications of Assessors

Project Manager

The role of Project Manager was filled by Gary Hamilton, P.Geo., of Golder's Burnaby, BC office. Mr. Hamilton is a senior contaminant Hydrogeologist and Principal with Golder Associates. He has over 25 years of experience, has completed landfill monitoring projects locally, and is very familiar with Yukon environmental regulations. Mr. Hamilton conducted the initial Site inspections, coordinated the drilling work, and reviewed this assessment report.

Project Director

The role of Project Director was filled by Guy Patrick, P.Eng., of Golder's Victoria, BC office. Mr. Patrick is a senior Hydrogeologist and a Principal with Golder Associates. He is a Professional Engineer registered with the Association of Professional Engineers of the Yukon Territory. Mr. Patrick has over 30 years of experience in the field of environmental and hydrogeological assessments.

Field Hydrogeologist-Engineer

The role of Project Hydrogeologist was filled by Calvin Beebe of Golder's Nelson, BC office. Mr. Beebe has an M.Sc. degree in Hydrogeology from Saint Francis Xavier University (2012). He has completed numerous projects as a Hydrogeologist with Golder Associates including work on contaminated sites, and works with senior personnel on a regular basis.

Mr. Beebe was assisted by Ms. Andrea Badger, who joined Golder in May 2012. She obtained a B.Sc. in Civil Engineering with an Environmental Option, from the University of Alberta, Edmonton (2012) and a Diploma of Northern Studies, Outdoor and Environmental Studies at Yukon College, Whitehorse (2007). She has been involved with monitoring well drilling, development, testing and sampling at landfills across the Yukon since beginning work at Golder. She has also been involved with surface water monitoring at a construction site in Northern British Columbia.



1.5 Authorization

Written authorization and a signed contract to proceed with the work outlined in our proposal dated August 29, 2011 was received by Ms. Laura Prentice, Program Manager, on October 7, 2011. Golder received e-mail authorization to proceed with additional work detailed in our letter dated April 26, 2012 on April 30, 2012. The Change Order for the work was attached to the e-mail message.

2.0 SITE DESCRIPTION AND HISTORY

2.1 Site Location

The Pelly Crossing Solid Waste Disposal Facility is in the central portion of Yukon, within the Yukon Plateau (central) Ecological Region, and in the mica Creek and Pelly River watersheds. The Site is located in the Selkirk First Nation's traditional territory at latitude 63° 47' north and longitude 136° 26' west. The Site is located on a 14.06 hectare Community Services Reserve (Disposition # 115115-030). It is accessed by a gravel road off the east side of the Klondike Highway at kilometre 464, approximately 282 km north of Whitehorse, and 6.5 km south of the community of Pelly Crossing (Figure 1).

2.2 Site History

The Facility was constructed in 1987. A sewage lagoon was constructed on the property sometime between 1987 and 1993. The Yukon Government Community Services Branch manages the Facility. The Facility serves as a domestic solid waste disposal facility for the community of Pelly Crossing and the nearby Selkirk First Nation residents. The facility accepts household waste, construction and demolition debris, and hazardous wastes such as waste oil and tires. Household waste and demolition debris are burned on-Site and buried. Tires, scrap metals, and oils are stored in segregated area on-Site and transported off-Site for disposal when volumes warrant. According to the Solid Waste Operating Plan for Pelly Crossing (Government of Yukon, 2011) burning at the facility is to be phased out by an estimated date of June 2012 and domestic waste will be landfilled on the Site. No evidence spill or discharges were observed during the Site reconnaissance.

3.0 METHODOLOGY

3.1 Preliminary Hydrogeological Assessment

The preliminary hydrogeological assessment involved a desktop review and interpretation of existing information, and an inspection of the Facility. The initial inspection of the Facility was conducted on October 19, 2011, and a follow up inspection was conducted on July 16, 2012. The purpose of the preliminary hydrogeological assessment was to identify the appropriate drilling methods and equipment, and potential well locations for the installation of a monitoring well network. This portion of the work included the following three tasks:

- Compilation and review of available information;
- Assessment and interpretation of available hydrogeological data; and
- Development of a conceptual hydrogeological model.



3.1.1 Data Sources

Data used to complete the hydrogeological assessment was obtained from the following sources:

- Access Consulting Group and G. J. Bull and Associates Inc., *Solid Waste Management Plan: Pelly Crossing*, Prepared for Yukon Community Services, Community Development Branch. 2003.
- Bouwer, H. and R.C. Rice, 1976. *A slug test method for determining hydraulic conductivity of unconfined aquifers with completely or partially penetrating wells*, Water Resources Research, vol. 12, no. 3, pp. 423-428.
- Environment Canada, Meteorological Service of Canada Last Modified 2012-05-29, Website: [http://www.climate.weatheroffice.ec.gc.ca/climate_normals/Canadian Climate Normals or Averages 1971-2000](http://www.climate.weatheroffice.ec.gc.ca/climate_normals/Canadian_Climate_Normals_or_Averages_1971-2000).
- Fetter, C. W., *Applied Hydrogeology*, Third Edition, PRENTICE HALL, New Jersey. 1994.
- Government of Yukon. Environment Act Contaminated Sites Regulation. O.I.C. 2002/171, *Schedule 3 - Generic Numerical Water Standards*.
- Government of Yukon, Yukon Community Services, Community Services, Infrastructure Branch, *Solid Waste Operation Plan: Pelly Crossing*, 2011.
- Government of Yukon, Yukon Environment, *Protocol for the Contaminated Sites Regulation Under the Environment Act*. 2011.
- Government of Yukon, Yukon Geological Survey, YGS MapMaker Online Website: <http://maps.gov.yk.ca/imf.jsp?site=YGS>
- Government of Yukon, Yukon Mining and Lands Viewer Website: <http://maps.gov.yk.ca/imf.jsp?site=miningLands>
- Government of Yukon, Yukon Water, Water Data Catalogue Website: <http://yukonwater.ca/MonitoringYukonWater/WaterDataCatalogue/>
- Government of Yukon, Department of Environment, Compiled from The Yukon Water Well Registry *Summary of Yukon Water Wells*, May 11, 2006- Website: <http://www.env.gov.yk.ca/monitoringenvironment/hydrology.php>
- Natural Resources Canada, Groundwater Information Network Website: http://ngwd-bdnes.cits.nrcan.gc.ca/service/api_ngwds:gin/en/wmc/aquifermap.html
- Jackson, L.E., 1988 - 1992. *Surficial Geology, Granite Canyon, Yukon Territory*, Geological Survey of Canada, Map 1878A, scale 1:100,000.
- Site inspections of October 23, 2011 and June 26, 2012.
- Surveys and Mapping Branch, Department of Energy, Mines, and Resources. The Atlas of Canada Website: <http://atlas.nrcan.gc.ca/site/english/maps/topo/map> Map 115 K/2, scale 1:50,000.



PELLY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

3.1.2 Site Inspections

Prior to the Facility reconnaissance, Golder developed a Facility-specific health and safety plan (HASP) for implementation during the field work. The health and safety plan included a description of the potential hazards that could be encountered during the Facility reconnaissance and proposed mitigation. Site inspections were conducted on October 19, 2011 and July 16, 2012. The initial Site visit was conducted to review the layout of the Facility and confirm geological and topographic information obtained from the review of background data. Proposed monitoring well locations were also reviewed for access constraints. During the second Site visit, the monitoring wells were drilled and installed. Selected photographs of the Facility were taken during the reconnaissance and are presented in Appendix A.

3.1.3 Background Geological Information Sources

Geological information was obtained through a review of topographic and geological maps from the Department of Energy Mines and Resources Canada, and through the Canadian Geological Survey. Additional data on the subsurface of the surrounding area was obtained through the online Groundwater Information Network (GIN), provided by Natural Resources Canada (NRCAN), and the Yukon Water Well Registry. A search of the Yukon Water online Data Catalogue did not identify water testing results within the vicinity of the Facility.

3.1.4 Contaminated Sites Registry

A Site Registry search was conducted by Yukon Environment on October 17, 2012. The search identified no contaminated site files or spill reports for the Pelly Crossing Solid Waste Disposal Facility; however, it was noted that the Facility does not have any analytical results in the file to compare against Yukon CSR standards to determine if any contamination exists. It was also noted that the Facility was largely unmonitored, and that there may have been opportunity for improper disposal and potentially unreported spillage of contaminants during its operation.

3.1.5 Review of Solid Waste Disposal Facility Permit and Waste Management Plan

Waste Management Permit No. 80-009 was issued on February 29, 2012 for the Facility. It states that the Facility is to be closed in compliance with any applicable requirements in federal, territorial, and municipal legislation including the Environment Act and Solid Waste Regulations.

Monitoring requirements set out in Waste Management Permit 80-009 include:

- Monitoring water levels and collecting water samples from groundwater monitoring wells at the Facility twice a year (spring and late summer);
- Sampling of downgradient surface water bodies concurrently with the groundwater sampling;
- Analyze surface water and groundwater samples for the parameters outlined in Section 3.3;
- Analyze water samples at a laboratory that is accredited as conforming to ISO/IEC 17025 by an accrediting body that conforms to ISO/IEC 17011 standards; and
- Submitting monitoring results to Environment Yukon by January 31 each year.



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

A summary of the Facility permits and groundwater monitoring requirements for the Site are summarized in Table 1 below.

Table 1: Summary of Waste Disposal Facility Permits and Groundwater Monitoring Requirements

Site	Site Disposal Facility Permit Number	Permit Type	Solid Waste Management Plan	Required Groundwater Monitoring
Pelly Crossing Solid Waste Disposal Facility	80-009	Modified transfer station	Community Services Operations and Programs (2011)	Twice Per Year

3.1.6 Review of Environment Yukon Information

Golder reviewed documents pertaining to the Pelly Crossing Facility on the Yukon Environment and Socioeconomic Board (YESAB) online registry on October 3, 2012. Documents reviewed included: the most current waste facility permit issued for the Facility, the most current Solid Waste Operation Plan, and the Yukon Environmental and Socioeconomic Act Decision Document.

3.2 Field Investigations

3.2.1 Scope of Field Investigations

The scope of the field investigations included the following:

- Three on-Site monitoring wells were completed by Midnight Sun under the supervision of Golder Associates from July 16 to July 18, 2012;
- Monitoring wells were developed and sampled by Golder on September 9 and 10, 2012. The water level at each well was measured prior to purging and sampling, and physiochemical parameters were monitored at each well during development and sampling. Groundwater samples were sent to ALS Environmental Laboratory in Whitehorse, YT;
- Slug tests were carried out on all three newly installed monitoring wells to assess horizontal hydraulic conductivity and linear groundwater velocity at the Site; and
- Results of field and laboratory data are summarized and interpreted in this report.

3.2.2 Groundwater Monitoring Well Network

Groundwater monitoring well installation was undertaken in general accordance with Yukon Contaminated Site Regulation Protocol (Yukon Environment, 2011).

Three (3) groundwater monitoring wells were proposed for installation at the Site to characterize groundwater conditions underlying the waste disposal Facility. A Site plan showing the monitoring well locations and key Site features is provided in Figure 2. PC-MW12-01 was intended to characterize upgradient groundwater conditions, while PC-MW12-02 and PC-MW12-03 were intended to assess groundwater conditions downgradient of the landfill. Locations of the monitoring wells (Figure 2) were selected based on aerial photography, review of Site history, Site topography, suspected groundwater flow direction, and a Site inspection.



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

Specifics for each well are listed below:

- PC-MW12-01 was installed on the north edge of the Site, and advanced to a depth of 11.3 m below grade (bg);
- PC-MW12-02 was installed near the south corner of the Site, and advanced to a depth of 14.3 m bg; and
- PC-MW12-03 was installed on the east side of the Site, and advanced to a depth of 15.5 m bg.

Wells were installed using a Driltech Marlin 5 truck-mounted air rotary drill rig.

Grab samples of drill cuttings were taken at regular intervals to log the stratigraphy encountered in each borehole. Borehole logs, documenting observed stratigraphy, along with well construction details, are provided in Appendix B. A summary of the stratigraphy and well construction details is provided in Table 2.

Each monitoring well was completed with the top of the well screen installed as close as possible to the interval where the moisture content of the formation appeared to be transitioning from unsaturated to saturated conditions.

Installation details are included on the borehole logs in Appendix B. Typical completion details are:

- Monitoring wells were completed with 50 mm, flush threaded Schedule 40 PVC casing;
- A 3 m long PVC, factory-slotted well screen (10-slot) was installed in all three monitoring wells;
- PVC casing was installed above the well screen to about 0.75 m above grade;
- A silica sand filter pack was used to fill the annulus between the PVC well screen and the borehole wall. The sand pack was extended approximately 1 m above the top of the screened interval;
- A bentonite chip seal, approximately 1 m thick, was placed directly above the sand pack. The remainder of the annulus was filled with bentonite grout;
- Each well was covered with a PVC end-cap and a lockable steel protective casing was installed to protect the wellhead; and
- All wells were developed by removing a minimum of three well volumes using dedicated Waterra™ tubing and a Hydrolift™ pump or hand bailer. Development logs are provided in Appendix C.

Table 2: Well Construction Details

Well ID	Drilled Depth (m bg)	Aquifer Unit Monitored	Casing Diameter (mm)	Screened Interval (m bg)	Filter Pack Interval (m bg)
PC-MW12-01	11.3	Gravelly CLAY	50	8.2 – 11.3	7.6 – 11.3
PC-MW12-02	14.3	Silty SAND	50	11.3 – 14.3	9.8 – 14.3
PC-MW12-03	15.5	SILT	50	12.5 – 15.5	11.6 – 15.5



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

3.2.3 Monitoring Well Surveying

Golder carried out a level survey to determine the vertical elevation to the top of the PVC wellhead (measuring point) for each well on July 18, 2012. Initial absolute elevation was estimated for PC-MW12-01 using topographic data. A level survey was conducted to obtain the relative elevation of each of the wells. Relative elevation between wells, as determined from the level survey, has a precision of ± 1 cm. Table 3 presents a summary of survey data and water level measurements (recorded September 9 - 10, 2012).

Table 3: Monitoring Well Locations and Groundwater Elevations September 9 – 10, 2012.

Well ID	UTM Coordinates (Zone 8 North)	Top of PVC Casing Elevation (masl)	Standing Water Level (mbtoc)	Groundwater Elevation (~masl)
PC-MW12-01	6961202 m N 418394 m E	567.98	2.80	565.18
PC-MW12-02	6961087 m N 418406 m E	567.47	2.74	564.73
PC-MW12-03	6961150 m N 418449 m E	566.08	1.43	564.65

3.2.4 Groundwater Monitoring Event

Golder purged and sampled monitoring wells PC-MW12-01, PC-MW12-02, and OC-MW12-03 on September 9 and 10, 2012. The procedure used for sampling followed Contaminated Sites Regulation Protocol No. 7. Prior to purging each well, the water level was first measured with an electronic measuring tape. Approximately three well volumes were then purged from each well, using 5/8 in. high density polyethylene (HDPE) Waterra™ tubing, a foot valve, and a Hydrolift™ pump. During purging, physiochemical parameters (pH, temperature, EC) were collected at regular intervals using a Hanna Instruments HI 991300 meter, and purging continued until field parameters were stable before sampling. Groundwater development and sampling datasheets are presented in Appendix C. In addition to the three groundwater monitoring wells that were sampled, a surface water sample was collected from a small pond located approximately 320 m northeast of the Site.

Sample containers and appropriate preservatives were obtained from ALS's Whitehorse laboratory. Samples for dissolved metals were field filtered using 0.45-micron, in-line filters and preserved with nitric acid. Samples were kept in coolers with ice packs prior to their delivery, and were delivered within appropriate holding times. ALS is certified by the Canadian Association for Laboratory Accreditation and is accredited as conforming to ISO/IEC 17025.

3.2.5 Rising Head Hydraulic Response Tests

Hydraulic response (slug) tests were performed on September 13, 2012, to assess the hydraulic conductivity of the surficial aquifer underlying the Site. Tests were performed using a 1.5 m long, solid 38 mm diameter PVC slug and a Solinst Levelogger pressure transducer set to measure head fluctuations at one-second intervals. Manual water level measurements were also recorded throughout the tests.

A summary of the analysis of these tests is provided in Section 4.5.



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

3.3 Laboratory Analysis

Parameters included in the laboratory testing of groundwater samples are summarized in Table 4. The parameter list complies with the Facility's Waste Management Permit (Permit No. 80-009).

Sampling and analysis were undertaken in general accordance with Yukon CSR Protocols 2 and 5 (Government of Yukon, 2011).

Table 4: Parameters Analyzed in September 2012

Sample ID	General Parameters	Nutrients	Dissolved Metals	PAH, BTEX, DOC	VOCs
PC-MW12-01	√	√	√	√	√
PC-MW12-02	√	√	√	√	√
PC-MW12-03	√	√	√	√	√
Pelly Crossing Surface Water	√	√	√	√	√

3.4 Quality Assurance / Quality Control

Table 5 provides a detailed description of the Quality Assurance (QA) and Quality Control (QC) measures taken by Golder to ensure the accuracy and integrity of groundwater quality sample analysis.

Table 5: Review of QA/QC Procedures Taken

QA/QC Aspect	Evidence and Evaluation
Data Representativeness	
Sample Integrity	All samples were kept at the appropriate temperature and delivered to the laboratory within the appropriate holding times.
Background Samples	PC-MW12-01 was shown to be upgradient of the Facility and is used to provide background levels of physiochemical parameters.
Field Procedures	Monitoring wells were purged/developed and sampled using dedicated tubing. Equipment used in sampling more than one well was decontaminated using soap (Alconox™) and distilled water. Surface water samples were collected using one-time-use syringes.
Calibration of Field Equipment	Calibration of field equipment was undertaken daily, prior to sampling wells.
Data Precision and Accuracy	
Blind Duplicate	One blind duplicate was collected from Stewart Crossing monitoring well SX-MW12-02. Of the 81 analyte pairs tested, RPD values could not be calculated for 65 of the pairs, as both values in each pair were below the laboratory method detection limit (MDL). Of the remaining analyte pairs tested, only one (nitrate) exceeded the RPD ¹ acceptance criteria of ±30%. See Report: 1114360073-2700
Trip Blanks	A trip blank was not collected during the August 2012 groundwater monitoring event.



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

QA/QC Aspect	Evidence and Evaluation
Laboratory Internal QA/QC	Laboratory QA/QC is detailed in the primary laboratory report (Appendix E). Overall, the lab report showed acceptable testing frequency and acceptable results for the method blanks, laboratory duplicates and matrix spikes.
Holding Times	Samples were delivered outside the acceptable (24 hour) hold time for physical parameters, however field parameters were taken during sample collection to compensate. Sampling for VOC's took place 2-3 days outside the 14-day recommended hold time, and sampling for TDS and Nitrate took place 1 day outside the recommended hold time.
Laboratory Detection Limit	Laboratory reports indicate that detection limits were below the standards applicable to this assessment.
Completeness of test program	Wells were sampled in accordance with the Site Assessment and Work Plan criteria.
Validity of Data Set	The data quality review indicates no significant systematic errors in the data collection or analysis process for groundwater. The results of laboratory internal QA/QC and analysis of blind duplicates were acceptable, and therefore, the data set is considered valid and complete for use as the basis for groundwater assessment.

3.5 Application of Applicable Water Quality Standards

In accordance with the Government of Yukon's solid waste facility monitoring requirements, groundwater wells and a downgradient surface water receptor were sampled and tested for the following parameters:

- Major ions (Ca, Mg, Na, K, Cl, SO₄, N, NO₂, NO₃ and P)
- Bicarbonate
- Chemical oxygen demand
- Dissolved Metals
- pH
- Total Kjeldahl Nitrogen
- Mercury
- Total dissolved solids
- EPH_{w10-32} & VH_{w6-10}
- Hardness
- Ammonia
- BTEX
- Alkalinity
- Dissolved organic carbon
- PAHs
- Carbonate
- VOCs

Groundwater and surface water analytical results were compared to the Yukon CSR water quality standards or to the Canadian Environmental Quality Guidelines for constituents where no Yukon standards were available.

The four types of water uses outlined in the CSR, the relevant water quality standards, and their applicability to this assessment are presented in Table 6.



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

Table 6: Applicable Water Quality Standards

Water Use	Applicable Water Quality Standard	Applicable Plume Radius (km)	Applicability to Assessment
Aquatic Life	Schedule 3 – Contaminated Sites Regulation (O.I.C. 2002/171)	1.0	Applicable
Drinking Water	Schedule 3 – Contaminated Sites Regulation (O.I.C. 2002/171)	1.5	Not Applicable
Irrigation	Schedule 3 – Contaminated Sites Regulation (O.I.C. 2002/171)	1.5	Not Applicable
Livestock	Schedule 3 – Contaminated Sites Regulation (O.I.C. 2002/171)	1.5	Not Applicable

The following discusses the applicability of each water quality standard to the Facility.

Aquatic Life

A search of the Yukon Lands viewer website, conducted by Golder November 28, 2012, showed several small ponds and a small creek falling within a 1 km radius of the Site, as specified in the CSR, under which aquatic life standards are applied. A review of Google Earth images from 2012, conducted by Golder on the same day, also identified several visible ponds and wetlands within 1 km of the Site. It was determined therefore, that aquatic life standards were **applicable** for the Pelly Crossing Facility.

Drinking Water

A search of drinking water wells on the Groundwater Information Network website and the Yukon Water Data Catalogue (accessed September 4, 2012) showed no drinking water wells located along the predicted downgradient direction between the Site and Mica Creek, nor in any other area within a 1.5 km radius of the Site. It was therefore deemed that CSR drinking water standards were **not applicable** for the Pelly Crossing Facility.

Irrigation and Livestock

A review of the Summary of Yukon Water Wells, compiled from The Yukon Water Well Registry, reviewed by Golder on November 26, 2012, showed no irrigation wells or wells for livestock on record for the Pelly Crossing area. It should be noted that this is not a complete record of all wells in the Yukon, and it is possible that there are irrigation wells or wells for livestock in the area. A review of Google Earth Images from 2012, conducted by Golder on November 26, 2012, as well as several visits to the Facility conducted in July and September 2012 showed no agricultural land within 1.5 km of the Facility. It was therefore considered that CSR water quality standards for irrigation and livestock are **not applicable** to the Pelly Crossing Facility.



4.0 CONCEPTUAL HYDROGEOLOGICAL MODEL

4.1 Setting

The Facility is at an elevation of approximately 552 m (1,811 feet) above sea level, and lies within the Mica Creek and Pelly River watersheds. A cleared area of approximately 14,400 square meters, which slopes to the south, is present at the Facility. Local surficial geology is mapped as eolian deposits, forming crescent shaped and linear dunes, and featureless or gently undulating inter-dune eolian plains.

4.2 Climate

Climate data at the Site is likely similar to that at the Mayo Airport climate station (Climate ID 2100700), located approximately 100 kilometres northeast of the Facility at an elevation of approximately 503 m above sea level. Average monthly precipitation reported at the Mayo Airport station ranges from a low average of 9.2 mm in April to a high average of 54.4 mm in July. The average annual precipitation is approximately 312 mm, including 147 cm as snowfall. Temperature ranges from a low average of -31°C in January to a high average of 22.7°C in July (Environment Canada, 2012).

Annual precipitation is relatively low (approximately 300 mm per year). This suggests that the amount of infiltration of water through buried waste at the Site and into the subsurface soils is relatively low. With a significant portion of the precipitation occurring in the form of snow, and the relatively cold climate, little infiltration would be expected during the winter months. The greatest potential for infiltration of water through the waste is during the spring snow melt; however, a significant portion of the water from snow melt would typically occur as surface runoff during this period.

4.3 Geology and Hydrogeology

4.3.1 Geological Framework

The southern Yukon, including the Pelly Crossing area, has undergone several episodes of glaciation, the most recent being the Quaternary McConnell Glaciation. During that period, sediments such as glacial till and glaciofluvial and glaciolacustrine sediments were deposited, especially in low elevation areas such as the Pelly River Valley where the Facility is located (Figure 3).

The Pelly Crossing area is mapped as being underlain primarily by glaciofluvial deposits, alluvium, and eolian deposits of Quaternary origin. Rock outcrops, colluvial glacial debris, morainal deposits, and bedrock exposures are found in the higher elevation areas.

Surficial geology maps published by the Yukon Geological Survey indicate natural surficial materials at the Facility are gently sloping eolian deposits. In general, deposits consist of well compacted to non-compacted sediments that are primarily well sorted massive sand. This is inconsistent with the layered silt and sand, with minor clay and gravel, deposits encountered during drilling at the Site.



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

4.3.2 Principal Aquifer

As shown in Figure 4, it is inferred that groundwater at the Site occurs in a shallow, confined aquifer composed of a variety of unconsolidated silt, clay, sand, and gravel sediments. For the purpose of this report, this aquifer has been named the Surficial Aquifer (Table 7).

Table 7 Aquifer Units Encountered at the Site

Aquifer Name	Location	Aquifer Type	Comments
Surficial Aquifer	PC-MW12-01 PC-MW12-02 PC-MW12-03	Confined; unconsolidated porous media	<ul style="list-style-type: none">ShallowLow hydraulic conductivityMatrix of silt and clay

4.4 Groundwater Flow Systems

4.4.1 Regional Groundwater Flow

Topography in the area surrounding the Facility slopes from a drainage divide, located to just south of the Site (elevation approximately 590 m amsl), to the north towards the Pelly River (elevation 475 m amsl). Regional groundwater flow is inferred to be to the north following regional topography, discharge primarily to the Pelly River.

4.4.2 Local Groundwater Flow

Golder used the groundwater depth data from August 23, 2012 and well survey elevation information collected in June 2012 to calculate the groundwater elevation at each monitoring well. The water level measurements and groundwater elevations are presented in Table 3.

Local groundwater flow direction at the Site is inferred, from groundwater elevations in the newly installed monitoring well network, to be to the southeast (Figure 6), towards an unnamed creek, which flows into Mica Creek, and eventually into the Pelly River. The horizontal hydraulic gradient at the Site was estimated to be approximately 0.0075 m/m.

4.5 Hydraulic Response Tests

Golder Associates conducted slug tests on the three newly installed monitoring wells at the Facility. The slug tests were analyzed using AQTESOLV version 4.5, and the results are included in Appendix D. Table 8 provides a summary of the findings.

Table 8: Estimated Hydraulic Conductivity

Monitoring Well ID	Primary Hydrogeological Unit	Solution Used	Calculated Hydraulic Conductivity (m/s)
PC-MW12-01	Gravelly CLAY	Bouwer-Rice (1976)	4×10^{-6}
PC-MW12-02	Silty SAND	Bouwer-Rice (1976)	1×10^{-5}
PC-MW12-03	SILT	Bouwer-Rice (1976)	1×10^{-5}



4.6 Estimated Linear Groundwater Velocity

As determined from the slug tests summarized in Table 8, the hydraulic conductivity of the shallow aquifer underlying the Site is ranges between 4×10^{-6} m/s and 1×10^{-5} m/s. The horizontal hydraulic gradient across the Site was assessed, using the monitoring well network, to be approximately 0.009 m/m to the southeast. A range of reasonable linear groundwater velocities is calculated using the following equation:

$$V = (Ki)/n$$

Where:

- V: is the groundwater velocity in meters per second (m/s);
- K: is the hydraulic conductivity in m/s as determined by slug testing;
- i: is the horizontal hydraulic gradient (m/m); and
- n: is the porosity which is estimated to be between 0.35 and 0.50 (Fetter, 1994) in units encountered.

The resulting groundwater velocity is estimated to be between 7×10^{-8} m/s and 3×10^{-7} m/s and (approximately 0.006 to 0.09 metres per day). Groundwater at the Site may travel faster or slower than these estimates due to inaccuracies or seasonal variations in these parameters.

4.7 Potential Contamination of Groundwater and Transport Mechanisms

Potential sources and transport mechanisms of groundwater contamination are evaluated based on the Site history, Site inspections, hydrogeological investigation, and contaminant transport principals. Potential sources include:

- Leachate from present and former domestic waste, commercial waste, metals, wood, construction debris, and any other potential waste disposed of at the Facility. Potential contaminates leaching from these sources include: heavy metals, nutrients (NO_3 , NH_3), organic hydrocarbons (Fuels, PAH's, chlorinated hydrocarbons), and salts; and
- Leakage and spillage from on-Site hydrocarbon storage areas.

Transport mechanisms that may act on these sources of contamination and cause potential contamination of downgradient receptors include:

- Percolation of precipitation from the surface, through the unsaturated zone, and into the saturated zone.
- Transport of contaminants within the saturated zone (aquifer) to other downgradient locations.



5.0 GROUNDWATER IMPACT ASSESSMENT

5.1 Review of Groundwater Chemistry

As discussed in Section 3.2.4, one round of groundwater monitoring was conducted on the three newly installed monitoring wells at the Pelly Crossing Solid Waste Disposal Facility and one surface water sampling location downgradient from the Site on September 9 and 10, 2012. Chain of custody forms for the groundwater samples collected, the complete groundwater chemistry results, and QA/QC data can be found in Appendix E. Table 9 summarizes parameters from the groundwater chemistry results, which are used to identify potential leachate contamination.

Table 9: Important Groundwater Chemistry Results

Sample Location	Total Dissolved Solids (mg/L)	Chloride (mg/L)	Ammonia (mg/L)	Sulphate (mg/L)	DOC (mg/L)	Sodium (mg/L)
PC-MW12-01	8890	109	1.84	5840	33.8	231.0
PC-MW12-02	3970	90	1.54	2520	17.2	113
PC-MW12-03	4690	105	1.80	2900	18.1	125.0
Surface Water	3870	76	0.342	2140	68.6	103.0

Total Dissolved Solids

Total dissolved solids (TDS) is a measurement of the total amount of dissolved organic and inorganic material contained within a liquid. Elevated TDS can indicate the presence of groundwater contamination caused by, for example, landfill leachate. Typically, major ions that comprise TDS include: NO₃, NH₃, Na, K, Mg, Ca, SO₄, Cl, and HCO₃. Values of TDS in the monitoring well samples ranged from 3970 mg/L to 8890 mg/L, which is considered to be higher than the normal range for naturally occurring groundwater. The TDS concentration in the surface water sample was slightly lower (3870 mg/L). Elevated TDS concentration in all of the water samples indicate higher than normal TDS in background than is normally found in naturally occurring groundwater, likely due to the presence of evaporate (Gypsum, anhydrite, epsomite, halite, and/or decahydrate) deposits in the area. This already elevated concentration makes distinguishing between naturally occurring TDS and TDS derived from landfill leachate more difficult.

Dissolved Organic Carbon

Dissolved organic carbon (DOC) concentrations can be elevated by the presence of leachate originating from decomposed organic matter. Levels associated with landfill leachate can be in the hundreds or thousands of mg/L. DOC levels from all monitoring wells at the Pelly Crossing Site ranged from 17.2 mg/L to 33.8 mg/L. The level of DOC detected in the surface water sample was 68.6 mg/L. DOC concentrations in both groundwater and surface water samples showed no evidence of influence from landfill leachate.



Chloride

Chloride is often used as a tracer for anthropogenic influence on groundwater. Elevated chloride levels are associated with a number of sources including sewage, leachate, and road salting. In the case of landfills, elevated chloride might be expected due to degradation of waste with a high chloride concentration. Chloride levels from the monitoring well network ranged between 90 mg/L and 109 mg/L. The chloride concentration measured in the surface water sample was 76 mg/L. These levels are considered to be low and well within the range expected in naturally occurring waters. Chloride levels in all of the samples did not show evidence of influence from landfill leachate.

Ammonia

Ammonia is a typical landfill leachate indicator. Ammonia concentrations in the groundwater samples ranged between 1.54 mg/L and 1.84 mg/L and the ammonia concentration in the surface water sample was 0.342 mg/L, indicating no evidence of influence from landfill leachate.

Sulphate

Sulphate exceeded the CSR standard of 1000 mg/L in all of the samples. Elevated sulphate found in all of the water samples, along with elevated calcium, sodium, and magnesium levels suggest that naturally occurring evaporate deposits upgradient of the Site are the cause of elevated sulphate and TDS in water taken from the Site.

Metals

Metals concentrations in surface water and groundwater samples were within the range expected in naturally occurring waters. No metals concentrations exceeded any standards set by the Yukon CSR for freshwater aquatic life.

Organics

Detectable levels of organic constituents are often a sign of leachate contamination. Of the hydrocarbons analyzed (BTEX, PAH, EPH_{w10-32} & VH_{w6-10} , and chlorinated hydrocarbons), none were detected in the groundwater samples. EPH_{w10-19} , EPH_{w19-32} , LEPH, and HEPH were detected in the surface water sample.

5.2 Interpretation of Groundwater Chemistry

Factors that may affect natural groundwater quality include:

- The source and chemical composition of recharge water;
- The lithological and hydrological properties of the geologic unit;



- The various chemical processes occurring within the geologic unit; and
- The amount of time the water has remained in contact with the geologic unit (residence time).

These factors may affect the type and quantities of dissolved constituents in groundwater. The ionic composition of water can be used to classify the water into ionic types based on the dominant dissolved cation and anion, expressed in milliequivalents per litre (meq/L). These can be compared for different water samples using various types of plots.

The ionic compositions of samples from the Site were compared to identify differences in water chemistry by plotting the meq/L concentrations of the samples on three types of diagrams: a Schoeller plot (Figure 7), a Piper diagram (Figure 8), and a Stiff diagram (Figure 9).

- **Schoeller:** The Schoeller semi-logarithmic diagram (Figure 7) shows total concentrations of major cations and anions, and may be used to identify different water types. Here, the Schoeller plot indicates that the chemistry in the water samples is similar, in that the plots generally follow similar trends, with the concentrations in PC-MW12-01 being the highest. Magnesium and sulphate are seen to be the dominant ions.
- **Piper:** The Piper diagram (Figure 8) is used to compare the ratios of major ions and can be used to identify different water types. The Piper diagram illustrates that the groundwater and surface water samples have nearly identical chemistry. Groundwater samples are classified as calcium-sulphate water type water, while the surface water sample is classified as magnesium/calcium-sulphate type water.
- **Stiff:** The stiff diagram allows for differences in groundwater chemistry to be presented and viewed spatially. Here, the stiff diagram shows that all of the samples have similar chemical composition.

None of the samples indicate that landfill leachate from the Facility is influencing groundwater or surface water chemistry.

6.0 CONCLUSIONS

The following conclusions are made based on the results of the 2012 hydrogeological assessment:

- Stratigraphy and Hydrogeology:
 - The regional hydraulic gradient near the Site is expected to follow the regional topography, which slopes south towards Mica Creek.
 - Subsurface conditions were investigated with the installation of three monitoring wells, including PC-MW12-01, PC-MW12-02, and PC-MW12-03, which were completed from July 16 to July 17, 2012, under the supervision of Golder Associates for the establishment of a monitoring well network at the Site;



PELLEY CROSSING SOLID WASTE DISPOSAL FACILITY HYDROGEOLOGICAL ASSESSMENT

- The Site stratigraphy, to the maximum depth drilled (15.5 m), consists of layered sediments composed of silt and sand, with minor clay and gravel;
- A confined water bearing zone was encountered during the drilling and installation of three monitoring wells at a depth of between 5.5 m and 14.6 m below grade;
- A series of hydraulic response tests were performed on all three monitoring wells. The results of these tests indicate the hydraulic conductivity of the surficial water-bearing unit underlying the Site ranges from 4×10^{-6} to 1×10^{-5} m/s. These values are considered reasonable for the units encountered at their respective depths during drilling;
- The horizontal hydraulic gradient at the Site was determined, using monitoring well water level data, to be approximately 0.009 m/m, sloping to the southeast;
- Average linear groundwater seepage velocity in the surficial aquifer is estimated to range between approximately between 7×10^{-8} m/s and 3×10^{-7} m/s (approximately 0.006 to 0.09 metres per day); and
- Based on the groundwater flow direction determined from the initial groundwater monitoring event, PC-MW12-01 is up-gradient of the Site, PC-MW12-03 is located directly downgradient of the waste disposal areas, and PC-MW12-02 is located cross-gradient of the waste disposal areas. This conclusion should be re-evaluated in the spring, and if the requirement of a minimum two downgradient wells has not been met, an additional downgradient well is likely required.

■ Groundwater Chemistry:

- The results of a desktop study and several Site visits indicate that the Yukon Contaminated Sites Regulation (CSR) criteria for freshwater aquatic life are applicable to the Site;
- Groundwater samples were collected from monitoring wells PC-MW12-01, PC-MW12-02, and PC-MW12-03, and a surface water sample was collected from a small pond located approximately 340 m northeast of the Facility, during one sampling event on which occurred from September 9 through September 13, 2012; and
- Results of groundwater sampling at the Site indicated high TDS and background concentration of analytes that may typically be associated with landfill leachate contamination. The sample results indicated acceptable levels of relevant chemical parameters as defined by the CSR criteria for freshwater aquatic life, with the exception of sulphate, which exceeded the standard of 1000 mg/L in all of the samples. This suggests that landfill leachate influence on shallow groundwater underlying the Site is not evident.



7.0 RECOMMENDATIONS

The following recommendations are made based on the results of the hydrogeological assessment presented in this report:

- As required by the Facility's Waste Management Permit, future groundwater monitoring should be conducted twice a year (spring and late summer);
- Due to the absence of contaminants identified in the initial groundwater quality assessment, and the distance of the Site to the nearest populated area, this Facility should be considered to be low concern;
- Monitoring well location, elevation for ground surface, and the elevation of the top of the PVC standpipe (measuring point) should be surveyed for each well by a professional land surveyor, prior to the next monitoring event, to tie wellheads into the regional linkage;
- Groundwater quality at the Facility should be reevaluated following an additional round of groundwater monitoring to determine if there are any potential impacts present from landfill leachate; and
- Since the groundwater flow direction may change seasonally, flow direction should be re-evaluated next spring to affirm whether or not the conditions for one upgradient and two downgradient monitoring wells have been met.

8.0 CLOSURE

We trust that this draft report is adequate for your current needs. Should you have any questions or require any additional information, please contact the undersigned at your convenience.

GOLDER ASSOCIATES LTD.

ORIGINAL SIGNED

Calvin Beebe, M.Sc.
Hydrogeologist

Reviewed By:

ORIGINAL SIGNED

Gary Hamilton, P.Geo.
Principal Hydrogeologist

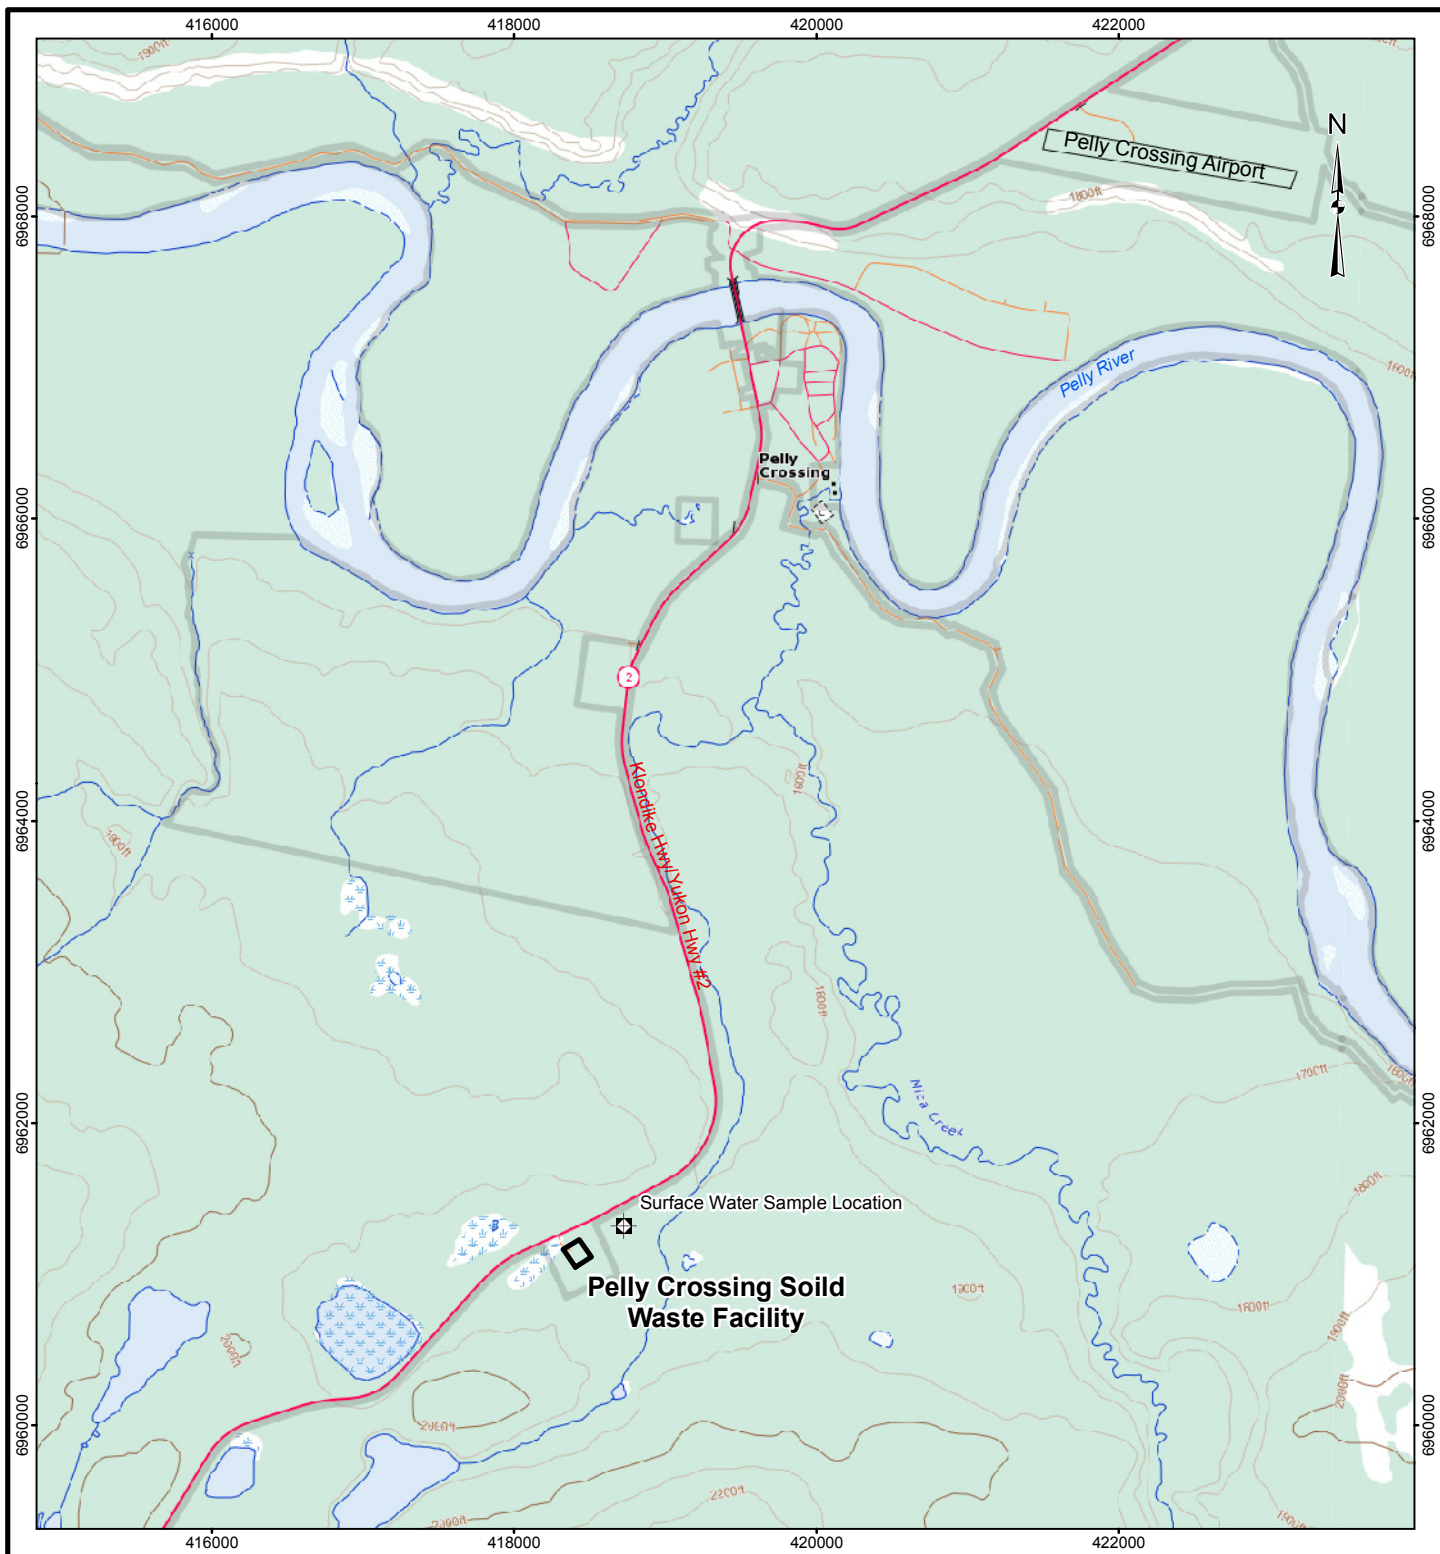
ORIGINAL SIGNED

Guy C. Patrick, P.Eng.
Principal Senior Hydrogeologist

CB\GJH\GCP\syd

o:\final\2011\1436\11-1436-0073\1114360073-513-r-rev0-2400\1114360073-513-r-rev0-2400-hydrogeo assess 22feb_13.docx

N:\Bur_Graphics\Projects\2011\1436\11-1436-0073\GIS\MappingMXD\Hydrogeology\Pelly_Crossing\Figure_01_Key_Plan.mxd



LEGEND

- FACILITY
- SURFACE WATER SAMPLE LOCATION

REFERENCE

BASEDATA OBTAINED FROM GEOGRATIS (NATURAL RESOURCES CANADA).
DATUM: NAD83 PROJECTION: UTM ZONE 8

PROJECT YUKON GOVERNMENT - COMMUNITY SERVICES
SOLID WASTE DISPOSAL FACILITY
PELLY CROSSING, YUKON

TITLE

KEY PLAN

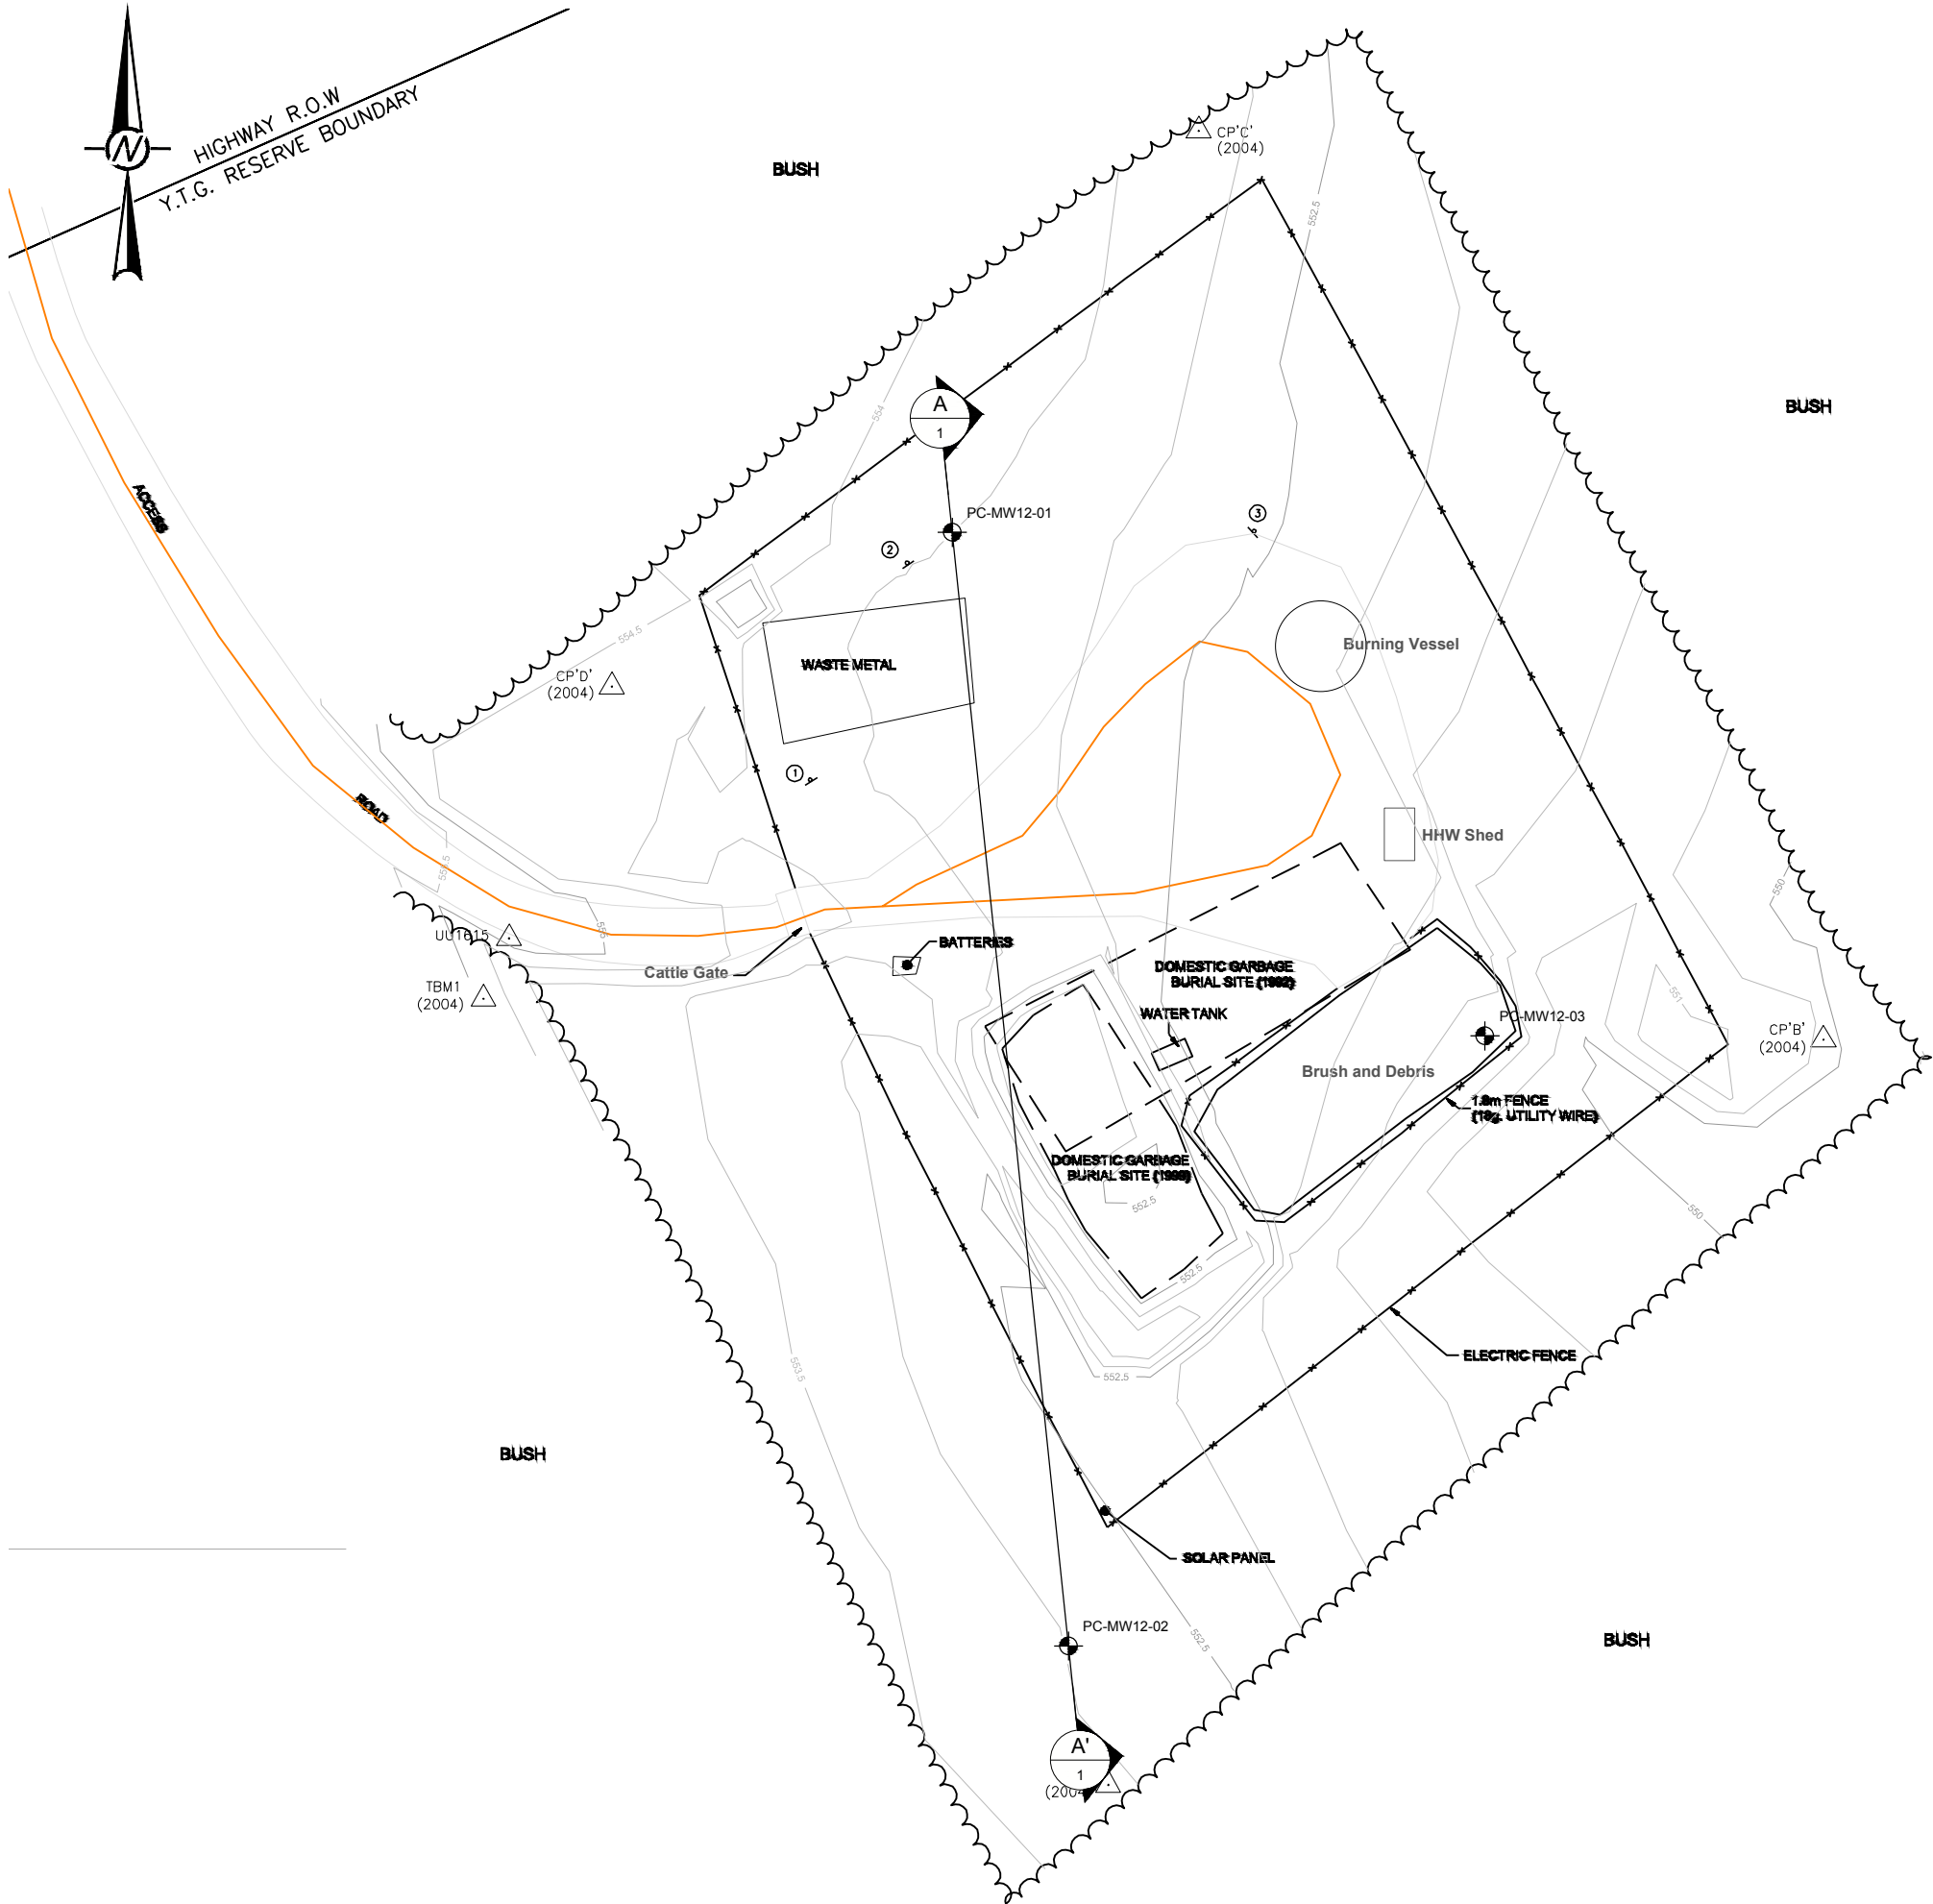


Greater Vancouver Office, B.C.










PROJECT No.	11-1436-0073	PHASE No.	2400
DESIGN	CB	2 Oct. 2012	SCALE AS SHOWN
GIS	DSC	5 Oct. 2012	REV. 0
CHECK			
REVIEW			

FIGURE: 1

N:\Bur-Graphics\Projects\2011\1436\11-1436-0073\Drafting\Phase 2400\2460\11-1436-0073-2400-2460-01.dwg | Layout: FIGURE 2 - SITE PLAN | Modified: mmaitenzzo 06/06/2012 5:36 PM | Plotted: mmaitenzzo 10/04/2012



LEGEND



MONITORING WELL LOCATION
FENCE
EDGE OF CLEARING
SHOULDER OF ROAD
SURVEY CONTROL POINT/BENCHMARK
LEGAL POST - IRON BAR
LEGAL POST - '77
LEGAL POST - '69
SIGN

NOTES

1.

BASE PLAN PROVIDED BY QUEST ENGINEERING GROUP
CAD FILE: PELLY2004.DWG
DATED: 2004.09.15

REFERENCES

1.

SITE PLAN IS NOT CONSISTENT WITH OBSERVED CONDITION DURING DRILLING, BUT IS INTENDED TO SHOW LOCATIONS OF NEWLY INSTALLED MONITORING WELLS IN RELATION TO BURIED STRUCTURES.




PROJECT

YUKON GOVERNMENT-COMMUNITY SERVICES
SOLID WASTE DISPOSAL FACILITY
PELLY CROSSING, YUKON


TITLE

SITE PLAN AND CROSS-SECTION
LOCATION



PROJECT No.	11-1436-0073	FILE No.	11-1436-0073-2400-2460-01	
DESIGN	CB	04OCT12	SCALE	AS SHOWN
CADD	MM	04OCT12		
CHECK				
REVIEW				

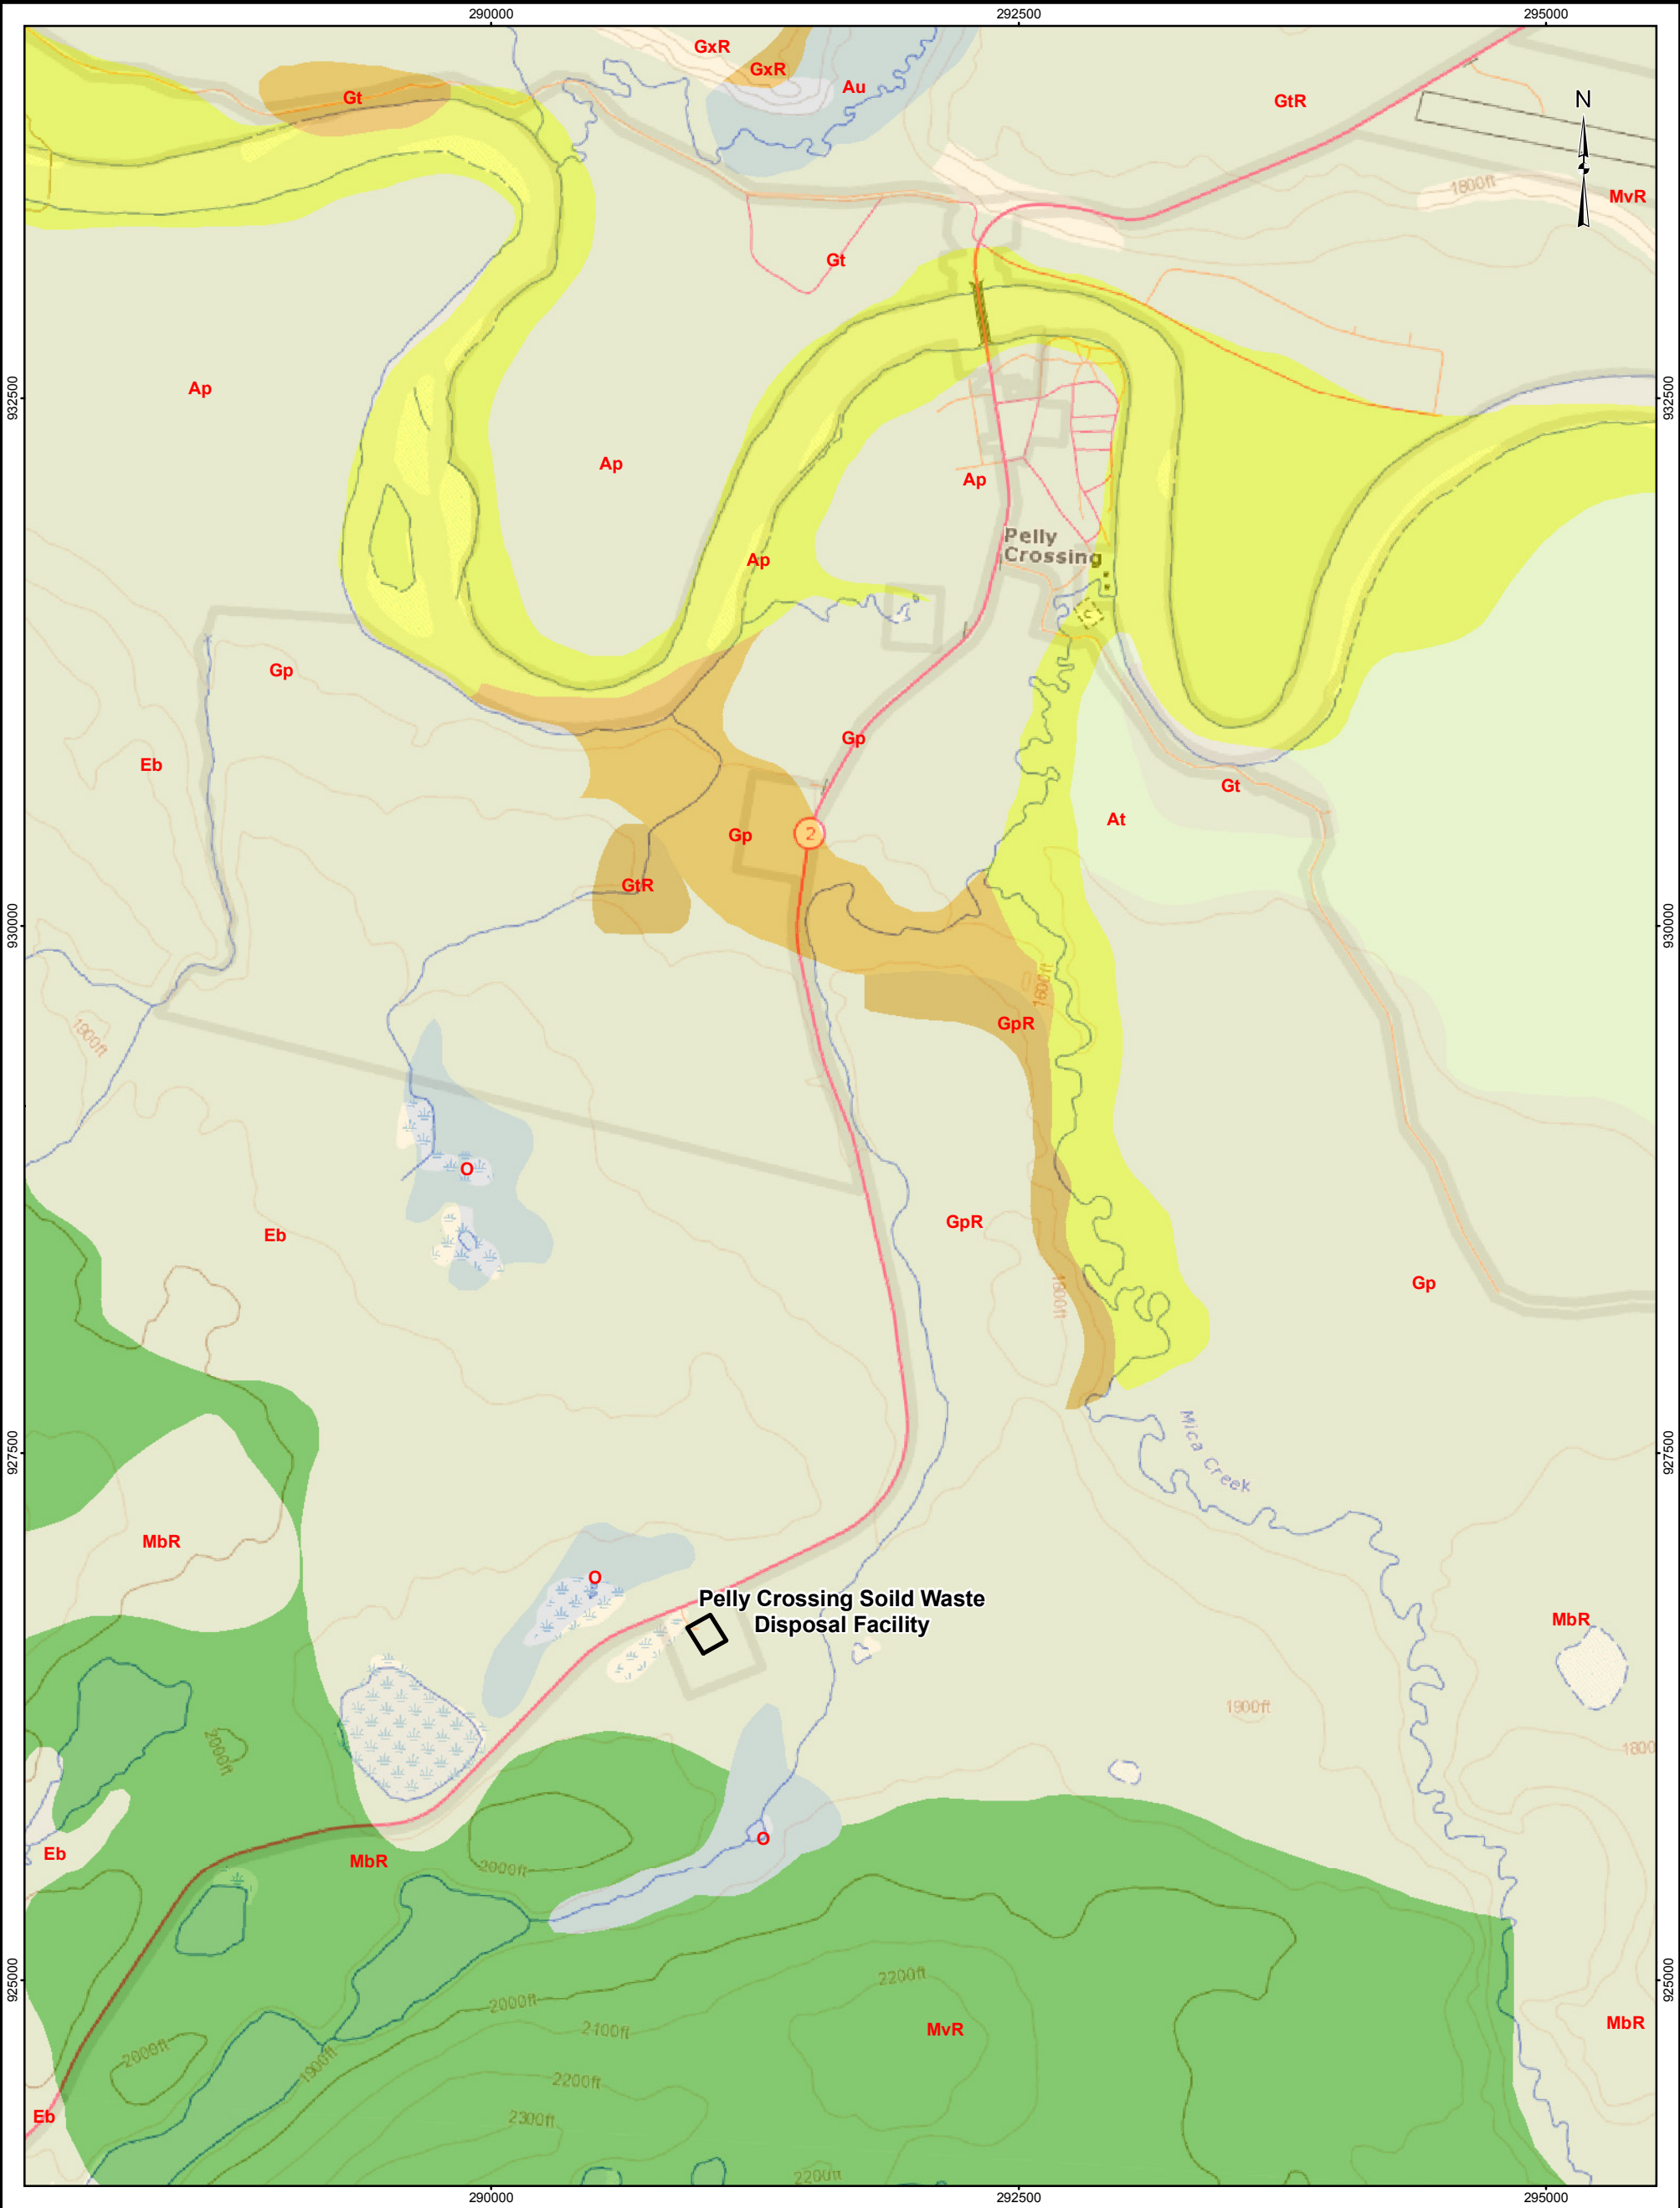FIGURE 2




- LEGEND**
- FACILITY
 - BUILDING
 - MAJOR ROAD
 - WATERCOURSE


REFERENCE

BASEDATA OBTAINED FROM GEOGRATIS (NATURAL RESOURCES CANADA).
SURFICIAL GEOLOGY DATA OBTAINED FROM THE YUKON OVERNMENT, ENERGY, MINES AND RESOUCES.
DATUM: NAD83 PROJECTION: ALBERS




PROJECT YUKON GOVERNMENT - COMMUNITY SERVICES SOLID WASTE DISPOSAL FACILITY PELLY CROSSING, YUKON			
TITLE REGIONAL SURFICIAL GEOLOGY			
 Golder Associates Greater Vancouver Office, B.C.	PROJECT No. 11-1436-0073		PHASE No. 2400
	DESIGN	CB	2 Oct. 2012
	GIS	DSC	4 Oct. 2012
	CHECK		
REVIEW			
			FIGURE: 3

N:\Bur-Graphics\Projects\2011\1436\11-1436-0073\Drafting\Phase 2400\2460\1114360073-2400-2460-02.dwg | Layout: FIGURE 4 | Modified: jhlee 11/07/2012 10:25 AM | Plotted: jhlee 11/07/2012

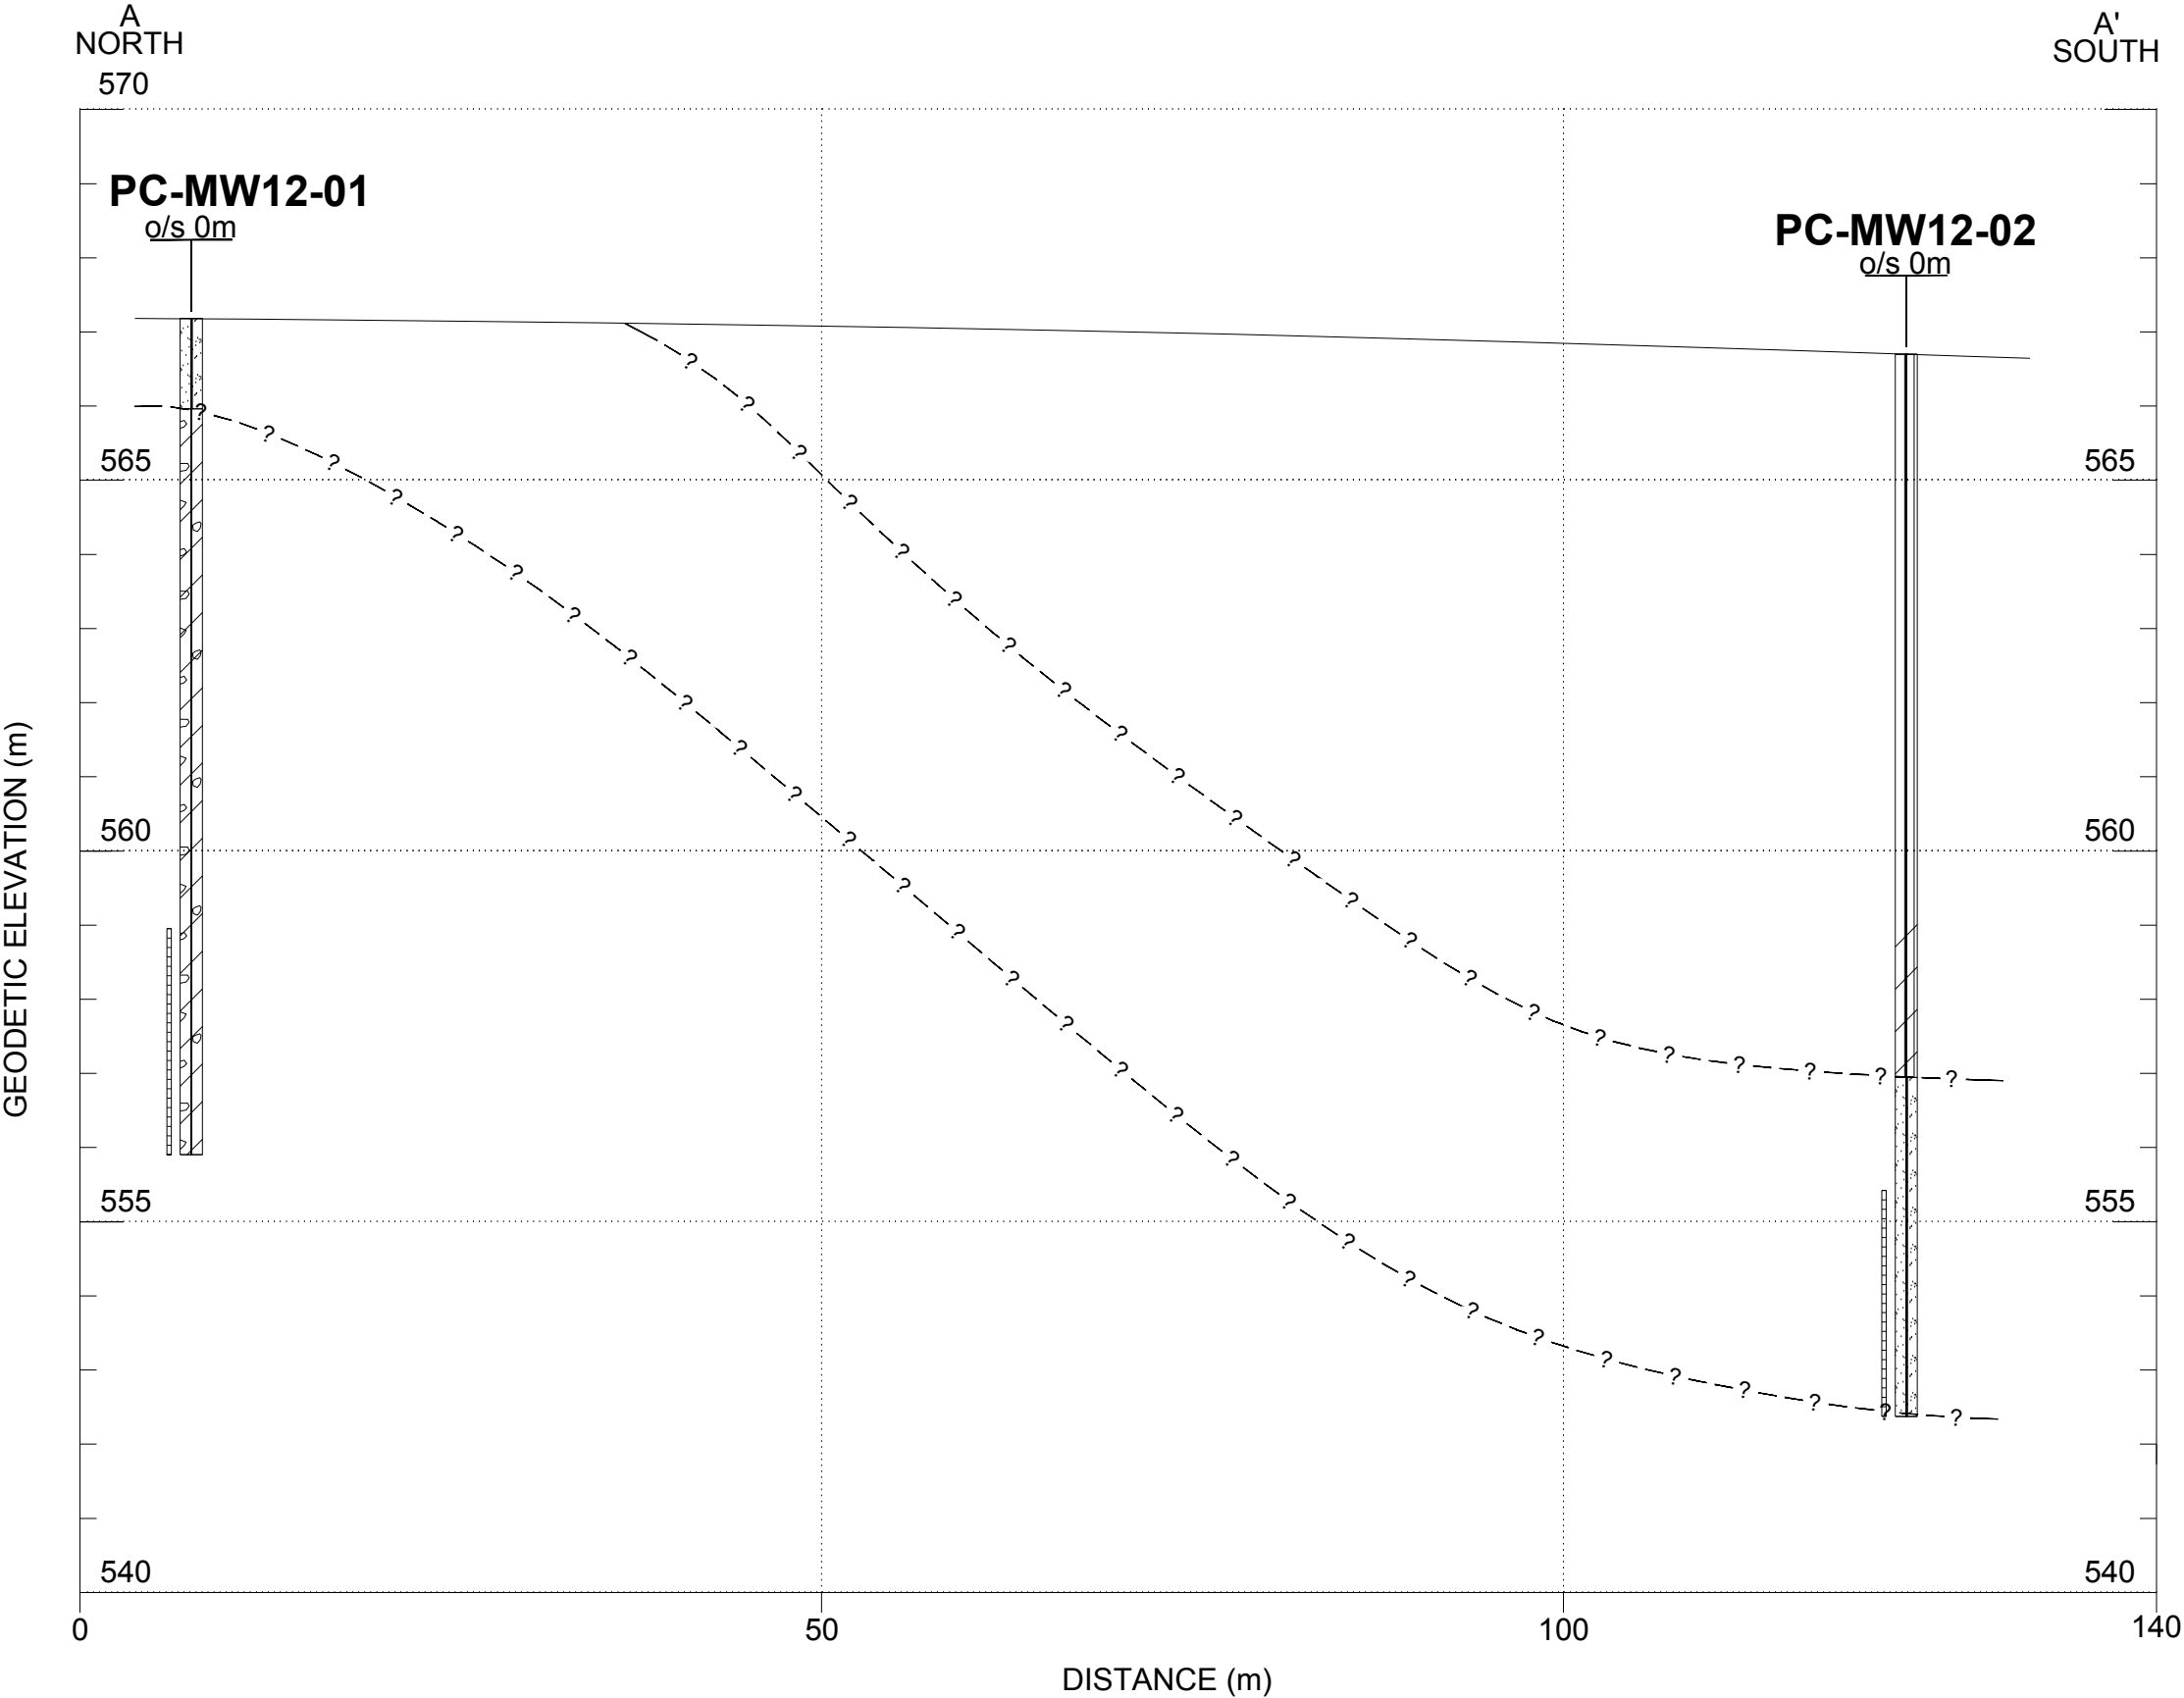


LEGEND

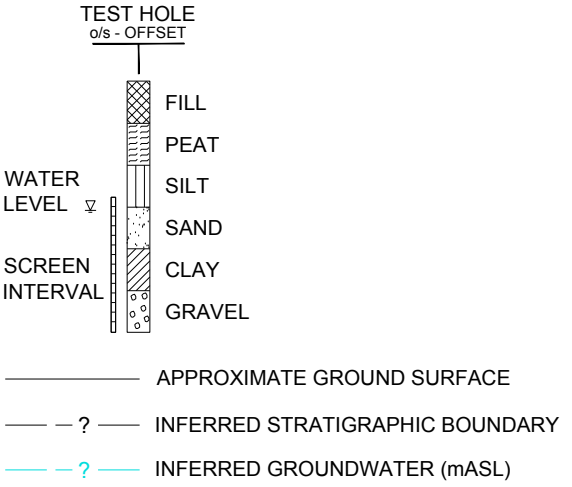
TEST HOLE LOCATION SHOWING INFERRED STRATIGRAPHIC DATA. FOR DETAILED STRATIGRAPHY REFER TO RECORD OF TEST HOLE LOGS IN APPENDIX ?).



SPECIAL NOTE: DATA CONCERNING THE VARIOUS STRATA HAVE BEEN OBTAINED AT TEST HOLE LOCATIONS ONLY. THE SOIL STRATIGRAPHY BETWEEN TEST HOLES HAS BEEN INFERRED FROM GEOLOGICAL EVIDENCE AND MAY VARY FROM THAT SHOWN.



PROJECT			
GOVERNMENT OF YUKON, DEPARTMENT OF COMMUNITY SERVICES PELLY CROSSING, Y.T.			
TITLE			
CONCEPTUAL HYDROGEOLOGICAL CROSS - SECTION A-A'			
	PROJECT No.		11-1436-0073
	FILE No.		1114360073-2400-2460-02
	DESIGN	GJH	24OCT12
	CADD	JHL	07NOV12
	CHECK	GCP	
	REVIEW		
SCALE		AS SHOWN	
		FIGURE 4	

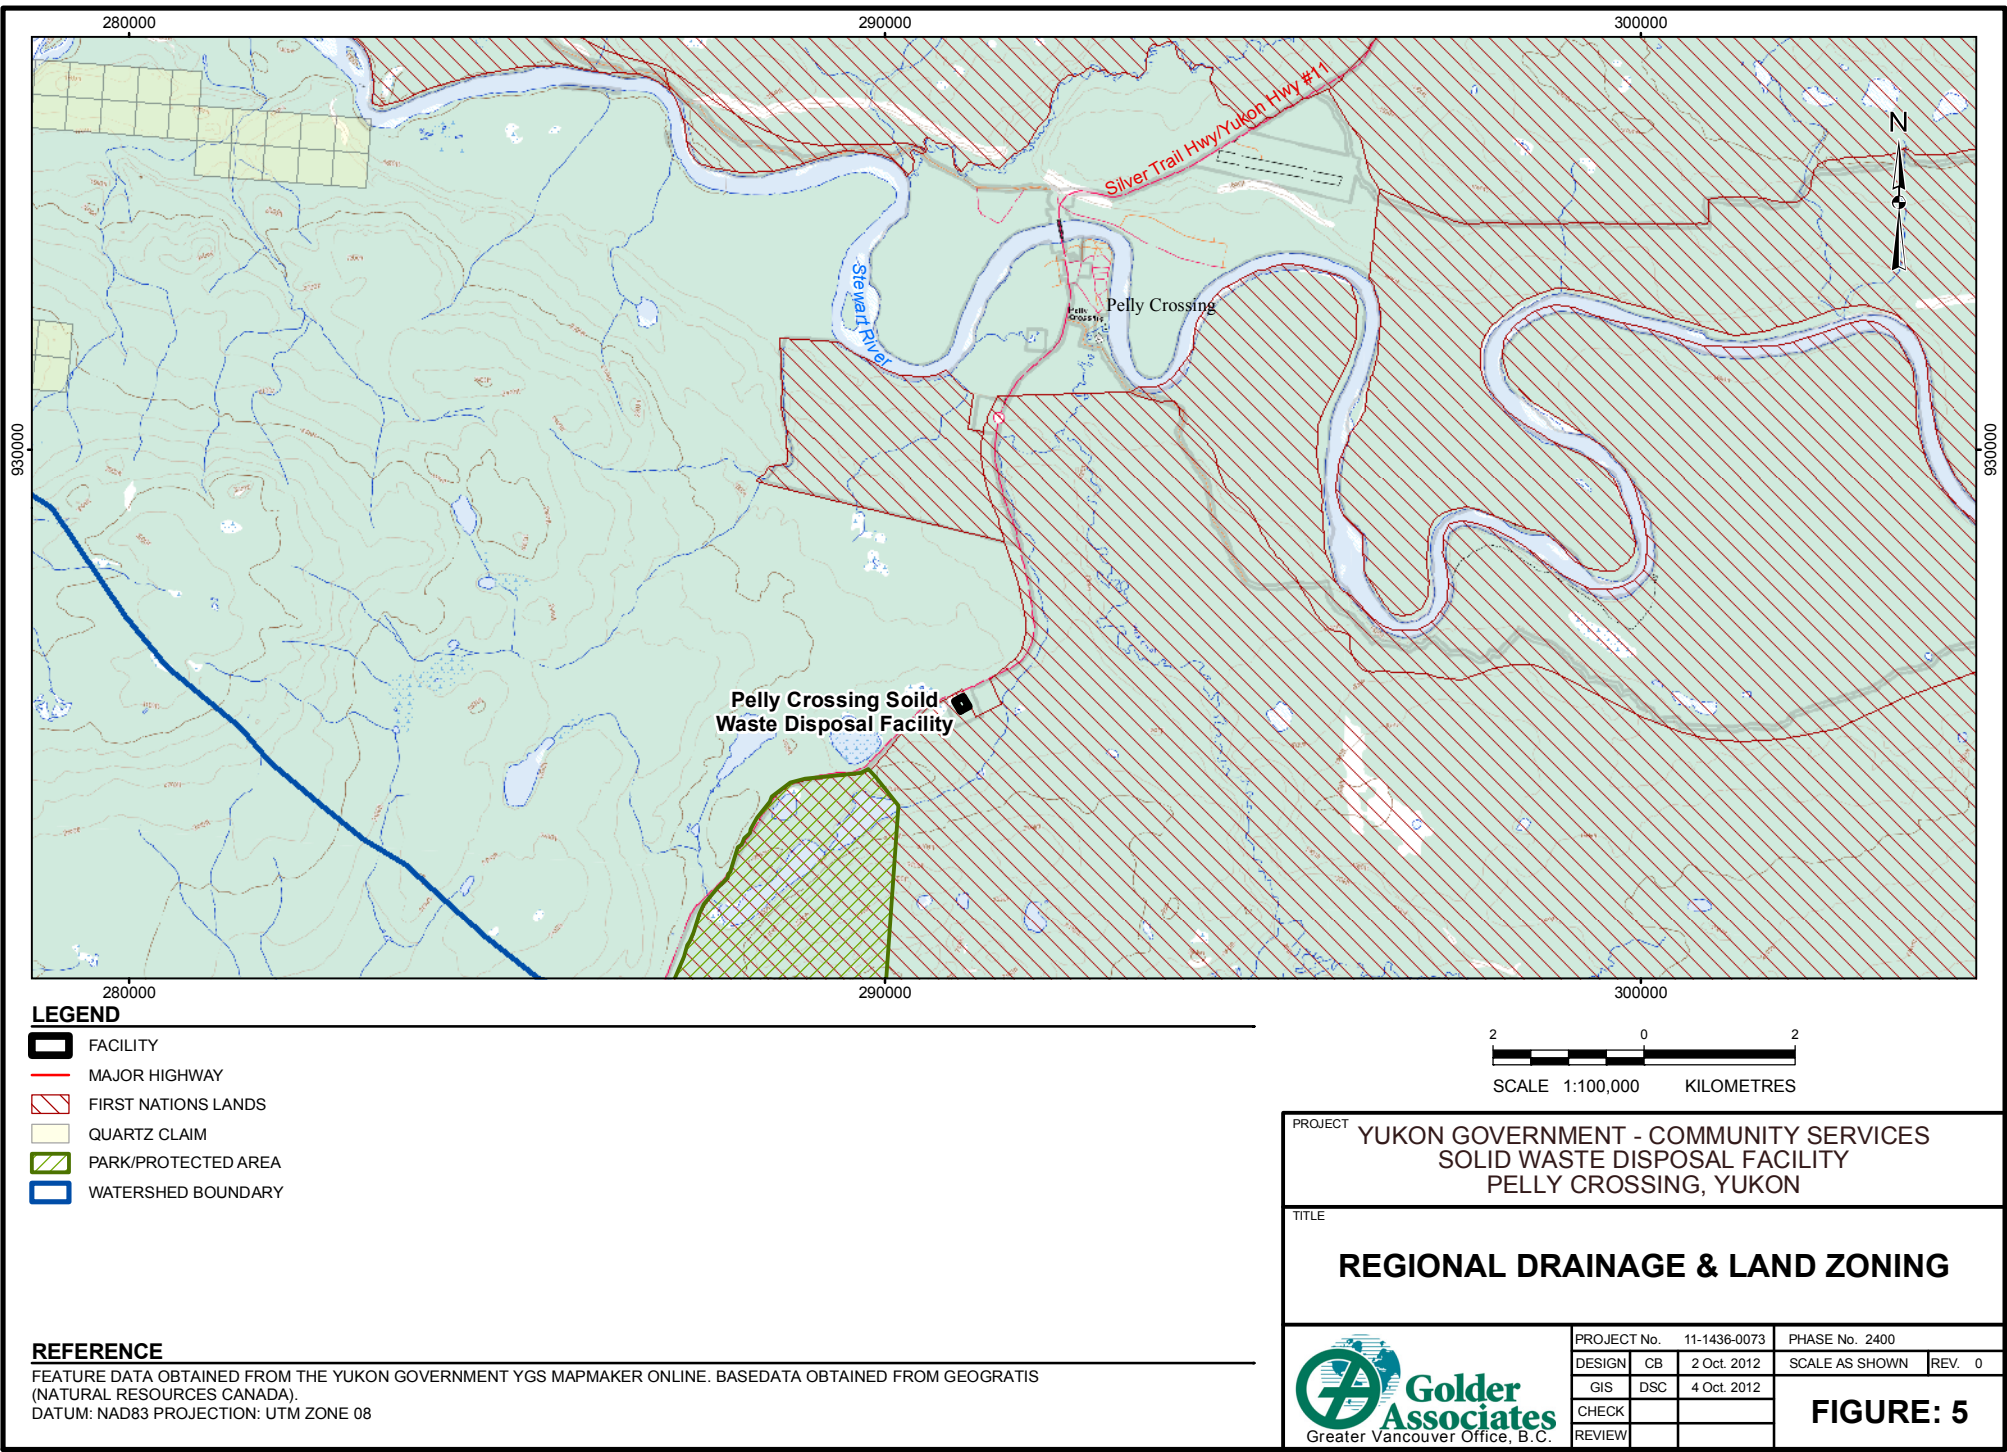




LEGEND

- MONITORING WELL
- GROUNDWATER ELEVATION (MEASURED ON 13 SEPT. 2012)
- GROUNDWATER FLOW DIRECTION
- HYDRAULIC GRADIENT

REFERENCE

IMAGE OBTAINED FROM GOOGLE EARTH, USED UNDER LICENSE.
IMAGERY DATE: AUGUST 17, 2007. GOOGLE EARTH IMAGE IS NOT TO SCALE.
DATUM: NAD83 PROJECTION: UTM ZONE 8



PROJECT YUKON GOVERNMENT - COMMUNITY SERVICES
SOLID WASTE DISPOSAL FACILITY
PELLY CROSSING, YUKON


TITLE

BOREHOLE LOCATION MAP GROUNDWATER ELEVATION



PROJECT No. 11-1436-0073			PHASE No. 2400	
DESIGN	CB	2 Oct. 2012	SCALE AS SHOWN	REV. 0
GIS	DSC	5 Oct. 2012	FIGURE: 6	
CHECK				
REVIEW				

N:\Bur-Graphics\Projects\2011\1436\11-1436-0073\Drafting\Phase 2400\2460\Figures\1114360073-2400-2460-FIG_07.dwg | Layout: ANSI_A_FIG_7 | Modified: jdeal 11/16/2012 3:08 PM | Plotted: jdeal 11/16/2012

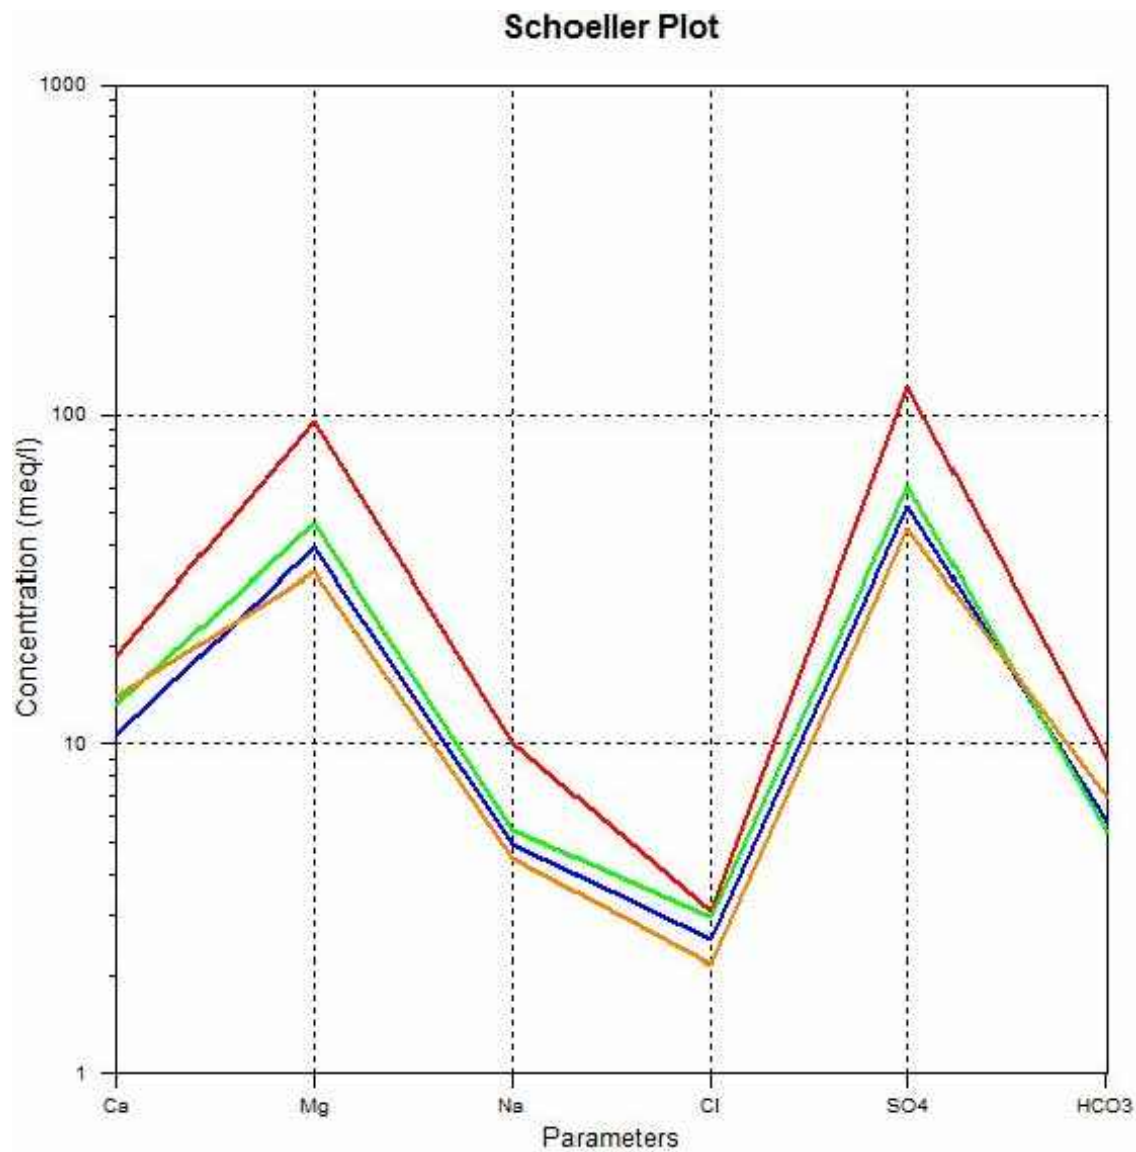

LEGEND

Sample Data
Summer 2012

- PC-MW12-01
- PC-MW12-02
- PC-MW12-03
- Surface Water

PROJECT YUKON GOVERNMENT - COMMUNITY SERVICES
SOLID WASTE DISPOSAL FACILITY
PELLY CROSSING, YUKON


TITLE

SCHOELLER PLOT



PROJECT No.	11-1436-0073	FILE No.	1114360073-2400-2460-FIG_07
DESIGN		SCALE	NOT TO SCALE
CADD	JD	16NOV12	
CHECK			
REVIEW			

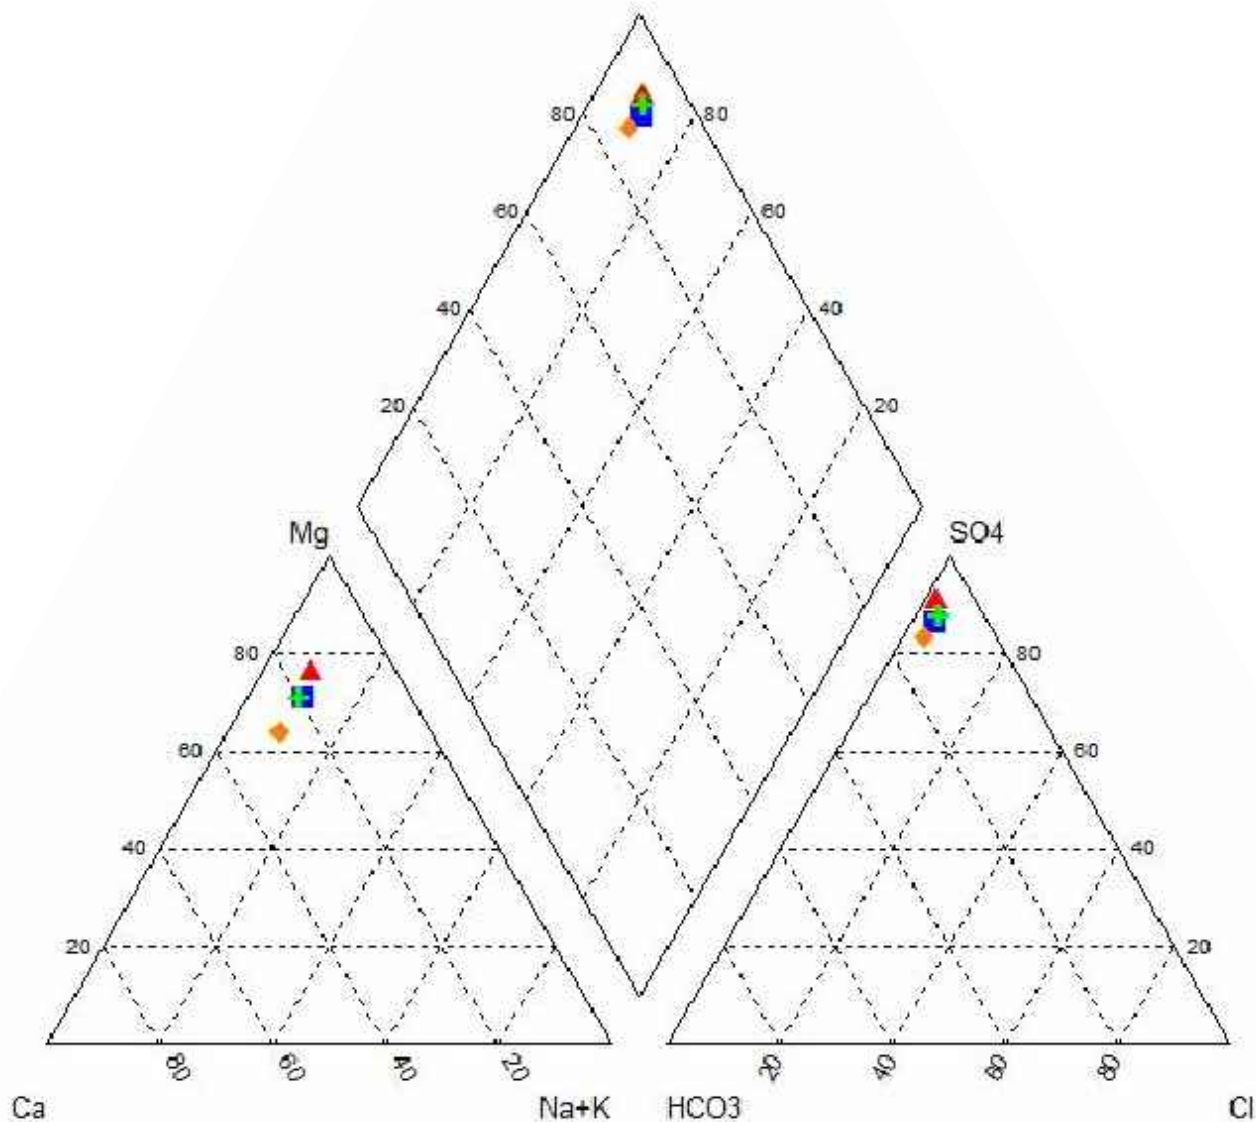FIGURE 7



LEGEND

Sample Data
Summer 2012

- ▲ PC-MW12-01
- PC-MW12-02
- + PC-MW12-03
- ◆ Surface Water

PROJECT YUKON GOVERNMENT - COMMUNITY SERVICES
SOLID WASTE DISPOSAL FACILITY
PELLY CROSSING, YUKON

TITLE


PIPER PLOT



PROJECT No.	11-1436-0073	FILE No.	1114360073-2400-2460-FIG_08
DESIGN		SCALE	NOT TO SCALE
CADD	JD	16NOV12	
CHECK			
REVIEW			

FIGURE 8

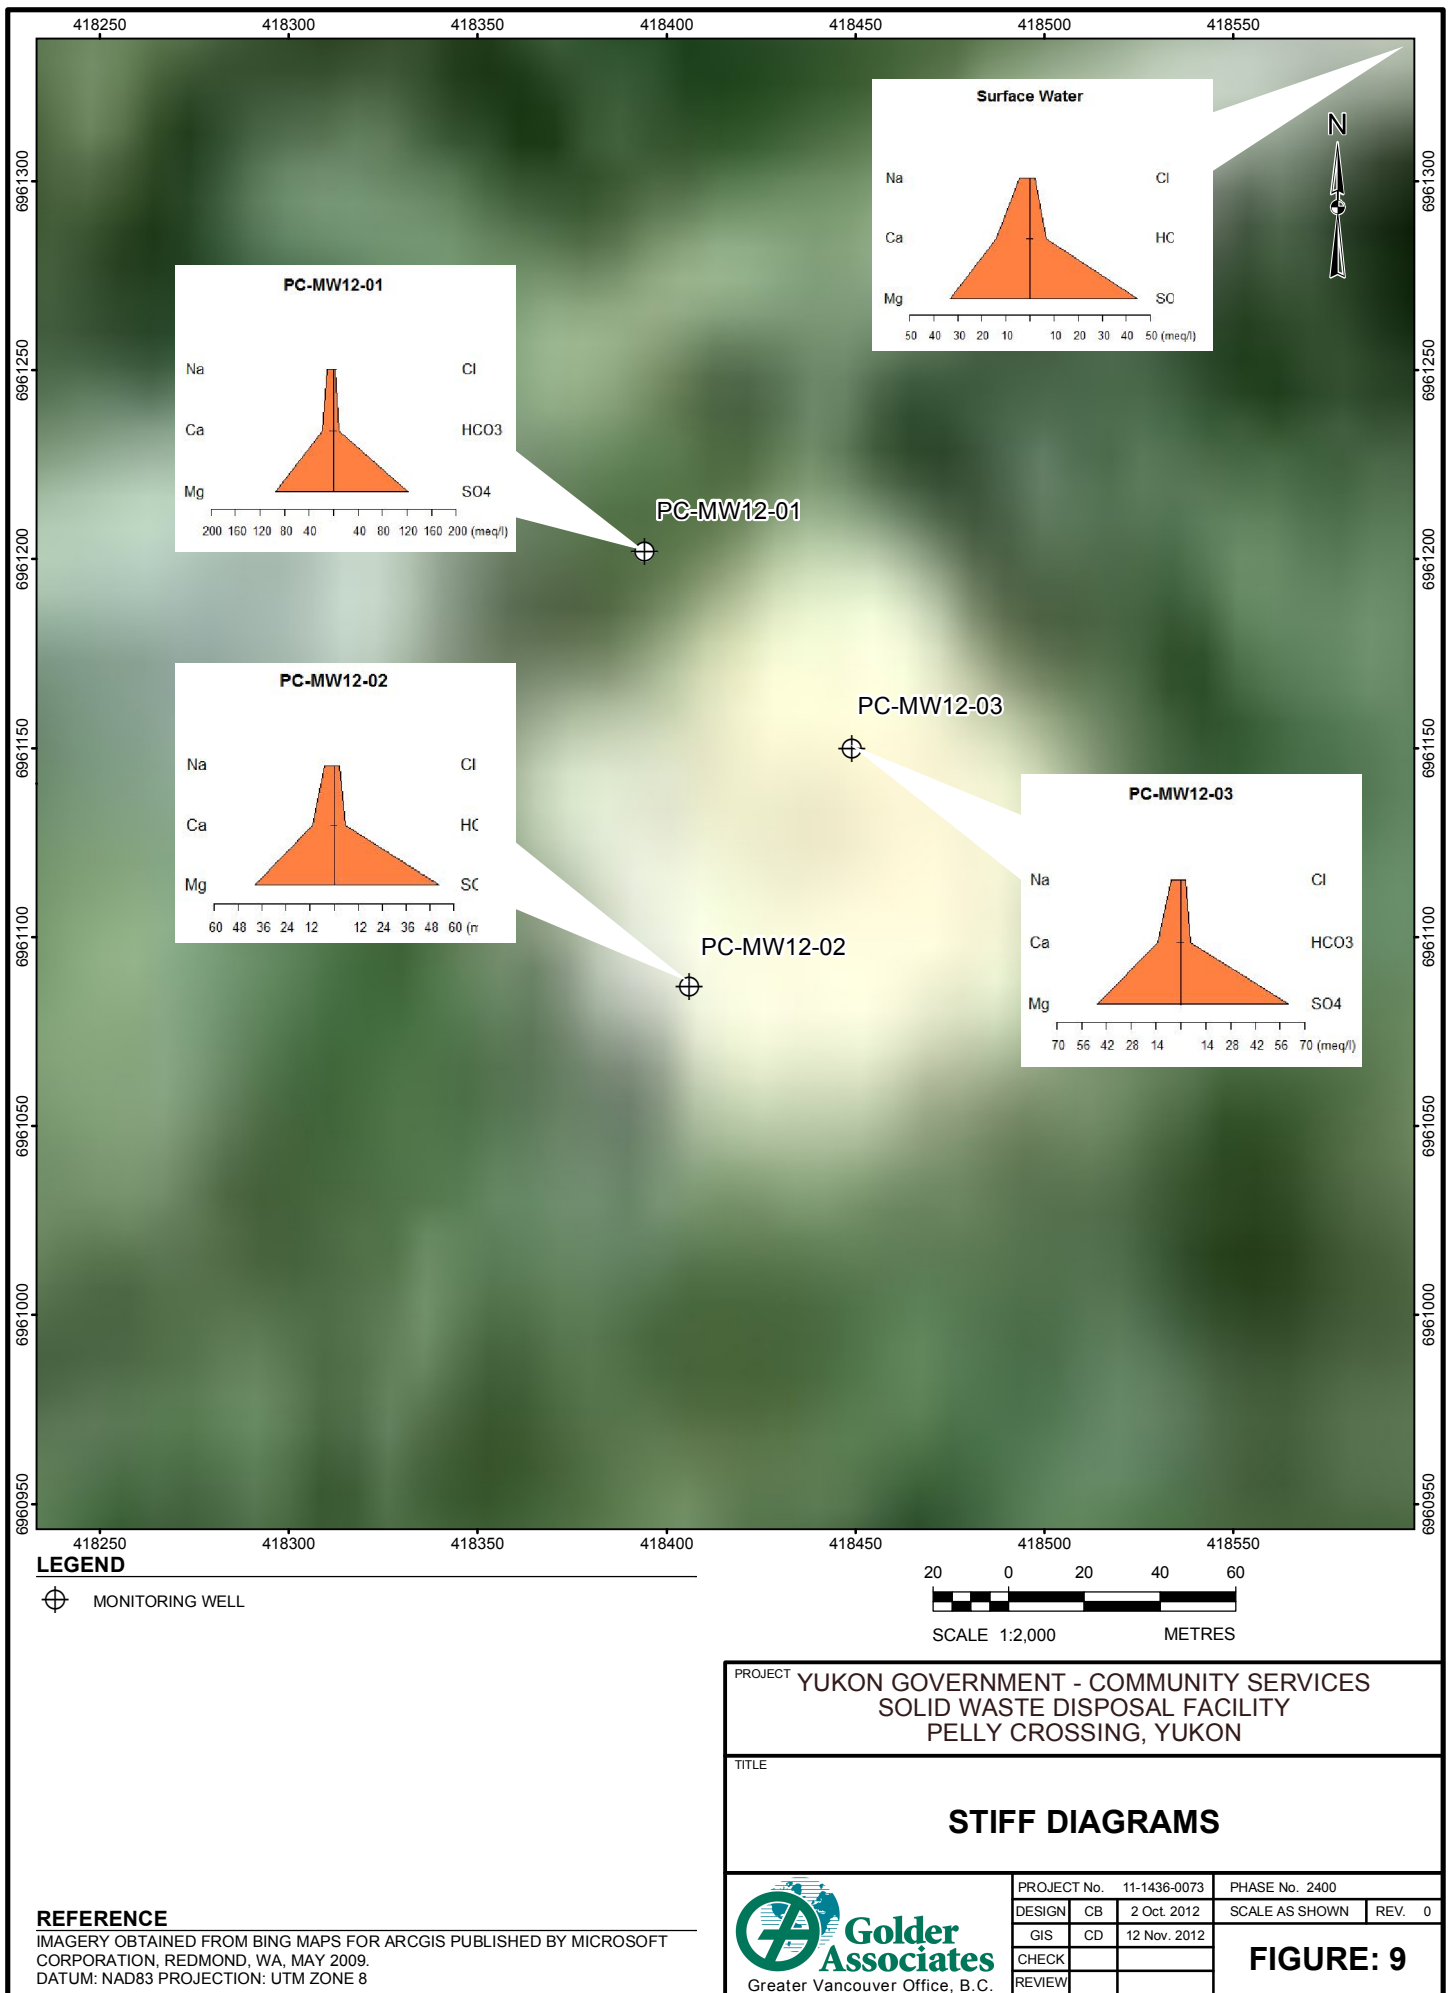\\golder.gds\gait\Burnaby\CAD-GIS\Bur-Graphics\Projects\2011\11-1436-0073\GIS\Mapping\MXD\Hydrogeology\Pelly_Crossing\Figure_09_Stiff_Diagrams.mxd





APPENDIX A

Site Photographs



APPENDIX A

Site Photographs



Photograph 1: A view looking down the southwest side of the Site from near the entrance.



Photograph 2: The east corner of the Site near the brush and debris disposal area.



APPENDIX A

Site Photographs



Photograph 3: Looking north across the Site at the brush and debris segregation area and the burn vessel.



Photograph 4: A view from behind the burn vessel looking south.

o:\final\2011\1436\11-1436-0073\1114360073-513-r-rev0-2400\appendices\app a\site photos.docx



APPENDIX B

Well Construction Logs

SHEET 1 OF 2
DATUM:

DRILLING DATE: July 16, 2012
DRILLING CONTRACTOR: Midnight Sun Drilling

DEPTH SCALE
1 : 50



CLIENT: Yukon Government Community Services
PROJECT: Yukon Landfill Assessment
LOCATION: Pelly Crossing Solid Waste Facility

DRILLING DATE: July 16, 2012
DRILLING CONTRACTOR: Midnight Sun Drilling

[illegible]

DEPTH SCALE

1 : 50

LOGGED: CB/AB

CHECKED: **DRAFT**

CLIENT: Yukon Government Community Services
PROJECT: Yukon Landfill Assessment
LOCATION: Pelly Crossing Solid Waste Facility

DRILLING DATE: July 17, 2012
DRILLING CONTRACTOR: Midnight Sun Drilling

[illegible]

DEPTH SCALE

1 : 50

LOGGED: CB/AB

CHECKED: **DRAFT**

PROJECT No.: 11-1436-0073 (2400)

RECORD OF MONITORING WELL: PC-MW12-02SHEET 2 OF 2
DATUM:CLIENT: Yukon Government Community Services
PROJECT: Yukon Landfill Assessment
LOCATION: Pelly Crossing Solid Waste FacilityDRILLING DATE: July 17, 2012
DRILLING CONTRACTOR: Midnight Sun Drilling

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES				PID ppm		WATER CONTENT PERCENT Wp — W — Wi	ADDITIONAL LAB. TESTING	PIEZOMETER, STANDPIPE OR THERMISTOR INSTALLATION
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	CORE No.	CORE RECOVERY %			
10	MS Driltech Truck Mounted Auger Drill Rig Air Rotary	(SM) SILTY SAND, trace gravel, dark grey, moist. <i>(continued)</i>										10/20 Silica Sand
11		- water at 11.28m depth.										
12												
13												
14												51mm Slotted PVC Pipe
15	End of Monitoring Well.	14.33										
16												
17												
18												
19												
20												

DEPTH SCALE

1 : 50



LOGGED: CB/AB

CHECKED: **DRAFT**

PROJECT No.: 11-1436-0073 (2400)

RECORD OF MONITORING WELL: PC-MW12-03SHEET 1 OF 2
DATUM:CLIENT: Yukon Government Community Services
PROJECT: Yukon Landfill Assessment
LOCATION: Pelly Crossing Solid Waste FacilityDRILLING DATE: July 18, 2012
DRILLING CONTRACTOR: Midnight Sun Drilling

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES				PID ppm		WATER CONTENT PERCENT Wp — W — Wi	ADDITIONAL LAB. TESTING	PIEZOMETER, STANDPIPE OR THERMISTOR INSTALLATION
		DESCRIPTION	STRATA PLOT ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	CORE No.	CORE RECOVERY %	5			
0	M5 Drilltech Truck Mounted Auger Drill Rig Air Rotary	Ground Surface (SM) SILTY SAND, some gravel, dark grey, moist.	0.00									Stickup = 0.75m
1												
2												
3												
4												
5												
6												
7												
8												
9												
10		(SM-GM) SILTY SAND and GRAVEL, dark grey, moist.	9.14									Bentonite Seal
CONTINUED NEXT PAGE												

DEPTH SCALE

1 : 50



LOGGED: CB/AB

CHECKED: **DRAFT**

PROJECT No.: 11-1436-0073 (2400)

RECORD OF MONITORING WELL: PC-MW12-03SHEET 2 OF 2
DATUM:CLIENT: Yukon Government Community Services
PROJECT: Yukon Landfill Assessment
LOCATION: Pelly Crossing Solid Waste FacilityDRILLING DATE: July 18, 2012
DRILLING CONTRACTOR: Midnight Sun Drilling

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES				PID ppm		WATER CONTENT PERCENT		ADDITIONAL LAB. TESTING	PIEZOMETER, STANDPIPE OR THERMISTOR INSTALLATION	
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	CORE No.	CORE RECOVERY %	Wp I — W — I Wi				
										5	10			15
10	M5 Driltech Truck Mounted Auger Drill Rig Air Rotary	(SM-GM) SILTY SAND and GRAVEL, dark grey, moist. <i>(continued)</i>											Bentonite Seal 10/20 Silica Sand 51mm Slotted PVC Pipe	
11														
12		(ML) SILT, some sand, dark brown, moist.		11.58										
13														
14														
15		(SM) SILTY SAND, dark brown, wet.		14.63										
16		End of Monitoring Well.		15.54										
17														
18														
19														
20														

DEPTH SCALE

1 : 50




LOGGED: CB/AB

CHECKED: **DRAFT**



APPENDIX C

Well Development and Sampling Sheets



GROUNDWATER DEVELOPMENT AND PURGING/SAMPLING DATA SHEET

☒ Development
☐ Purging/Sampling

Well No.: PC-MW12-01 Project No.: 11-1436-0073 12400
Location: PELUY CROSSING Date: 09-SEP-12 Time: 14:45
Weather: 12-15°C Temperature: 5°C Completed by: A. B. ADGER

MONITORING WELL INFORMATION

Time of Measurement: 14:45 Tidally Influenced: ☐ Yes ☒ No
Depth to product: _____ Product thickness: _____ One well volume: _____
Depth to water Below Top of Casing: A 2.80 metres (B-A)*2.0 = 19.31 19.62 litres - for a 51 mm (2.0 inch) diameter well
Depth to Bottom of Well Below Top of Casing: B 12.11 metres (B-A)*1.1 = _____ litres - for a 38 mm (1.5 inch) diameter well
Diameter Standpipe: C _____ mm Sample intake depth: _____ metres

EQUIPMENT LIST

YSE 556 MPS
pH and Temp. Meter: Model _____ Serial No. _____ Calibration Buffers: 4 7 10
Conductivity Meter: Model _____ Serial No. _____ Calibration Solution: 1413
Dissolved Oxygen Meter: Model _____ Serial No. _____ ☐ D.O. Chemet Ampoule
Pump: ☐ None ☒ Waterra ☐ Peristaltic ☐ Submersible ☐ Bailer Type: _____
Pump Details: _____

WELL DEVELOPMENT/PURGING

Purge Volume: Well Vol. X 19.623 = 57 litres
Avg. Flow Rate: _____ L/min. Start: 15:01 Finish: 15:28

Time	Volume Removed (L)	Temp. (°C)	pH (Units)	Cond. (uS/cm)	Redox (mV)	Diss. O ₂ (mg/L) or %	Water Level (m)	Remarks
15:02	1	3.5	6.7	9409				
15:06	9	2.04	7.07	9476			4.90	
15:10	19	1.83	7.19	9772			5.55	
15:13	28	1.32	7.25	10022			6.10	
15:17	36	1.67	7.28	9986			6.97	
15:20	45	1.56	7.30	10103	10069			
15:22	54	1.39	7.32	10232			7.64	
15:28	60	1.59	7.36	10248			7.58	SAMPLE COLLECTED

Comments:

Odour: ☐ Yes ☐ No If yes _____
Sheen: ☐ Yes ☐ No If yes _____ Hydrocarbon-like ☐ OR Metallic-like ☐
Turbidity: Clear ||||| Very Silty

Analysis	Type	Container Size							Filtered		Preservatives
		40 mL	100 mL	250 mL	500 mL	1 L	2 L	4 L			
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		

SCN No. _____ Consumables: ☐ Waterra Tubing _____ ☐ HDPE/Teflon Tubing _____ ☐ Groundwater Filter _____
Field Dup. _____ ☐ Silicon Tubing _____ ☐ D.O. Ampoules _____ ☐ _____

GROUNDWATER DEVELOPMENT AND PURGING/SAMPLING DATA SHEET

☐ Development
☒ Purging/Sampling

Well No.: PC-MW12-02 Project No.: 11-1436-0073/2400
Location: PELLEY CROSSING Date: 10 SEP-12 Time: 9:45
Weather: OVERCAST Temperature: 10.1°C Completed by: A B ADGER

MONITORING WELL INFORMATION

Time of Measurement: 9:45 Tidally Influenced: ☐ Yes ☒ No
Depth to product: _____ Product thickness: _____ One well volume: _____
Depth to water Below Top of Casing: A 2.74 metres (B-A)*2.0 = 12.74.2 25.5 litres - for a 51 mm (2.0 inch) diameter well
Depth to Bottom of Well Below Top of Casing: B 15.48 metres (B-A)*1.1 = _____ litres - for a 38 mm (1.5 inch) diameter well
Diameter Standpipe: C _____ mm Sample intake depth: _____ metres

EQUIPMENT LIST

pH and Temp. Meter: Model _____ Serial No. _____ Calibration Buffers: ☒ 4 ☒ 7 ☐ 10
Conductivity Meter: Model _____ Serial No. _____ Calibration Solution: 1413
Dissolved Oxygen Meter: Model _____ Serial No. _____ ☐ D.O. Chemet Ampoule
Pump: ☐ None ☒ Watterra ☐ Peristaltic ☐ Submersible ☐ Bailer Type: _____
Pump Details: _____

WELL DEVELOPMENT/PURGING

Purge Volume: Well Vol. X 285.3 = 76.5 litres
Avg. Flow Rate: _____ L/min. Start: 9:50 Finish: 10:17

Time	Volume Removed (L)	Temp. (°C)	pH (Units)	Cond. (uS/cm)	Redox (mV)	Diss. O ₂ (mg/L) or %	Water Level (m)	Remarks
9:50	1	1.61	6.94	12715				
9:54	15	2.39	7.26	12825			3.02	
9:58	30	1.34	7.41	12981				
10:03	45	1.23	7.43	13047			3.29	
10:08	60	1.17	7.46	13052	13052			
10:12	75	1.23	7.46	13034			3.43	
10:17	90	1.13	7.48	13066			3.47	SAMPLE COLLECTED

Comments:

Odour: ☐ Yes ☐ No If yes _____
Sheen: ☐ Yes ☐ No If yes _____ Hydrocarbon-like ☐ OR Metallic-like ☐
Turbidity: Clear ||||| Very Silty

Analysis	Type	Container Size							Filtered		Preservatives
		40 mL	100 mL	250 mL	500 mL	1 L	2 L	4 L			
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		
	<input type="checkbox"/> Plastic <input type="checkbox"/> Glass								<input type="checkbox"/> Yes <input type="checkbox"/> No		

SCN No. _____ Consumables: ☐ Watterra Tubing ☐ HDPE/Teflon Tubing ☐ Groundwater Filter _____
Field Dup. _____ ☐ Silicon Tubing ☐ D.O. Ampoules _____

- ☒ Development
- ☐ Purging/Sampling

Well No.: PC-MW12-03
Location: PULLY CROSSING
Weather: OVERCAST Temperature: 1°C

Project No.: 11-1436-0073 12406
Date: 10 SEP 12 Time: 10:50
Completed by: A. RADNER

MONITORING WELL INFORMATION

Time of Measurement: 10:50

Depth to product: _____ Product thickness: _____

Depth to water Below Top of Casing: A 143 metres

Depth to Bottom of Well Below Top of Casing: B 1640 metres

Diameter Standpipe: C _____ mm

Tidally influenced: ☐ Yes ☒ No

One well volume: _____ litres - for a 51 mm (2.0 inch) diameter well

(B-A)*2.0 = 14.97.2 30 litres - for a 38 mm (1.5 inch) diameter well

(B-A)*1.1 = _____ litres - for a 38 mm (1.5 inch) diameter well

Sample intake depth: _____ metres

EQUIPMENT LIST

pH and Temp. Meter: Model _____ Serial No. _____ Calibration Buffers: ☒ 4 ☒ 7 ☐ 10
Conductivity Meter: Model _____ Serial No. _____ Calibration Solution: 1413
Dissolved Oxygen Meter: Model _____ Serial No. _____ ☐ D.O. Chemet Ampoule
Pump: ☐ None ☒ Waterra ☐ Peristaltic ☐ Submersible ☐ Bailer Type: _____
Pump Details: _____

WELL DEVELOPMENT/PURGING

Purge Volume: Well. Vol: X 7.80 = 90 litres
Avg. Flow Rate: _____ L/min. Start: 11:00 Finish: 11:21

[illegible]

Comments:

Odour: ☐ Yes ☒ No If yes _____

Sheen: ☐ Yes ☒ No If yes Hydrocarbon-like ☐ OR Metallic-like ☐

Turbidity: Clear | | | | | | | | | | | | | | | | | | | | Very Silty

Analysis	Type		Container Size							Filtered		Preservatives
			40 mL	100 mL	250 mL	500 mL	1 L	2 L	4 L			
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	

SCN No. _____ Consumables: ☐ Waterra Tubing _____ ☐ HDPE/Teflon Tubing _____ ☐ Groundwater Filter _____
Field Dup. _____ ☐ Silicon Tubing _____ ☐ D.O. Ampoules _____ ☐ _____

- ☒ Field Characterization
- ☒ Sampling

Project No. 11.1436.0073/2400
Completed By: A BADGER
Date: 13 SEP. 12
Time: 13:30
Reviewed By:

pH and Temp. Meter: Model _____ Serial No. _____ Calibration Buffers: ☒ 4 ☐ 7 ☐ 10
Conductivity Meter: Model _____ Serial No. _____ Calibration Solution: 1413
Dissolved Oxygen Meter: Model _____ Serial No. _____ ☐ D.O. Chemet Ampoule
Pump: ☒ None ☐ Waterra ☐ Peristaltic ☐ Submersible Bailer: ☐ None ☐ Stainless Steel ☐ Teflon ☐ PVC
Sample Depth: SURFACE

[illegible][illegible]

Analysis	Type		Container Size						Filtered		Preservatives	
			40 mL	100 mL	250 mL	500 mL	1 L	2 L				4 L
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	
	<input type="checkbox"/> Plastic	<input type="checkbox"/> Glass								<input type="checkbox"/> Yes	<input type="checkbox"/> No	

SCN No. _____ Consumables: ☐ D.O. Ampoules _____ ☐ Alkalinity Test _____ ☐ Other _____



APPENDIX D

Slug Test Data

☒ Falling Head

Well No.: PC-MW12-01

Location: 08 V 041 8394 6 961202

Project No.: 11-14136-0073 / 2400

Completed By: A BAOGER

Date: 13 SEP 12

Time: 13:50

MONITORING WELL INFORMATION

Depth to water below top of casing:	<u>5.17</u>	meters	
Depth to bottom of well below top of casing:	<u>12.03</u>	meters	
Distance from top of pipe to ground surface:	<u>0.77</u>	meters	
Well casing diameter:	<u>0.05</u>	meters	(1 inch = 0.025 meters)
Borehole diameter:	<u> </u>	meters	
Screen length:	<u> </u>	meters	(1 foot = 0.3048 meters)
Screened unit:			(eg: sand, silt, clay)

EQUIPMENT LIST

☒ Slug ☐ Bailer

Mass: _____ kilograms

Length: 1.0 meters

Diameter: 0.0375 meters

Water column height: _____ meters

Inside diameter: _____ meters

and/or Volume of water removed: _____ litres

Pressure transducer serial #: 0011032680

Sampling Interval: _____ seconds or minutes (circle one)

SINGLE-WELL RESPONSE TEST

Start time: 13:56 Finish time: 15:02

[illegible]

☒ Falling Head[illegible]

☐ Rising Head

☒ Falling Head

MONITORING WELL INFORMATION

EQUIPMENT LIST

SINGLE-WELL RESPONSE TEST

[illegible]



APPENDIX E

Analytical Reports and Chain of Custody Forms

Table E-1
Results of Water Analyses - Metals
[YTG Landfill Monitoring, Pelly Crossing, Yukon]

SCN Location QA/QC Date	Aquatic Life CSR-AW (freshwater)	Notes	L1209363-4	L1209363-1	L1209363-2	L1209363-3
			PC-SURFACE	PC-MW12-01	PC-MW12-02	PC-MW12-03
			13-SEP-12	09-SEP-12	10-SEP-12	10-SEP-12
Parameters						
pH (field)			7.38	7.36	7.48	7.39
Temperature °C			7.30	1.58	1.13	1.56
Conductivity (uS/cm)			9482	10248	13066	14876
Dissolved Oxygen (mg/L)			-	-	-	-
Laboratory Parameters						
pH (laboratory)			8.13	7.83	7.93	7.87
Hardness (as CaCO3)			2350	5720	2500	3010
total dissolved solids			3870	8890	3970	4690
Aggregate Organics						
COD			218	123	56	81
dissolved organic carbon			68.6	33.8	17.2	18.1
Bacteriological						
Coliform Bacteria - Fecal			-	-	-	-
Dissolved Metals						
aluminum			<0.050	<0.10	<0.050	<0.050
antimony	0.2		<0.0025	<0.0050	<0.0025	<0.0025
arsenic	0.05		0.00134	0.0083	0.00855	0.00699
barium	10		<0.10	<0.20	<0.10	<0.10
beryllium	0.053		<0.0050	<0.010	<0.0050	<0.0050
bismuth			<0.20	<0.40	<0.20	<0.20
boron			<0.50	<1.0	<0.50	<0.50
cadmium	0.0001 - 0.0006	H	<0.0010	<0.0020	<0.0010	<0.0010
calcium			278.0	372.0	213	263
chromium	0.010 ^{VI} , 0.090 ^{III}	V	<0.010	<0.020	<0.010	<0.010
cobalt	0.009		<0.010	<0.020	<0.010	<0.010
copper	0.020 - 0.090	H	<0.0050	<0.010	<0.0050	<0.0050
iron			0.079	0.463	0.475	0.297
lead	0.040 - 0.160	H	<0.0025	<0.0050	<0.0025	<0.0025
lithium			0.031	0.025	0.021	0.035
magnesium			403	1160	477	571
manganese			0.042	0.691	0.377	0.400
mercury	0.001		<0.00020	<0.00020	<0.00020	<0.00020
molybdenum	10		<0.030	<0.060	<0.030	<0.030
nickel	0.250 - 1.5	H	<0.050	<0.10	<0.050	<0.050
phosphorus			<0.30	<0.60	<0.30	<0.30
potassium			15.3	27.5	28.2	32.7
selenium	0.01		<0.0050	<0.010	<0.0050	<0.0050
silicon			8.51	6.37	6.51	7.69
silver	0.0005 - 0.015	H	<0.010	<0.020	<0.010	<0.010
sodium			103.0	231.0	113	125.0
strontium			1.49	4.06	2.20	2.84
thallium	0.003		<0.20	<0.40	<0.20	<0.20
tin			<0.030	<0.060	<0.030	<0.030
titanium	1		0.020	<0.020	0.018	0.020
uranium	3		0.203	0.0639	0.00731	0.00886
vanadium			<0.030	<0.060	<0.030	<0.030
zinc	0.075 - 2.4	H	<0.25	<0.50	<0.25	<0.25
Other Inorganics						
bicarbonate (CaCO3)			344	447	288	270
carbonate (CaCO3)			<1.0	<2.0	<2.0	<2.0
hydroxide (CaCO3)			<1.0	<2.0	<2.0	<2.0
total alkalinity (CaCO3)			344	447	288	270
ammonia	1.31 - 18.5	pH	0.342	1.84	1.54	1.80
bromide (free)						
chloride			76	109	90	105
fluoride	2 - 3	H	0.48	<0.40	<0.40	<0.40
nitrate (as N)	400		<0.10	<0.25	<0.10	<0.10
nitrite (as N)	0.2 - 2	Cl	<0.020	<0.050	<0.020	<0.020
total Kjeldahl nitrogen			3.95	4.04	2.54	3.07
sulphate	1000		2140	5840	2520	2900

Notes:

All concentrations in milligrams per litre (mg/L), unless otherwise noted.

Standards from the Yukon Contaminated Sites Regulation (CSR), from the Environment Act (O.I.C. 2002/171) its associated Schedules.

Land Use abbreviations: AW (Aquatic Life) and DW (Drinking Water).

H = standard is Hardness dependent

CL = standard is chloride dependent

pH = standard is pH dependent

V= Standard is valence dependent VI refers to chromium VI and III refers to chromium III

T = standard varies with temperature

MCS = Most Conservative Standard

FDA = field duplicate available

FD = field duplicate

QA/QC = quality assurance/quality control

SCN = sample control number

Italics indicates standard is below detection limit.

Bold= Exceeds CSR Drinking water (DW) standard.

Yellow highlight and box= Exceeds CSR freshwater aquatic life (AW) standards; AW standards assume minimum 1:10 dilution is available.

COC = Chain of Custody

Table E-2
Results of Water Analyses - Hydrocarbons
[YTG Landfill Monitoring, Pelly Crossing, Yukon]

SCN Location QA/QC Date	Aquatic Life CSR-AW (freshwater)	L1209363-4	L1209363-1	L1209363-2	L1209363-3
		PC-SURFACE	PC-MW12-01	PC-MW12-02	PC-MW12-03
	Notes	13-SEP-12	09-SEP-12	10-SEP-12	10-SEP-12
Monoaromatic Hydrocarbons					
benzene	4	<0.00050	<0.00050	<0.00050	<0.00050
ethylbenzene	2	<0.00050	<0.00050	<0.00050	<0.00050
styrene	0.72	<0.00050	<0.00050	<0.00050	<0.00050
toluene	0.390	<0.00050	<0.00050	<0.00050	<0.00050
ortho-xylene		<0.00050	<0.00050	<0.00050	<0.00050
meta- & para-xylene		<0.00050	<0.00050	<0.00050	<0.00050
total xylene		<0.00075	<0.00075	<0.00075	<0.00075
VHw ₆₋₁₀	15	<0.10	<0.10	<0.10	<0.10
VPHw	1.5	<0.10	<0.10	<0.10	<0.10
Polycyclic Aromatic Hydrocarbons					
acenaphthene		<0.000070	<0.000050	<0.000050	<0.000050
acenaphthylene		<0.000050	<0.000050	<0.000050	<0.000050
acridine	0.0005	<0.000050	<0.000050	<0.000050	<0.000050
anthracene	0.001	<0.000050	<0.000050	<0.000050	<0.000050
benzo(a)anthracene	0.001	<0.000050	<0.000050	<0.000050	<0.000050
benzo(a)pyrene	0.0001	<0.000010	<0.000010	<0.000010	<0.000010
benzo(b)fluoranthene		<0.000050	<0.000050	<0.000050	<0.000050
benzo(g,h,i)perylene		<0.000050	<0.000050	<0.000050	<0.000050
benzo(k)fluoranthene		<0.000050	<0.000050	<0.000050	<0.000050
chrysene		<0.000050	<0.000050	<0.000050	<0.000050
dibenzo(a,h)anthracene		<0.000050	<0.000050	<0.000050	<0.000050
fluoranthene	0.002	<0.000050	<0.000050	<0.000050	<0.000050
fluorene	0.12	<0.000050	<0.000050	<0.000050	<0.000050
indeno(1,2,3-c,d)pyrene		<0.000050	<0.000050	<0.000050	<0.000050
naphthalene	0.01	<0.000050	<0.000050	<0.000050	<0.000050
phenanthrene	0.003	<0.000050	<0.000050	<0.000050	<0.000050
pyrene	0.0002	<0.000050	0.000098	<0.000050	<0.000050
quinoline	0.034	<0.000050	<0.000050	<0.000050	<0.000050
Other Hydrocarbons					
EPHw ₁₀₋₁₉	5	0.47	<0.25	<0.25	<0.25
EPHw ₁₉₋₃₂		0.54	<0.25	<0.25	<0.25
LEPHw	0.5	0.47	<0.25	<0.25	<0.25
HEPHw		0.54	<0.25	<0.25	<0.25
Miscellaneous Organics					
methyl tertiary butyl ether (MTBE)		<0.00050	<0.00050	<0.00050	<0.00050

Notes:

All concentrations in milligrams per litre (mg/L), unless otherwise noted.

Standards from the Yukon Contaminated Sites Regulation (CSR), from the Environment Act (O.I.C. 2002/171) its associated Schedules.

Land Use abbreviations: DW (Drinking Water) and AW (Aquatic Life).

FDA = field duplicate available

FD = field duplicate

QA/QC = quality assurance/quality control

SCN = sample control number

COC = Chain of Custody

EPHw₁₀₋₁₉ = extractable petroleum hydrocarbons, carbon range 10-19

LEPHw = light extractable petroleum hydrocarbons

Where water use for the protection of aquatic life applies, the standards for EPHw₁₀₋₁₉ is equivalent to LEPHw, when no LEPHw analysis is undertaken.

VPHw = volatile petroleum hydrocarbons

VHw₆₋₁₀ = volatile hydrocarbons, carbon range 6-10

Where water use for the protection of aquatic life applies, the standards for VHw6-10 equivalent to VPHw, when no VPHw analysis is undertaken.

PAH = polycyclic aromatic hydrocarbon

Italics indicates standard is below detection limit.

Yellow highlight and box= Exceeds CSR freshwater aquatic life (AW) standards; AW standards assume minimum 1:10 dilution is available.



GOLDER ASSOCIATES LTD.
ATTN: Andrea Badger
201B, 170 Titanium Way
Whitehorse YT Y1A 0G1

Date Received: 14-SEP-12
Report Date: 27-SEP-12 10:35 (MT)
Version: FINAL

Client Phone: 867-633-6076

Certificate of Analysis

Lab Work Order #: L1209363
Project P.O. #: NOT SUBMITTED
Job Reference: 11-1436-0073/1200,2200,2400,2700
C of C Numbers:
Legal Site Desc:

Amber Springer
Account Manager

[This report shall not be reproduced except in full without the written authority of the Laboratory.]

ADDRESS: 8081 Lougheed Hwy, Suite 100, Burnaby, BC V5A 1W9 Canada | Phone: +1 604 253 4188 | Fax: +1 604 253 6700
ALS CANADA LTD Part of the ALS Group A Campbell Brothers Limited Company

ALS ENVIRONMENTAL ANALYTICAL REPORT

27-SEP-12 10:35 (MT)

Version: FINAL

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-1 groundwater 09-SEP-12 15:40 PC-MW12-01	L1209363-2 groundwater 10-SEP-12 10:20 PC-MW12-02	L1209363-3 groundwater 10-SEP-12 11:30 PC-MW12-03	L1209363-4 surface water 13-SEP-12 13:30 PC SURFACE	L1209363-5 groundwater 12-SEP-12 10:40 SX-MW12-01
Grouping	Analyte					
WATER						
Physical Tests	Hardness (as CaCO3) (mg/L)	5720	2500	3010	2350	681
	pH (pH)	7.83	7.93	7.87	8.13	7.78
	Total Dissolved Solids (mg/L)	8890	3970	4690	3870	1470
Anions and Nutrients	Alkalinity, Bicarbonate (as CaCO3) (mg/L)	447	288	270	344	107
	Alkalinity, Carbonate (as CaCO3) (mg/L)	<2.0	<2.0	<2.0	<1.0	<2.0
	Alkalinity, Hydroxide (as CaCO3) (mg/L)	<2.0	<2.0	<2.0	<1.0	<2.0
	Alkalinity, Total (as CaCO3) (mg/L)	447	288	270	344	107
	Ammonia, Total (as N) (mg/L)	1.84	1.54	1.80	0.342	0.0122
	Chloride (Cl) (mg/L)	109	90	105	76	431
	Fluoride (F) (mg/L)	<0.40 ^{DLM}	<0.40 ^{DLM}	<0.40 ^{DLM}	0.48 ^{DLA}	<0.20 ^{DLM}
	Nitrate (as N) (mg/L)	<0.25 ^{DLA}	<0.10 ^{DLA}	<0.10 ^{DLA}	<0.10 ^{DLA}	<0.050 ^{DLA}
	Nitrite (as N) (mg/L)	<0.050 ^{DLA}	<0.020 ^{DLA}	<0.020 ^{DLA}	<0.020 ^{DLA}	<0.010 ^{DLA}
	Total Kjeldahl Nitrogen (mg/L)	4.04	2.54	3.07	3.95	0.179
	Sulfate (SO4) (mg/L)	5840	2520	2900	2140	63.0
Organic / Inorganic Carbon	Dissolved Organic Carbon (mg/L)	33.8	17.2	18.1	68.6	3.32
Dissolved Metals	Dissolved Metals Filtration Location	FIELD ^{DLA}	FIELD ^{DLA}	FIELD ^{DLA}	LAB ^{DLA}	FIELD ^{DLA}
	Aluminum (Al)-Dissolved (mg/L)	<0.10 ^{DLA}	<0.050 ^{DLA}	<0.050 ^{DLA}	<0.050 ^{DLA}	<0.050 ^{DLA}
	Antimony (Sb)-Dissolved (mg/L)	<0.0050 ^{DLA}	<0.0025 ^{DLA}	<0.0025 ^{DLA}	<0.0025 ^{DLA}	<0.0025 ^{DLA}
	Arsenic (As)-Dissolved (mg/L)	0.0083 ^{DLA}	0.00855 ^{DLA}	0.00699 ^{DLA}	0.00134 ^{DLA}	0.00060 ^{DLA}
	Barium (Ba)-Dissolved (mg/L)	<0.20 ^{DLA}	<0.10 ^{DLA}	<0.10 ^{DLA}	<0.10 ^{DLA}	<0.10 ^{DLA}
	Beryllium (Be)-Dissolved (mg/L)	<0.010 ^{DLA}	<0.0050 ^{DLA}	<0.0050 ^{DLA}	<0.0050 ^{DLA}	<0.0050 ^{DLA}
	Bismuth (Bi)-Dissolved (mg/L)	<0.40 ^{DLA}	<0.20 ^{DLA}	<0.20 ^{DLA}	<0.20 ^{DLA}	<0.20 ^{DLA}
	Boron (B)-Dissolved (mg/L)	<1.0 ^{DLA}	<0.50 ^{DLA}	<0.50 ^{DLA}	<0.50 ^{DLA}	<0.50 ^{DLA}
	Cadmium (Cd)-Dissolved (mg/L)	<0.0020 ^{DLA}	<0.0010 ^{DLA}	<0.0010 ^{DLA}	<0.0010 ^{DLA}	0.0016 ^{DLA}
	Calcium (Ca)-Dissolved (mg/L)	372 ^{DLA}	213 ^{DLA}	263 ^{DLA}	278 ^{DLA}	218 ^{DLA}
	Chromium (Cr)-Dissolved (mg/L)	<0.020 ^{DLA}	<0.010 ^{DLA}	<0.010 ^{DLA}	<0.010 ^{DLA}	<0.010 ^{DLA}
	Cobalt (Co)-Dissolved (mg/L)	<0.020 ^{DLA}	<0.010 ^{DLA}	<0.010 ^{DLA}	<0.010 ^{DLA}	0.025 ^{DLA}
	Copper (Cu)-Dissolved (mg/L)	<0.010 ^{DLA}	<0.0050 ^{DLA}	<0.0050 ^{DLA}	<0.0050 ^{DLA}	<0.0050 ^{DLA}
	Iron (Fe)-Dissolved (mg/L)	0.463 ^{DLA}	0.475 ^{DLA}	0.297 ^{DLA}	0.079 ^{DLA}	<0.030 ^{DLA}
	Lead (Pb)-Dissolved (mg/L)	<0.0050 ^{DLA}	<0.0025 ^{DLA}	<0.0025 ^{DLA}	<0.0025 ^{DLA}	<0.0025 ^{DLA}
	Lithium (Li)-Dissolved (mg/L)	0.025	0.021	0.035	0.031	0.021
	Magnesium (Mg)-Dissolved (mg/L)	1160	477	571	403	32.9
	Manganese (Mn)-Dissolved (mg/L)	0.691	0.377	0.400	0.042	1.28
	Mercury (Hg)-Dissolved (mg/L)	<0.00020 ^{DLA}	<0.00020 ^{DLA}	<0.00020 ^{DLA}	<0.00020 ^{DLA}	<0.00020 ^{DLA}
	Molybdenum (Mo)-Dissolved (mg/L)	<0.060 ^{DLA}	<0.030 ^{DLA}	<0.030 ^{DLA}	<0.030 ^{DLA}	<0.030 ^{DLA}
	Nickel (Ni)-Dissolved (mg/L)	<0.10 ^{DLA}	<0.050 ^{DLA}	<0.050 ^{DLA}	<0.050 ^{DLA}	0.106 ^{DLA}

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-6 groundwater 10-SEP-12 16:30 SX-MW12-02	L1209363-7 groundwater 10-SEP-12 17:45 SX-MW12-03	L1209363-8 groundwater 10-SEP-12 16:30 SX-MW12-04	L1209363-9 surface water 12-SEP-12 13:20 SX SURFACE	L1209363-10 groundwater 11-SEP-12 10:45 MA-MW12-01
Grouping	Analyte					
WATER						
Physical Tests	Hardness (as CaCO ₃) (mg/L)	3120	189	3040	127	229
	pH (pH)	7.70	8.05	7.78	7.90	8.07
	Total Dissolved Solids (mg/L)	6260	227	6390	160	364
Anions and Nutrients	Alkalinity, Bicarbonate (as CaCO ₃) (mg/L)	247	198	246	120	195
	Alkalinity, Carbonate (as CaCO ₃) (mg/L)	<2.0	<2.0	<2.0	<2.0	<2.0
	Alkalinity, Hydroxide (as CaCO ₃) (mg/L)	<2.0	<2.0	<2.0	<2.0	<2.0
	Alkalinity, Total (as CaCO ₃) (mg/L)	247	198	246	120	195
	Ammonia, Total (as N) (mg/L)	<0.0050	<0.0050	<0.0050	0.0110	0.0306
	Chloride (Cl) (mg/L)	2010	0.97	1970	<0.50	<0.50
	Fluoride (F) (mg/L)	<0.40 ^{DLM}	0.377	<0.40 ^{DLM}	0.193 ^{DLA}	0.077
	Nitrate (as N) (mg/L)	3.47 ^{DLA}	0.167	2.38	<0.10 ^{DLA}	0.0126
	Nitrite (as N) (mg/L)	<0.050 ^{TKNI}	<0.0010	<0.0010 ^{TKNI}	<0.020	<0.0010
	Total Kjeldahl Nitrogen (mg/L)	0.156	0.079	0.137	0.169	0.77
	Sulfate (SO ₄) (mg/L)	83	12.0	82	18.6	104
Organic / Inorganic Carbon	Dissolved Organic Carbon (mg/L)	4.12	2.93	3.85	4.26	1.24
Dissolved Metals	Dissolved Metals Filtration Location	FIELD ^{DLA}	FIELD	FIELD ^{DLA}	LAB	FIELD
	Aluminum (Al)-Dissolved (mg/L)	<0.10 ^{DLA}	<0.010	<0.10 ^{DLA}	<0.010	<0.010
	Antimony (Sb)-Dissolved (mg/L)	<0.0050 ^{DLA}	<0.00050	<0.0050 ^{DLA}	<0.00050	<0.00050
	Arsenic (As)-Dissolved (mg/L)	<0.0010 ^{DLA}	0.00029	<0.0010 ^{DLA}	0.00086	0.00377
	Barium (Ba)-Dissolved (mg/L)	<0.20 ^{DLA}	0.021	<0.20 ^{DLA}	0.094	0.050
	Beryllium (Be)-Dissolved (mg/L)	<0.010 ^{DLA}	<0.0050	<0.010 ^{DLA}	<0.0050	<0.0050
	Bismuth (Bi)-Dissolved (mg/L)	<0.40 ^{DLA}	<0.20	<0.40 ^{DLA}	<0.20	<0.20
	Boron (B)-Dissolved (mg/L)	<1.0 ^{DLA}	<0.10	<1.0 ^{DLA}	<0.10	<0.10
	Cadmium (Cd)-Dissolved (mg/L)	<0.0020 ^{DLA}	<0.00020	<0.0020 ^{DLA}	<0.00020	<0.00020
	Calcium (Ca)-Dissolved (mg/L)	1200 ^{DLA}	61.2	1170 ^{DLA}	39.6	67.3
	Chromium (Cr)-Dissolved (mg/L)	<0.020 ^{DLA}	<0.0020	<0.020 ^{DLA}	<0.0020	<0.0020
	Cobalt (Co)-Dissolved (mg/L)	<0.020 ^{DLA}	<0.010	<0.020 ^{DLA}	<0.010	<0.010
	Copper (Cu)-Dissolved (mg/L)	<0.010 ^{DLA}	<0.0010	<0.010 ^{DLA}	<0.0010	<0.0010
	Iron (Fe)-Dissolved (mg/L)	<0.060 ^{DLA}	<0.030	<0.060 ^{DLA}	0.194	0.597
	Lead (Pb)-Dissolved (mg/L)	<0.0050 ^{DLA}	<0.00050	<0.0050 ^{DLA}	<0.00050	<0.00050
	Lithium (Li)-Dissolved (mg/L)	0.032	0.012	0.032	<0.010	<0.010
	Magnesium (Mg)-Dissolved (mg/L)	29.5 ^{DLA}	8.68	29.5 ^{DLA}	6.95	14.8
	Manganese (Mn)-Dissolved (mg/L)	<0.020 ^{DLA}	0.113	<0.020 ^{DLA}	0.129	0.482
	Mercury (Hg)-Dissolved (mg/L)	<0.00020 ^{DLA}	<0.00020	<0.00020 ^{DLA}	<0.00020	<0.00020
	Molybdenum (Mo)-Dissolved (mg/L)	<0.060 ^{DLA}	<0.030	<0.060 ^{DLA}	<0.030	<0.030
	Nickel (Ni)-Dissolved (mg/L)	<0.10 ^{DLA}	<0.050	<0.10 ^{DLA}	<0.050	<0.050

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

27-SEP-12 10:35 (MT)

Version: FINAL

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-11 groundwater 11-SEP-12 12:30 MA-MW12-02	L1209363-12 groundwater 11-SEP-12 14:15 MA-MW12-03	L1209363-13 groundwater 11-SEP-12 15:15 MA-MW12-04	L1209363-14 surface water 12-SEP-12 17:30 MA SURFACE	L1209363-15 groundwater 13-SEP-12 09:25 KE-MW12-01
Grouping	Analyte					
WATER						
Physical Tests	Hardness (as CaCO3) (mg/L)	419	191	252	108	719
	pH (pH)	7.94	8.02	8.04	8.16	7.69
	Total Dissolved Solids (mg/L)	4270	263	325	145	968
Anions and Nutrients	Alkalinity, Bicarbonate (as CaCO3) (mg/L)	287	154	180	84.2	373
	Alkalinity, Carbonate (as CaCO3) (mg/L)	<1.0	<1.0	<2.0	<2.0	<2.0
	Alkalinity, Hydroxide (as CaCO3) (mg/L)	<1.0	<1.0	<2.0	<2.0	<2.0
	Alkalinity, Total (as CaCO3) (mg/L)	287	154	180	84.2	373
	Ammonia, Total (as N) (mg/L)	0.420	0.322	0.0090	<0.0050	0.0877
	Chloride (Cl) (mg/L)	5.1	<0.50	<0.50	<0.50	<5.0 ^{DLM}
	Fluoride (F) (mg/L)	0.23	0.074	0.057	0.061	<0.20 ^{DLM}
	Nitrate (as N) (mg/L)	0.161	0.0135	0.0137	0.0553	<0.050 ^{DLA}
	Nitrite (as N) (mg/L)	0.020	<0.0010	<0.0010	<0.0010	<0.010 ^{DLA}
	Total Kjeldahl Nitrogen (mg/L)	8.19	7.36	0.27	0.122	0.572
	Sulfate (SO4) (mg/L)	633	54.7	83.7	29.9	408
Organic / Inorganic Carbon	Dissolved Organic Carbon (mg/L)	4.09	0.92	0.74	2.77	5.57
Dissolved Metals	Dissolved Metals Filtration Location	LAB	LAB	FIELD	FIELD	FIELD
	Aluminum (Al)-Dissolved (mg/L)	0.194	0.016	<0.010	0.026	0.058
	Antimony (Sb)-Dissolved (mg/L)	0.00588	0.00847	<0.00050	<0.00050	0.0019
	Arsenic (As)-Dissolved (mg/L)	0.00236	0.00245	0.00306	0.00225	0.00058 ^{DLA}
	Barium (Ba)-Dissolved (mg/L)	0.041	0.093	0.061	0.056	<0.040
	Beryllium (Be)-Dissolved (mg/L)	<0.0050	<0.0050	<0.0050	<0.0050	<0.0050
	Bismuth (Bi)-Dissolved (mg/L)	<0.20	<0.20	<0.20	<0.20	<0.20 ^{DLA}
	Boron (B)-Dissolved (mg/L)	<0.10	<0.10	<0.10	<0.10	<0.20 ^{DLA}
	Cadmium (Cd)-Dissolved (mg/L)	<0.00020	<0.00020	<0.00020	<0.00020	0.00142
	Calcium (Ca)-Dissolved (mg/L)	124	59.2	75.1	32.4	209 ^{DLA}
	Chromium (Cr)-Dissolved (mg/L)	<0.0020	<0.0020	<0.0020	<0.0020	<0.0040
	Cobalt (Co)-Dissolved (mg/L)	<0.010	<0.010	<0.010	<0.010	0.076 ^{DLA}
	Copper (Cu)-Dissolved (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0020 ^{DLA}
	Iron (Fe)-Dissolved (mg/L)	0.221	<0.030	0.089	<0.030	0.183 ^{DLA}
	Lead (Pb)-Dissolved (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.0010 ^{DLA}
	Lithium (Li)-Dissolved (mg/L)	0.023	<0.010	<0.010	<0.010	0.016
	Magnesium (Mg)-Dissolved (mg/L)	26.5	10.4	15.8	6.68	47.9
	Manganese (Mn)-Dissolved (mg/L)	0.859	0.271	0.319	0.0102	2.86
	Mercury (Hg)-Dissolved (mg/L)	<0.00020	<0.00020	<0.00020	<0.00020	<0.00020
	Molybdenum (Mo)-Dissolved (mg/L)	<0.030	<0.030	<0.030	<0.030	<0.030
	Nickel (Ni)-Dissolved (mg/L)	<0.050	<0.050	<0.050	<0.050	0.141

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-16 groundwater 13-SEP-12 09:55 KE-MW12-03	L1209363-17 surface water 11-SEP-12 19:15 KE SURFACE		
Grouping	Analyte				
WATER					
Physical Tests	Hardness (as CaCO3) (mg/L)	1790	95.5		
	pH (pH)	7.55	7.86		
	Total Dissolved Solids (mg/L)	2710	133		
Anions and Nutrients	Alkalinity, Bicarbonate (as CaCO3) (mg/L)	408	41.1		
	Alkalinity, Carbonate (as CaCO3) (mg/L)	<2.0	<2.0		
	Alkalinity, Hydroxide (as CaCO3) (mg/L)	<2.0	<2.0		
	Alkalinity, Total (as CaCO3) (mg/L)	408	41.1		
	Ammonia, Total (as N) (mg/L)	0.0442	0.0085		
	Chloride (Cl) (mg/L)	24	0.76		
	Fluoride (F) (mg/L)	<0.40 ^{DLM}	0.058		
	Nitrate (as N) (mg/L)	<0.10 ^{DLA}	0.127		
	Nitrite (as N) (mg/L)	0.062	<0.0010		
	Total Kjeldahl Nitrogen (mg/L)	0.520	0.186		
	Sulfate (SO4) (mg/L)	1540	52.9		
Organic / Inorganic Carbon	Dissolved Organic Carbon (mg/L)	5.04	1.33		
Dissolved Metals	Dissolved Metals Filtration Location	FIELD	FIELD		
	Aluminum (Al)-Dissolved (mg/L)	<0.050 ^{DLA}	0.042		
	Antimony (Sb)-Dissolved (mg/L)	<0.0025 ^{DLA}	<0.00050		
	Arsenic (As)-Dissolved (mg/L)	0.00081	0.00090		
	Barium (Ba)-Dissolved (mg/L)	<0.10 ^{DLA}	0.052		
	Beryllium (Be)-Dissolved (mg/L)	<0.0050	<0.0050		
	Bismuth (Bi)-Dissolved (mg/L)	<0.20	<0.20		
	Boron (B)-Dissolved (mg/L)	<0.50 ^{DLA}	<0.10		
	Cadmium (Cd)-Dissolved (mg/L)	0.0020	<0.00020		
	Calcium (Ca)-Dissolved (mg/L)	571	30.1		
	Chromium (Cr)-Dissolved (mg/L)	<0.010 ^{DLA}	<0.0020		
	Cobalt (Co)-Dissolved (mg/L)	0.092	<0.010		
	Copper (Cu)-Dissolved (mg/L)	<0.0050 ^{DLA}	<0.0010		
	Iron (Fe)-Dissolved (mg/L)	0.475	0.036		
	Lead (Pb)-Dissolved (mg/L)	<0.0025 ^{DLA}	<0.00050		
	Lithium (Li)-Dissolved (mg/L)	0.071	<0.010		
	Magnesium (Mg)-Dissolved (mg/L)	88.8	4.95		
	Manganese (Mn)-Dissolved (mg/L)	4.20	0.0047		
	Mercury (Hg)-Dissolved (mg/L)	<0.00020	<0.00020		
	Molybdenum (Mo)-Dissolved (mg/L)	<0.030	<0.030		
	Nickel (Ni)-Dissolved (mg/L)	0.277	<0.050		

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-1 groundwater 09-SEP-12 15:40 PC-MW12-01	L1209363-2 groundwater 10-SEP-12 10:20 PC-MW12-02	L1209363-3 groundwater 10-SEP-12 11:30 PC-MW12-03	L1209363-4 surface water 13-SEP-12 13:30 PC SURFACE	L1209363-5 groundwater 12-SEP-12 10:40 SX-MW12-01
Grouping	Analyte					
WATER						
Dissolved Metals	Phosphorus (P)-Dissolved (mg/L)	<0.60 ^{DLA}	<0.30	<0.30	<0.30	<0.30
	Potassium (K)-Dissolved (mg/L)	27.5	28.2	32.7	15.3	2.76
	Selenium (Se)-Dissolved (mg/L)	<0.010 ^{DLA}	<0.0050 ^{DLA}	<0.0050 ^{DLA}	<0.0050 ^{DLA}	<0.0050 ^{DLA}
	Silicon (Si)-Dissolved (mg/L)	6.37	6.51	7.69	8.51	4.83
	Silver (Ag)-Dissolved (mg/L)	<0.020 ^{DLA}	<0.010	<0.010	<0.010	<0.010
	Sodium (Na)-Dissolved (mg/L)	231	113	125	103	21.8
	Strontium (Sr)-Dissolved (mg/L)	4.06	2.20	2.84	1.49	0.837
	Thallium (Tl)-Dissolved (mg/L)	<0.40 ^{DLA}	<0.20	<0.20	<0.20	<0.20
	Tin (Sn)-Dissolved (mg/L)	<0.060 ^{DLA}	<0.030	<0.030	<0.030	<0.030
	Titanium (Ti)-Dissolved (mg/L)	<0.020 ^{DLA}	0.018	0.020	0.020	0.018
	Uranium (U)-Dissolved (mg/L)	0.0639	0.00731	0.00886	0.203	0.0267
	Vanadium (V)-Dissolved (mg/L)	<0.060 ^{DLA}	<0.030	<0.030	<0.030	<0.030
	Zinc (Zn)-Dissolved (mg/L)	<0.50 ^{DLA}	<0.25 ^{DLA}	<0.25 ^{DLA}	<0.25 ^{DLA}	<0.25 ^{DLA}
Aggregate Organics	COD (mg/L)	123	56	81	218	52
Volatile Organic Compounds	Benzene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Bromodichloromethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Bromoform (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Carbon Tetrachloride (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Chlorobenzene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Dibromochloromethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Chloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Chloroform (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Chloromethane (mg/L)	<0.0050	<0.0050	<0.0050	<0.0050	<0.0050
	1,2-Dichlorobenzene (mg/L)	<0.00070	<0.00070	<0.00070	<0.00070	<0.00070
	1,3-Dichlorobenzene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,4-Dichlorobenzene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1-Dichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,2-Dichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1-Dichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	cis-1,2-Dichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	trans-1,2-Dichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,3-Dichloropropene (cis & trans) (mg/L)	<0.0014	<0.0014	<0.0014	<0.0014	<0.0014
	Dichloromethane (mg/L)	<0.0050	<0.0050	<0.0050	<0.0050	<0.0050
	1,2-Dichloropropane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	cis-1,3-Dichloropropylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	trans-1,3-Dichloropropylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-6 groundwater 10-SEP-12 16:30 SX-MW12-02	L1209363-7 groundwater 10-SEP-12 17:45 SX-MW12-03	L1209363-8 groundwater 10-SEP-12 16:30 SX-MW12-04	L1209363-9 surface water 12-SEP-12 13:20 SX SURFACE	L1209363-10 groundwater 11-SEP-12 10:45 MA-MW12-01
Grouping	Analyte					
WATER						
Dissolved Metals	Phosphorus (P)-Dissolved (mg/L)	<0.60 ^{DLA}	<0.30	<0.60 ^{DLA}	<0.30	<0.30
	Potassium (K)-Dissolved (mg/L)	1.2	0.49	1.3	1.09	1.77
	Selenium (Se)-Dissolved (mg/L)	<0.010 ^{DLA}	<0.0010	<0.010 ^{DLA}	<0.0010	<0.0010
	Silicon (Si)-Dissolved (mg/L)	4.80	4.93	4.84	4.08	2.40
	Silver (Ag)-Dissolved (mg/L)	<0.020 ^{DLA}	<0.010	<0.020 ^{DLA}	<0.010	<0.010
	Sodium (Na)-Dissolved (mg/L)	32.3	6.6	32.8	2.4	<2.0
	Strontium (Sr)-Dissolved (mg/L)	2.10	0.215	2.17	0.206	0.396
	Thallium (Tl)-Dissolved (mg/L)	<0.40 ^{DLA}	<0.20	<0.40 ^{DLA}	<0.20	<0.20
	Tin (Sn)-Dissolved (mg/L)	<0.060 ^{DLA}	<0.030	<0.060 ^{DLA}	<0.030	<0.030
	Titanium (Ti)-Dissolved (mg/L)	<0.020 ^{DLA}	<0.010	<0.020 ^{DLA}	<0.010	0.012
	Uranium (U)-Dissolved (mg/L)	0.204	0.0180	0.196	0.00086	0.00271
	Vanadium (V)-Dissolved (mg/L)	<0.060 ^{DLA}	<0.030	<0.060 ^{DLA}	<0.030	<0.030
	Zinc (Zn)-Dissolved (mg/L)	<0.50 ^{DLA}	<0.050	<0.50 ^{DLA}	<0.050	<0.050
Aggregate Organics	COD (mg/L)	81	<20	88	<20	53
Volatile Organic Compounds	Benzene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Bromodichloromethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Bromoform (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Carbon Tetrachloride (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Chlorobenzene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Dibromochloromethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Chloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Chloroform (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Chloromethane (mg/L)	<0.0050	<0.0050	<0.0050	<0.0050	<0.0050
	1,2-Dichlorobenzene (mg/L)	<0.00070	<0.00070	<0.00070	<0.00070	<0.00070
	1,3-Dichlorobenzene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,4-Dichlorobenzene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1-Dichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,2-Dichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1-Dichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	cis-1,2-Dichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	trans-1,2-Dichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,3-Dichloropropene (cis & trans) (mg/L)	<0.0014	<0.0014	<0.0014	<0.0014	<0.0014
	Dichloromethane (mg/L)	<0.0050	<0.0050	<0.0050	<0.0050	<0.0050
	1,2-Dichloropropane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	cis-1,3-Dichloropropylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	trans-1,3-Dichloropropylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-11 groundwater 11-SEP-12 12:30 MA-MW12-02	L1209363-12 groundwater 11-SEP-12 14:15 MA-MW12-03	L1209363-13 groundwater 11-SEP-12 15:15 MA-MW12-04	L1209363-14 surface water 12-SEP-12 17:30 MA SURFACE	L1209363-15 groundwater 13-SEP-12 09:25 KE-MW12-01
Grouping	Analyte					
WATER						
Dissolved Metals	Phosphorus (P)-Dissolved (mg/L)	<0.30	<0.30	<0.30	<0.30	<0.30
	Potassium (K)-Dissolved (mg/L)	4.10	2.50	1.76	0.50	1.52
	Selenium (Se)-Dissolved (mg/L)	0.0012	<0.0010	<0.0010	<0.0010	<0.0020 ^{DLA}
	Silicon (Si)-Dissolved (mg/L)	4.69	2.61	2.91	2.08	5.77
	Silver (Ag)-Dissolved (mg/L)	<0.010	<0.010	<0.010	<0.010	<0.010
	Sodium (Na)-Dissolved (mg/L)	166	<2.0	<2.0	<2.0	5.4
	Strontium (Sr)-Dissolved (mg/L)	1.02	0.276	0.325	0.163	0.510
	Thallium (Tl)-Dissolved (mg/L)	<0.20	<0.20	<0.20	<0.20	<0.20
	Tin (Sn)-Dissolved (mg/L)	<0.030	<0.030	<0.030	<0.030	<0.030
	Titanium (Ti)-Dissolved (mg/L)	0.022	<0.010	0.010	<0.010	0.029
	Uranium (U)-Dissolved (mg/L)	0.0542	0.0190	0.00454	0.00071	0.00232
	Vanadium (V)-Dissolved (mg/L)	<0.030	<0.030	<0.030	<0.030	<0.030 ^{DLA}
	Zinc (Zn)-Dissolved (mg/L)	<0.050	<0.050	<0.050	<0.050	<0.10 ^{DLA}
Aggregate Organics	COD (mg/L)	77	146	20	<20	47
Volatile Organic Compounds	Benzene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Bromodichloromethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Bromoform (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Carbon Tetrachloride (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Chlorobenzene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Dibromochloromethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Chloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Chloroform (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Chloromethane (mg/L)	<0.0050	<0.0050	<0.0050	<0.0050	<0.0050
	1,2-Dichlorobenzene (mg/L)	<0.00070	<0.00070	<0.00070	<0.00070	<0.00070
	1,3-Dichlorobenzene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,4-Dichlorobenzene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1-Dichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,2-Dichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1-Dichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	cis-1,2-Dichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	trans-1,2-Dichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,3-Dichloropropene (cis & trans) (mg/L)	<0.0014	<0.0014	<0.0014	<0.0014	<0.0014
	Dichloromethane (mg/L)	<0.0050	<0.0050	<0.0050	<0.0050	<0.0050
	1,2-Dichloropropane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	cis-1,3-Dichloropropylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	trans-1,3-Dichloropropylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

		Sample ID Description Sampled Date Sampled Time Client ID	L1209363-16 groundwater 13-SEP-12 09:55 KE-MW12-03	L1209363-17 surface water 11-SEP-12 19:15 KE SURFACE			
Grouping	Analyte						
WATER							
Dissolved Metals	Phosphorus (P)-Dissolved (mg/L)	<0.30	<0.30				
	Potassium (K)-Dissolved (mg/L)	17.2	0.18				
	Selenium (Se)-Dissolved (mg/L)	0.0336	<0.0010				
	Silicon (Si)-Dissolved (mg/L)	9.32	2.92				
	Silver (Ag)-Dissolved (mg/L)	<0.010	<0.010				
	Sodium (Na)-Dissolved (mg/L)	26.9	<2.0				
	Strontium (Sr)-Dissolved (mg/L)	1.69	0.0880				
	Thallium (Tl)-Dissolved (mg/L)	<0.20	<0.20				
	Tin (Sn)-Dissolved (mg/L)	<0.030	<0.030				
	Titanium (Ti)-Dissolved (mg/L)	0.056	<0.010				
	Uranium (U)-Dissolved (mg/L)	0.0412	0.00022				
	Vanadium (V)-Dissolved (mg/L)	<0.030	<0.030				
	Zinc (Zn)-Dissolved (mg/L)	<0.25 ^{DLA}	<0.050				
Aggregate Organics	COD (mg/L)	42	<20				
Volatile Organic Compounds	Benzene (mg/L)	<0.00050	<0.00050				
	Bromodichloromethane (mg/L)	<0.0010	<0.0010				
	Bromoform (mg/L)	<0.0010	<0.0010				
	Carbon Tetrachloride (mg/L)	<0.00050	<0.00050				
	Chlorobenzene (mg/L)	<0.0010	<0.0010				
	Dibromochloromethane (mg/L)	<0.0010	<0.0010				
	Chloroethane (mg/L)	<0.0010	<0.0010				
	Chloroform (mg/L)	<0.0010	<0.0010				
	Chloromethane (mg/L)	<0.0050	<0.0050				
	1,2-Dichlorobenzene (mg/L)	<0.00070	<0.00070				
	1,3-Dichlorobenzene (mg/L)	<0.0010	<0.0010				
	1,4-Dichlorobenzene (mg/L)	<0.0010	<0.0010				
	1,1-Dichloroethane (mg/L)	<0.0010	<0.0010				
	1,2-Dichloroethane (mg/L)	<0.0010	<0.0010				
	1,1-Dichloroethylene (mg/L)	<0.0010	<0.0010				
	cis-1,2-Dichloroethylene (mg/L)	<0.0010	<0.0010				
	trans-1,2-Dichloroethylene (mg/L)	<0.0010	<0.0010				
	1,3-Dichloropropene (cis & trans) (mg/L)	<0.0014	<0.0014				
	Dichloromethane (mg/L)	<0.0050	<0.0050				
	1,2-Dichloropropane (mg/L)	<0.0010	<0.0010				
	cis-1,3-Dichloropropylene (mg/L)	<0.0010	<0.0010				
	trans-1,3-Dichloropropylene (mg/L)	<0.0010	<0.0010				

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

		Sample ID Description Sampled Date Sampled Time Client ID	L1209363-1 groundwater 09-SEP-12 15:40 PC-MW12-01	L1209363-2 groundwater 10-SEP-12 10:20 PC-MW12-02	L1209363-3 groundwater 10-SEP-12 11:30 PC-MW12-03	L1209363-4 surface water 13-SEP-12 13:30 PC SURFACE	L1209363-5 groundwater 12-SEP-12 10:40 SX-MW12-01
Grouping	Analyte						
WATER							
Volatile Organic Compounds	Ethylbenzene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050	
	Methyl t-butyl ether (MTBE) (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050	
	Styrene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050	
	1,1,1,2-Tetrachloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010	
	1,1,2,2-Tetrachloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010	
	Tetrachloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010	
	Toluene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050	
	1,1,1-Trichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010	
	1,1,2-Trichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010	
	Trichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010	
	Trichlorofluoromethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010	
	Vinyl Chloride (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010	
	ortho-Xylene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050	
	meta- & para-Xylene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050	
	Xylenes (mg/L)	<0.00075	<0.00075	<0.00075	<0.00075	<0.00075	
	Surrogate: 4-Bromofluorobenzene (SS) (%)	77.8	79.3	80.7	79.6	79.1	
	Surrogate: 1,4-Difluorobenzene (SS) (%)	83.2	83.0	82.5	83.1	82.9	
Hydrocarbons	EPH10-19 (mg/L)	<0.25	<0.25	<0.25	0.47	<0.25	
	EPH19-32 (mg/L)	<0.25	<0.25	<0.25	0.54	<0.25	
	LEPH (mg/L)	<0.25	<0.25	<0.25	0.47	<0.25	
	HEPH (mg/L)	<0.25	<0.25	<0.25	0.54	<0.25	
	Volatile Hydrocarbons (VH6-10) (mg/L)	<0.10	<0.10	<0.10	<0.10	<0.10	
	VPH (C6-C10) (mg/L)	<0.10	<0.10	<0.10	<0.10	<0.10	
	Surrogate: 3,4-Dichlorotoluene (SS) (%)	69.0	80.1	76.0	81.9	85.7	
Polycyclic Aromatic Hydrocarbons	Acenaphthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000070	<0.000050	
	Acenaphthylene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Acridine (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Anthracene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Benz(a)anthracene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Benzo(a)pyrene (mg/L)	<0.000010	<0.000010	<0.000010	<0.000010	<0.000010	
	Benzo(b)fluoranthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Benzo(g,h,i)perylene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Benzo(k)fluoranthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Chrysene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Dibenz(a,h)anthracene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-6 groundwater 10-SEP-12 16:30 SX-MW12-02	L1209363-7 groundwater 10-SEP-12 17:45 SX-MW12-03	L1209363-8 groundwater 10-SEP-12 16:30 SX-MW12-04	L1209363-9 surface water 12-SEP-12 13:20 SX SURFACE	L1209363-10 groundwater 11-SEP-12 10:45 MA-MW12-01
Grouping	Analyte					
WATER						
Volatile Organic Compounds	Ethylbenzene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Methyl t-butyl ether (MTBE) (mg/L)	0.00148	<0.00050	0.00148	<0.00050	<0.00050
	Styrene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	1,1,1,2-Tetrachloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1,2,2-Tetrachloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Tetrachloroethylene (mg/L)	0.0011	<0.0010	0.0010	<0.0010	<0.0010
	Toluene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	1,1,1-Trichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1,2-Trichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Trichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Trichlorofluoromethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Vinyl Chloride (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	ortho-Xylene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	meta- & para-Xylene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Xylenes (mg/L)	<0.00075	<0.00075	<0.00075	<0.00075	<0.00075
	Surrogate: 4-Bromofluorobenzene (SS) (%)	77.1	77.8	78.2	76.2	78.6
	Surrogate: 1,4-Difluorobenzene (SS) (%)	82.9	83.0	83.3	83.1	83.5
Hydrocarbons	EPH10-19 (mg/L)	<0.25	<0.25	<0.25	<0.25	<0.25
	EPH19-32 (mg/L)	<0.25	<0.25	<0.25	<0.25	0.51
	LEPH (mg/L)	<0.25	<0.25	<0.25	<0.25	<0.25
	HEPH (mg/L)	<0.25	<0.25	<0.25	<0.25	0.51
	Volatile Hydrocarbons (VH6-10) (mg/L)	<0.10	<0.10	<0.10	<0.10	<0.10
	VPH (C6-C10) (mg/L)	<0.10	<0.10	<0.10	<0.10	<0.10
	Surrogate: 3,4-Dichlorotoluene (SS) (%)	78.8	77.7	77.7	70.5	76.5
Polycyclic Aromatic Hydrocarbons	Acenaphthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Acenaphthylene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Acridine (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Anthracene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Benz(a)anthracene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Benzo(a)pyrene (mg/L)	<0.000010	<0.000010	<0.000010	<0.000010	<0.000010
	Benzo(b)fluoranthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Benzo(g,h,i)perylene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Benzo(k)fluoranthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Chrysene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Dibenz(a,h)anthracene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-11 groundwater 11-SEP-12 12:30 MA-MW12-02	L1209363-12 groundwater 11-SEP-12 14:15 MA-MW12-03	L1209363-13 groundwater 11-SEP-12 15:15 MA-MW12-04	L1209363-14 surface water 12-SEP-12 17:30 MA SURFACE	L1209363-15 groundwater 13-SEP-12 09:25 KE-MW12-01
Grouping	Analyte					
WATER						
Volatile Organic Compounds	Ethylbenzene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Methyl t-butyl ether (MTBE) (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Styrene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	1,1,1,2-Tetrachloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1,2,2-Tetrachloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Tetrachloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Toluene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	1,1,1-Trichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	1,1,2-Trichloroethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Trichloroethylene (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Trichlorofluoromethane (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	Vinyl Chloride (mg/L)	<0.0010	<0.0010	<0.0010	<0.0010	<0.0010
	ortho-Xylene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	meta- & para-Xylene (mg/L)	<0.00050	<0.00050	<0.00050	<0.00050	<0.00050
	Xylenes (mg/L)	<0.00075	<0.00075	<0.00075	<0.00075	<0.00075
	Surrogate: 4-Bromofluorobenzene (SS) (%)	78.2	79.6	79.7	78.1	78.8
	Surrogate: 1,4-Difluorobenzene (SS) (%)	83.0	83.2	83.1	83.1	83.6
Hydrocarbons	EPH10-19 (mg/L)	<0.25	<0.25	<0.25	<0.25	<0.25
	EPH19-32 (mg/L)	<0.25	0.78	0.50	<0.25	0.54
	LEPH (mg/L)	<0.25	<0.25	<0.25	<0.25	<0.25
	HEPH (mg/L)	<0.25	0.78	0.50	<0.25	0.54
	Volatile Hydrocarbons (VH6-10) (mg/L)	<0.10	<0.10	<0.10	<0.10	<0.10
	VPH (C6-C10) (mg/L)	<0.10	<0.10	<0.10	<0.10	<0.10
	Surrogate: 3,4-Dichlorotoluene (SS) (%)	71.3	83.0	75.8	78.8	75.4
Polycyclic Aromatic Hydrocarbons	Acenaphthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Acenaphthylene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Acridine (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Anthracene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Benz(a)anthracene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Benzo(a)pyrene (mg/L)	<0.000010	<0.000010	<0.000010	<0.000010	<0.000010
	Benzo(b)fluoranthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Benzo(g,h,i)perylene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Benzo(k)fluoranthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Chrysene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Dibenz(a,h)anthracene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

		Sample ID Description Sampled Date Sampled Time Client ID	L1209363-16 groundwater 13-SEP-12 09:55 KE-MW12-03	L1209363-17 surface water 11-SEP-12 19:15 KE SURFACE		
Grouping	Analyte					
WATER						
Volatile Organic Compounds	Ethylbenzene (mg/L)	<0.00050	<0.00050			
	Methyl t-butyl ether (MTBE) (mg/L)	<0.00050	<0.00050			
	Styrene (mg/L)	<0.00050	<0.00050			
	1,1,1,2-Tetrachloroethane (mg/L)	<0.0010	<0.0010			
	1,1,2,2-Tetrachloroethane (mg/L)	<0.0010	<0.0010			
	Tetrachloroethylene (mg/L)	<0.0010	<0.0010			
	Toluene (mg/L)	0.00159	<0.00050			
	1,1,1-Trichloroethane (mg/L)	<0.0010	<0.0010			
	1,1,2-Trichloroethane (mg/L)	<0.0010	<0.0010			
	Trichloroethylene (mg/L)	<0.0010	<0.0010			
	Trichlorofluoromethane (mg/L)	<0.0010	<0.0010			
	Vinyl Chloride (mg/L)	<0.0010	<0.0010			
	ortho-Xylene (mg/L)	<0.00050	<0.00050			
	meta- & para-Xylene (mg/L)	0.00063	<0.00050			
	Xylenes (mg/L)	<0.00075	<0.00075			
	Surrogate: 4-Bromofluorobenzene (SS) (%)	78.3	79.8			
	Surrogate: 1,4-Difluorobenzene (SS) (%)	81.9	82.8			
Hydrocarbons	EPH10-19 (mg/L)	<0.25	<0.25			
	EPH19-32 (mg/L)	<0.25	<0.25			
	LEPH (mg/L)	<0.25	<0.25			
	HEPH (mg/L)	<0.25	<0.25			
	Volatile Hydrocarbons (VH6-10) (mg/L)	<0.10	<0.10			
	VPH (C6-C10) (mg/L)	<0.10	<0.10			
	Surrogate: 3,4-Dichlorotoluene (SS) (%)	73.8	81.8			
Polycyclic Aromatic Hydrocarbons	Acenaphthene (mg/L)	<0.000050	<0.000050			
	Acenaphthylene (mg/L)	<0.000050	<0.000050			
	Acridine (mg/L)	<0.000050	<0.000050			
	Anthracene (mg/L)	<0.000050	<0.000050			
	Benz(a)anthracene (mg/L)	<0.000050	<0.000050			
	Benzo(a)pyrene (mg/L)	<0.000010	<0.000010			
	Benzo(b)fluoranthene (mg/L)	<0.000050	<0.000050			
	Benzo(g,h,i)perylene (mg/L)	<0.000050	<0.000050			
	Benzo(k)fluoranthene (mg/L)	<0.000050	<0.000050			
	Chrysene (mg/L)	<0.000050	<0.000050			
	Dibenz(a,h)anthracene (mg/L)	<0.000050	<0.000050			

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

Sample ID Description Sampled Date Sampled Time Client ID		L1209363-1 groundwater 09-SEP-12 15:40 PC-MW12-01	L1209363-2 groundwater 10-SEP-12 10:20 PC-MW12-02	L1209363-3 groundwater 10-SEP-12 11:30 PC-MW12-03	L1209363-4 surface water 13-SEP-12 13:30 PC SURFACE	L1209363-5 groundwater 12-SEP-12 10:40 SX-MW12-01
Grouping	Analyte					
WATER						
Polycyclic Aromatic Hydrocarbons	Fluoranthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Fluorene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Indeno(1,2,3-c,d)pyrene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Naphthalene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Phenanthrene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Pyrene (mg/L)	0.000098	<0.000050	<0.000050	<0.000050	<0.000050
	Quinoline (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Surrogate: Acenaphthene d10 (%)	86.1	91.8	93.5	102.1	94.4
	Surrogate: Acridine d9 (%)	89.4	96.4	97.1	103.3	101.1
	Surrogate: Chrysene d12 (%)	80.2	87.6	86.6	83.0	85.4
	Surrogate: Naphthalene d8 (%)	90.2	93.6	91.6	98.4	94.4
	Surrogate: Phenanthrene d10 (%)	88.9	93.4	95.9	95.0	96.3

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

		Sample ID	L1209363-6	L1209363-7	L1209363-8	L1209363-9	L1209363-10
		Description	groundwater	groundwater	groundwater	surface water	groundwater
		Sampled Date	10-SEP-12	10-SEP-12	10-SEP-12	12-SEP-12	11-SEP-12
		Sampled Time	16:30	17:45	16:30	13:20	10:45
		Client ID	SX-MW12-02	SX-MW12-03	SX-MW12-04	SX SURFACE	MA-MW12-01
Grouping	Analyte						
WATER							
Polycyclic Aromatic Hydrocarbons	Fluoranthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Fluorene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Indeno(1,2,3-c,d)pyrene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Naphthalene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Phenanthrene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Pyrene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Quinoline (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050
	Surrogate: Acenaphthene d10 (%)	99.8	90.1	90.2	95.7	94.4	
	Surrogate: Acridine d9 (%)	106.9	95.4	94.6	100.1	93.6	
	Surrogate: Chrysene d12 (%)	93.7	85.2	85.5	89.5	86.4	
	Surrogate: Naphthalene d8 (%)	100.7	90.3	89.7	95.2	93.9	
	Surrogate: Phenanthrene d10 (%)	103.0	92.2	91.2	97.9	95.4	

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

		Sample ID	L1209363-11	L1209363-12	L1209363-13	L1209363-14	L1209363-15
		Description	groundwater	groundwater	groundwater	surface water	groundwater
		Sampled Date	11-SEP-12	11-SEP-12	11-SEP-12	12-SEP-12	13-SEP-12
		Sampled Time	12:30	14:15	15:15	17:30	09:25
		Client ID	MA-MW12-02	MA-MW12-03	MA-MW12-04	MA SURFACE	KE-MW12-01
Grouping	Analyte						
WATER							
Polycyclic Aromatic Hydrocarbons	Fluoranthene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Fluorene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Indeno(1,2,3-c,d)pyrene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Naphthalene (mg/L)	<0.000050	0.000051	<0.000050	<0.000050	0.000059	
	Phenanthrene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Pyrene (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Quinoline (mg/L)	<0.000050	<0.000050	<0.000050	<0.000050	<0.000050	
	Surrogate: Acenaphthene d10 (%)	89.7	89.6	98.3	92.0	104.8	
	Surrogate: Acridine d9 (%)	96.3	90.7	99.3	97.7	101.0	
	Surrogate: Chrysene d12 (%)	86.7	75.9	89.1	78.7	87.4	
	Surrogate: Naphthalene d8 (%)	89.8	88.9	97.8	92.5	88.0	
	Surrogate: Phenanthrene d10 (%)	92.3	91.3	99.6	93.7	96.5	

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

ALS ENVIRONMENTAL ANALYTICAL REPORT

		Sample ID	Description	Sampled Date	Sampled Time	Client ID
		L1209363-16	groundwater	13-SEP-12	09:55	KE-MW12-03
		L1209363-17	surface water	11-SEP-12	19:15	KE SURFACE
Grouping	Analyte					
WATER						
Polycyclic Aromatic Hydrocarbons	Fluoranthene (mg/L)	<0.000050	<0.000050			
	Fluorene (mg/L)	<0.000050	<0.000050			
	Indeno(1,2,3-c,d)pyrene (mg/L)	<0.000050	<0.000050			
	Naphthalene (mg/L)	0.000065	<0.000050			
	Phenanthrene (mg/L)	<0.000050	<0.000050			
	Pyrene (mg/L)	<0.000050	<0.000050			
	Quinoline (mg/L)	<0.000050	<0.000050			
	Surrogate: Acenaphthene d10 (%)	106.9	89.3			
	Surrogate: Acridine d9 (%)	91.2	87.3			
	Surrogate: Chrysene d12 (%)	78.1	75.5			
	Surrogate: Naphthalene d8 (%)	88.8	89.6			
	Surrogate: Phenanthrene d10 (%)	88.4	88.3			

* Please refer to the Reference Information section for an explanation of any qualifiers detected.

Reference Information

QC Samples with Qualifiers & Comments:

QC Type Description	Parameter	Qualifier	Applies to Sample Number(s)
Duplicate	Nitrite (as N)	DLA	L1209363-1, -10, -11, -12, -13, -14, -15, -16, -17, -2, -3, -4, -5, -6, -7, -8, -9
Duplicate	Nitrate (as N)	DLA	L1209363-1, -10, -11, -12, -13, -14, -15, -16, -17, -2, -3, -4, -5, -6, -7, -8, -9
Duplicate	Aluminum (Al)-Dissolved	DLA	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Duplicate	Boron (B)-Dissolved	DLA	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Duplicate	Cadmium (Cd)-Dissolved	DLA	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Duplicate	Chromium (Cr)-Dissolved	DLA	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Duplicate	Copper (Cu)-Dissolved	DLA	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Duplicate	Lead (Pb)-Dissolved	DLA	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Duplicate	Selenium (Se)-Dissolved	DLA	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Duplicate	Zinc (Zn)-Dissolved	DLA	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Duplicate	Fluoride (F)	DLM	L1209363-1, -10, -11, -12, -13, -14, -15, -16, -17, -2, -3, -4, -5, -6, -7, -8, -9
Method Blank	Manganese (Mn)-Dissolved	MB-LOR	L1209363-11, -12, -4, -9
Matrix Spike	Calcium (Ca)-Dissolved	MS-B	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Matrix Spike	Magnesium (Mg)-Dissolved	MS-B	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Matrix Spike	Manganese (Mn)-Dissolved	MS-B	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Matrix Spike	Potassium (K)-Dissolved	MS-B	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Matrix Spike	Uranium (U)-Dissolved	MS-B	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8
Matrix Spike	Sodium (Na)-Dissolved	MS-B	L1209363-1, -10, -13, -14, -15, -16, -2, -3, -5, -6, -7, -8

Qualifiers for Individual Parameters Listed:

Qualifier	Description
DLA	Detection Limit Adjusted For required dilution
DLM	Detection Limit Adjusted For Sample Matrix Effects
MB-LOR	Method Blank exceeds ALS DQO. LORs adjusted for samples with positive hits below 5 times blank level. Please contact ALS if re-analysis is required.
MS-B	Matrix Spike recovery could not be accurately calculated due to high analyte background in sample.
SURR-ND	Surrogate recovery was slightly outside ALS DQO. Reported non-detect results for associated samples were unaffected.
TKNI	TKN result is likely biased low due to Nitrate interference. Nitrate-N is > 10x TKN.

Test Method References:

ALS Test Code	Matrix	Test Description	Method Reference**
ALK-PCT-VA	Water	Alkalinity by Auto. Titration	APHA 2320 "Alkalinity"
This analysis is carried out using procedures adapted from APHA Method 2320 "Alkalinity". Total alkalinity is determined by potentiometric titration to a pH 4.5 endpoint. Bicarbonate, carbonate and hydroxide alkalinity are calculated from phenolphthalein alkalinity and total alkalinity values.			
ALK-PCT-VA	Water	Alkalinity by Auto. Titration	APHA 2320 Alkalinity
This analysis is carried out using procedures adapted from APHA Method 2320 "Alkalinity". Total alkalinity is determined by potentiometric titration to a pH 4.5 endpoint. Bicarbonate, carbonate and hydroxide alkalinity are calculated from phenolphthalein alkalinity and total alkalinity values.			
ALK-SCR-VA	Water	Alkalinity by colour or titration	EPA 310.2 OR APHA 2320
This analysis is carried out using procedures adapted from EPA Method 310.2 "Alkalinity". Total Alkalinity is determined using the methyl orange colourimetric method.			
OR			
This analysis is carried out using procedures adapted from APHA Method 2320 "Alkalinity". Total alkalinity is determined by potentiometric titration to a pH 4.5 endpoint. Bicarbonate, carbonate and hydroxide alkalinity are calculated from phenolphthalein alkalinity and total alkalinity values.			
ANIONS-CL-IC-VA	Water	Chloride by Ion Chromatography	APHA 4110 B.
This analysis is carried out using procedures adapted from APHA Method 4110 B. "Ion Chromatography with Chemical Suppression of Eluent Conductivity" and EPA Method 300.0 "Determination of Inorganic Anions by Ion Chromatography".			
ANIONS-F-IC-VA	Water	Fluoride by Ion Chromatography	APHA 4110 B.
This analysis is carried out using procedures adapted from APHA Method 4110 B. "Ion Chromatography with Chemical Suppression of Eluent Conductivity" and EPA Method 300.0 "Determination of Inorganic Anions by Ion Chromatography".			
ANIONS-NO2-IC-WR	Water	Nitrite Nitrogen by Ion Chromatography	EPA 300.1
This analysis is carried out using procedures adapted from EPA Method 300.1, "Determination of Inorganic Anions by Ion Chromatography", Revision 1.0, April 1999 and from "Determination of Inorganic Anions in Environmental Waters Using a Hydroxide-Selective Column", Application Note 154 v.19, Dionex 2003. Nitrate is detected by UV absorbance.			

Reference Information

ANIONS-NO3-IC-WR	Water	Nitrate Nitrogen by Ion Chromatography	EPA 300.1
This analysis is carried out using procedures adapted from EPA Method 300.1, "Determination of Inorganic Anions by Ion Chromatography", Revision 1.0, April 1999 and from "Determination of Inorganic Anions in Environmental Waters Using a Hydroxide-Selective Column", Application Note 154 v.19, Dionex 2003. Nitrate is detected by UV absorbance.			
ANIONS-SO4-IC-VA	Water	Sulfate by Ion Chromatography	APHA 4110 B.
This analysis is carried out using procedures adapted from APHA Method 4110 B. "Ion Chromatography with Chemical Suppression of Eluent Conductivity" and EPA Method 300.0 "Determination of Inorganic Anions by Ion Chromatography".			
CARBONS-DOC-VA	Water	Dissolved organic carbon by combustion	APHA 5310 TOTAL ORGANIC CARBON (TOC)
This analysis is carried out using procedures adapted from APHA Method 5310 "Total Organic Carbon (TOC)". Dissolved carbon (DOC) fractions are determined by filtering the sample through a 0.45 micron membrane filter prior to analysis.			
COD-COL-VA	Water	Chemical Oxygen Demand by Colorimetric	APHA 5220 D. CHEMICAL OXYGEN DEMAND
This analysis is carried out using procedures adapted from APHA Method 5220 "Chemical Oxygen Demand (COD)". Chemical oxygen demand is determined using the closed reflux colourimetric method.			
EPH-SF-FID-VA	Water	EPH in Water by GCFID	BCMOE EPH GCFID
This analysis is carried out in accordance with the British Columbia Ministry of Environment, Lands and Parks (BCMELP) Analytical Method for Contaminated Sites "Extractable Petroleum Hydrocarbons in Water by GC/FID" (Version 2.1, July 1999). The procedure involves extraction of the entire water sample with dichloromethane. The extract is then solvent exchanged to toluene and analysed by capillary column gas chromatography with flame ionization detection (GC/FID). EPH results include Polycyclic Aromatic Hydrocarbons (PAH) and are therefore not equivalent to Light and Heavy Extractable Petroleum Hydrocarbons (LEPH/HEPH).			
HARDNESS-CALC-VA	Water	Hardness	APHA 2340B
Hardness (also known as Total Hardness) is calculated from the sum of Calcium and Magnesium concentrations, expressed in CaCO3 equivalents. Dissolved Calcium and Magnesium concentrations are preferentially used for the hardness calculation.			
HG-DIS-CVAFS-VA	Water	Dissolved Mercury in Water by CVAFS	EPA SW-846 3005A & EPA 245.7
This analysis is carried out using procedures adapted from "Standard Methods for the Examination of Water and Wastewater" published by the American Public Health Association, and with procedures adapted from "Test Methods for Evaluating Solid Waste" SW-846 published by the United States Environmental Protection Agency (EPA). The procedures may involve preliminary sample treatment by filtration (EPA Method 3005A) and involves a cold-oxidation of the acidified sample using bromine monochloride prior to reduction of the sample with stannous chloride. Instrumental analysis is by cold vapour atomic fluorescence spectrophotometry (EPA Method 245.7).			
LEPH/HEPH-CALC-VA	Water	LEPHs and HEPHs	BC MOE LABORATORY MANUAL (2005)
Light and Heavy Extractable Petroleum Hydrocarbons in water. These results are determined according to the British Columbia Ministry of Environment, Lands, and Parks Analytical Method for Contaminated Sites "Calculation of Light and Heavy Extractable Petroleum Hydrocarbons in Solids or Water". According to this method, LEPH and HEPH are calculated by subtracting selected Polycyclic Aromatic Hydrocarbon results from Extractable Petroleum Hydrocarbon results. To calculate LEPH, the individual results for Acenaphthene, Acridine, Anthracene, Fluorene, Naphthalene and Phenanthrene are subtracted from EPH(C10-19). To calculate HEPH, the individual results for Benz(a)anthracene, Benzo(a)pyrene, Fluoranthene, and Pyrene are subtracted from EPH(C19-32). Analysis of Extractable Petroleum Hydrocarbons adheres to all prescribed elements of the BCMELP method "Extractable Petroleum Hydrocarbons in Water by GC/FID" (Version 2.1, July 20, 1999).			
MET-DIS-ICP-VA	Water	Dissolved Metals in Water by ICP-OES	EPA SW-846 3005A/6010B
This analysis is carried out using procedures adapted from "Standard Methods for the Examination of Water and Wastewater" published by the American Public Health Association, and with procedures adapted from "Test Methods for Evaluating Solid Waste" SW-846 published by the United States Environmental Protection Agency (EPA). The procedure involves filtration (EPA Method 3005A) and analysis by inductively coupled plasma - optical emission spectrophotometry (EPA Method 6010B).			
MET-DIS-LOW-MS-VA	Water	Dissolved Metals in Water by ICPMS(Low)	EPA SW-846 3005A/6020A
This analysis is carried out using procedures adapted from "Standard Methods for the Examination of Water and Wastewater" published by the American Public Health Association, and with procedures adapted from "Test Methods for Evaluating Solid Waste" SW-846 published by the United States Environmental Protection Agency (EPA). The procedures involves preliminary sample treatment by filtration (EPA Method 3005A). Instrumental analysis is by inductively coupled plasma - mass spectrometry (EPA Method 6020A).			
NH3-F-VA	Water	Ammonia in Water by Fluorescence	J. ENVIRON. MONIT., 2005, 7, 37-42, RSC
This analysis is carried out, on sulfuric acid preserved samples, using procedures modified from J. Environ. Monit., 2005, 7, 37 - 42, The Royal Society of Chemistry, "Flow-injection analysis with fluorescence detection for the determination of trace levels of ammonium in seawater", Roslyn J. Waston et al.			
PAH-SF-MS-VA	Water	PAH in Water by GCMS	EPA 3510, 8270
The entire water sample is extracted with dichloromethane, prior to analysis by gas chromatography with mass spectrometric detection (GC/MS). Because the two isomers cannot be readily chromatographically separated, benzo(j)fluoranthene is reported as part of the benzo(b)fluoranthene parameter.			
PAH-SURR-MS-VA	Water	PAH Surrogates for Waters	EPA 3510, 8270
Analysed as per the corresponding PAH test method. Known quantities of surrogate compounds are added prior to analysis to each sample to demonstrate analytical accuracy.			
PH-PCT-VA	Water	pH by Meter (Automated)	APHA 4500-H "pH Value"
This analysis is carried out using procedures adapted from APHA Method 4500-H "pH Value". The pH is determined in the laboratory using a pH electrode			

Reference Information

It is recommended that this analysis be conducted in the field.

PH-PCT-VA Water pH by Meter (Automated) APHA 4500-H pH Value

This analysis is carried out using procedures adapted from APHA Method 4500-H "pH Value". The pH is determined in the laboratory using a pH electrode

It is recommended that this analysis be conducted in the field.

TDS-VA Water Total Dissolved Solids by Gravimetric APHA 2540 C - GRAVIMETRIC

This analysis is carried out using procedures adapted from APHA Method 2540 "Solids". Solids are determined gravimetrically. Total Dissolved Solids (TDS) are determined by filtering a sample through a glass fibre filter, TDS is determined by evaporating the filtrate to dryness at 180 degrees celsius.

TKN-F-VA Water TKN in Water by Fluorescence APHA 4500-NORG D.

This analysis is carried out using procedures adapted from APHA Method 4500-Norg D. "Block Digestion and Flow Injection Analysis". Total Kjeldahl Nitrogen is determined using block digestion followed by Flow-injection analysis with fluorescence detection.

VH-HSFID-VA Water VH in Water by Headspace GCFID B.C. MIN. OF ENV. LAB. MAN. (2009)

The water sample, with added reagents, is heated in a sealed vial to equilibrium. The headspace from the vial is transferred into a gas chromatograph. Compounds eluting between n-hexane and n-decane are measured and summed together using flame-ionization detection.

VH-SURR-FID-VA Water VH Surrogates for Waters B.C. MIN. OF ENV. LAB. MAN. (2009)

VOC-HSMS-VA Water VOCs in water by Headspace GCMS EPA8260B, 5021

The water sample, with added reagents, is heated in a sealed vial to equilibrium. The headspace from the vial is transferred into a gas chromatograph. Target compound concentrations are measured using mass spectrometry detection.

VOC7-HSMS-VA Water BTEX/MTBE/Styrene by Headspace GCMS EPA8260B, 5021

The water sample, with added reagents, is heated in a sealed vial to equilibrium. The headspace from the vial is transferred into a gas chromatograph. Target compound concentrations are measured using mass spectrometry detection.

VOC7/VOC-SURR-MS-VA Water VOC7 and/or VOC Surrogates for Waters EPA8260B, 5021

VPH-CALC-VA Water VPH is VH minus select aromatics BC MOE LABORATORY MANUAL (2005)

These results are determined according to the British Columbia Ministry of Environment Analytical Method for Contaminated Sites "Calculation of Volatile Petroleum Hydrocarbons in Solids or Water". The concentrations of specific Monocyclic Aromatic Hydrocarbons (Benzene, Toluene, Ethylbenzene, Xylenes and, in solids, Styrene) are subtracted from the collective concentration of Volatile Hydrocarbons (VH) that elute between n-hexane (nC6) and n-decane (nC10).

XYLENES-CALC-VA Water Sum of Xylene Isomer Concentrations CALCULATION

Calculation of Total Xylenes

Total Xylenes is the sum of the concentrations of the ortho, meta, and para Xylene isomers. Results below detection limit (DL) are treated as zero. The DL for Total Xylenes is set to a value no less than the square root of the sum of the squares of the DLs of the individual Xylenes.

** ALS test methods may incorporate modifications from specified reference methods to improve performance.

The last two letters of the above test code(s) indicate the laboratory that performed analytical analysis for that test. Refer to the list below:

Laboratory Definition Code	Laboratory Location
----------------------------	---------------------

WR	ALS ENVIRONMENTAL - WHITEHORSE, YUKON, CANADA
----	---

VA	ALS ENVIRONMENTAL - VANCOUVER, BRITISH COLUMBIA, CANADA
----	---

Chain of Custody Numbers:

GLOSSARY OF REPORT TERMS

Surrogate - A compound that is similar in behaviour to target analyte(s), but that does not occur naturally in environmental samples. For applicable tests, surrogates are added to samples prior to analysis as a check on recovery.

mg/kg - milligrams per kilogram based on dry weight of sample.

mg/kg wwt - milligrams per kilogram based on wet weight of sample.

mg/kg lwt - milligrams per kilogram based on lipid-adjusted weight of sample.

mg/L - milligrams per litre.

< - Less than.

D.L. - The reported Detection Limit, also known as the Limit of Reporting (LOR).

N/A - Result not available. Refer to qualifier code and definition for explanation.

Test results reported relate only to the samples as received by the laboratory.

UNLESS OTHERWISE STATED, ALL SAMPLES WERE RECEIVED IN ACCEPTABLE CONDITION.

Analytical results in unsigned test reports with the DRAFT watermark are subject to change, pending final QC review.

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 1 of 37

Client: GOLDER ASSOCIATES LTD.

201B, 170 Titanium Way

Whitehorse YT Y1A 0G1

Contact: Andrea Badger

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
ALK-PCT-VA		Water						
Batch	R2440917							
WG1551094-10 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			105.2		%		85-115	21-SEP-12
WG1551094-11 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			102.5		%		85-115	21-SEP-12
WG1551094-12 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			105.5		%		85-115	21-SEP-12
WG1551094-13 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			105.2		%		85-115	21-SEP-12
WG1551094-14 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			103.6		%		85-115	21-SEP-12
WG1551094-15 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			103.8		%		85-115	21-SEP-12
WG1551094-16 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			106.1		%		85-115	21-SEP-12
WG1551094-9 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			107.8		%		85-115	21-SEP-12
WG1551094-34 DUP		L1209363-12						
Alkalinity, Total (as CaCO ₃)		154	155		mg/L	0.2	20	21-SEP-12
Alkalinity, Bicarbonate (as CaCO ₃)		154	155		mg/L	0.2	20	21-SEP-12
Alkalinity, Carbonate (as CaCO ₃)		<1.0	<1.0	RPD-NA	mg/L	N/A	25	21-SEP-12
Alkalinity, Hydroxide (as CaCO ₃)		<1.0	<1.0	RPD-NA	mg/L	N/A	20	21-SEP-12
WG1551094-2 MB								
Alkalinity, Total (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Bicarbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Carbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Hydroxide (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
WG1551094-4 MB								
Alkalinity, Total (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Bicarbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Carbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Hydroxide (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
WG1551094-5 MB								
Alkalinity, Total (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Bicarbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Carbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Hydroxide (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
WG1551094-6 MB								
Alkalinity, Total (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 2 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
ALK-PCT-VA		Water						
Batch R2440917								
WG1551094-6 MB								
Alkalinity, Bicarbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Carbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Hydroxide (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
WG1551094-7 MB								
Alkalinity, Total (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Bicarbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Carbonate (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Alkalinity, Hydroxide (as CaCO ₃)			<1.0		mg/L		1	21-SEP-12
Batch R2443112								
WG1553049-10 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			104.1		%		85-115	25-SEP-12
WG1553049-11 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			104.3		%		85-115	25-SEP-12
WG1553049-12 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			104.1		%		85-115	25-SEP-12
WG1553049-13 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			102.9		%		85-115	25-SEP-12
WG1553049-14 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			102.5		%		85-115	25-SEP-12
WG1553049-15 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			105.2		%		85-115	25-SEP-12
WG1553049-16 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			102.1		%		85-115	25-SEP-12
WG1553049-9 CRM		VA-ALK-PCT-CONTROL						
Alkalinity, Total (as CaCO ₃)			104.5		%		85-115	25-SEP-12
WG1553049-8 MB								
Alkalinity, Total (as CaCO ₃)			<1.0		mg/L		1	25-SEP-12
Alkalinity, Bicarbonate (as CaCO ₃)			<1.0		mg/L		1	25-SEP-12
Alkalinity, Carbonate (as CaCO ₃)			<1.0		mg/L		1	25-SEP-12
Alkalinity, Hydroxide (as CaCO ₃)			<1.0		mg/L		1	25-SEP-12
ALK-SCR-VA		Water						
Batch R2440701								
WG1550572-2 CRM		VA-ALKL-CONTROL						
Alkalinity, Total (as CaCO ₃)			97.4		%		85-115	20-SEP-12
WG1550572-5 CRM		VA-ALKM-CONTROL						
Alkalinity, Total (as CaCO ₃)			106.3		%		85-115	20-SEP-12
WG1550572-10 DUP		L1209363-10						



Workorder: L1209363

Page 3 of 37

ANIONS-F-IC-VA Water

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 4 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
ANIONS-F-IC-VA		Water						
Batch	R2439735							
WG1549122-3	DUP	L1209363-12						
Fluoride (F)		0.074	0.074		mg/L	0.0	20	19-SEP-12
WG1549122-15	LCS							
Fluoride (F)			101.9		%		85-115	19-SEP-12
WG1549122-2	LCS							
Fluoride (F)			101.6		%		85-115	19-SEP-12
WG1549122-1	MB							
Fluoride (F)			<0.020		mg/L		0.02	19-SEP-12
WG1549122-10	MB							
Fluoride (F)			<0.020		mg/L		0.02	19-SEP-12
WG1549122-13	MB							
Fluoride (F)			<0.020		mg/L		0.02	19-SEP-12
WG1549122-4	MB							
Fluoride (F)			<0.020		mg/L		0.02	19-SEP-12
WG1549122-7	MB							
Fluoride (F)			<0.020		mg/L		0.02	19-SEP-12
WG1549122-11	MS	L1209564-7						
Fluoride (F)			100.4		%		75-125	19-SEP-12
WG1549122-14	MS	L1209704-1						
Fluoride (F)			104.6		%		75-125	19-SEP-12
WG1549122-5	MS	L1209363-7						
Fluoride (F)			100.5		%		75-125	19-SEP-12
WG1549122-8	MS	L1209433-3						
Fluoride (F)			104.0		%		75-125	19-SEP-12
ANIONS-NO2-IC-WR		Water						
Batch	R2439214							
WG1549682-3	DUP	L1209363-1						
Nitrite (as N)		<0.050	<0.050	RPD-NA	mg/L	N/A	20	14-SEP-12
WG1549682-2	LCS							
Nitrite (as N)			104.8		%		85-115	14-SEP-12
WG1549682-6	LCS							
Nitrite (as N)			104.0		%		85-115	14-SEP-12
WG1549682-1	MB							
Nitrite (as N)			<0.0010		mg/L		0.001	14-SEP-12
WG1549682-5	MB							
Nitrite (as N)			<0.0010		mg/L		0.001	14-SEP-12
WG1549682-4	MS	L1209363-7						
Nitrite (as N)			97.1		%		75-125	14-SEP-12
WG1549682-8	MS	L1209430-2						

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 5 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
ANIONS-NO2-IC-WR								
Batch R2439214								
WG1549682-8 MS		L1209430-2						
Nitrite (as N)	Water		102.8		%		75-125	14-SEP-12
ANIONS-NO3-IC-WR								
Batch R2439214								
WG1549682-3 DUP		L1209363-1						
Nitrate (as N)	Water	<0.25	<0.25	RPD-NA	mg/L	N/A	20	14-SEP-12
WG1549682-2 LCS								
Nitrate (as N)			104.2		%		85-115	14-SEP-12
WG1549682-6 LCS								
Nitrate (as N)			104.5		%		85-115	14-SEP-12
WG1549682-1 MB								
Nitrate (as N)			<0.0050		mg/L		0.005	14-SEP-12
WG1549682-5 MB								
Nitrate (as N)			<0.0050		mg/L		0.005	14-SEP-12
WG1549682-4 MS		L1209363-7						
Nitrate (as N)			99.6		%		75-125	14-SEP-12
WG1549682-8 MS		L1209430-2						
Nitrate (as N)			100.7		%		75-125	14-SEP-12
ANIONS-SO4-IC-VA								
Batch R2439735								
WG1549122-3 DUP		L1209363-12						
Sulfate (SO4)	Water	54.7	54.7		mg/L	0.0	20	19-SEP-12
WG1549122-15 LCS								
Sulfate (SO4)			101.1		%		85-115	19-SEP-12
WG1549122-2 LCS								
Sulfate (SO4)			100.9		%		85-115	19-SEP-12
WG1549122-1 MB								
Sulfate (SO4)			<0.50		mg/L		0.5	19-SEP-12
WG1549122-10 MB								
Sulfate (SO4)			<0.50		mg/L		0.5	19-SEP-12
WG1549122-13 MB								
Sulfate (SO4)			<0.50		mg/L		0.5	19-SEP-12
WG1549122-4 MB								
Sulfate (SO4)			<0.50		mg/L		0.5	19-SEP-12
WG1549122-7 MB								
Sulfate (SO4)			<0.50		mg/L		0.5	19-SEP-12
WG1549122-11 MS		L1209564-7						

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 6 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
ANIONS-SO4-IC-VA								
Batch R2439735								
WG1549122-11 MS		L1209564-7						
Sulfate (SO4)			102.9		%		75-125	19-SEP-12
WG1549122-14 MS		L1209704-1						
Sulfate (SO4)			102.5		%		75-125	19-SEP-12
WG1549122-5 MS		L1209363-7						
Sulfate (SO4)			101.2		%		75-125	19-SEP-12
WG1549122-8 MS		L1209433-3						
Sulfate (SO4)			97.9		%		75-125	19-SEP-12
CARBONS-DOC-VA								
Batch R2439116								
WG1549198-2 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			100.2		%		80-120	18-SEP-12
WG1549198-4 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			98.0		%		80-120	18-SEP-12
WG1549198-1 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	18-SEP-12
WG1549198-3 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	18-SEP-12
WG1549198-7 MS		L1209483-3						
Dissolved Organic Carbon			90.6		%		70-130	18-SEP-12
Batch R2439195								
WG1548363-10 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			97.7		%		80-120	17-SEP-12
WG1548363-2 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			99.5		%		80-120	17-SEP-12
WG1548363-4 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			94.2		%		80-120	17-SEP-12
WG1548363-6 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			95.6		%		80-120	17-SEP-12
WG1548363-8 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			95.8		%		80-120	17-SEP-12
WG1548363-13 DUP		L1209363-16						
Dissolved Organic Carbon		5.04	4.95		mg/L	1.8	20	17-SEP-12
WG1548363-1 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	17-SEP-12
WG1548363-3 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	17-SEP-12
WG1548363-5 MB								

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 7 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
CARBONS-DOC-VA								
Batch R2439195								
WG1548363-5 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	17-SEP-12
WG1548363-7 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	17-SEP-12
WG1548363-9 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	17-SEP-12
WG1548363-14 MS		L1209478-2						
Dissolved Organic Carbon			96.4		%		70-130	17-SEP-12
Batch R2439946								
WG1550152-2 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			98.1		%		80-120	19-SEP-12
WG1550152-4 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			94.2		%		80-120	19-SEP-12
WG1550152-6 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			90.1		%		80-120	19-SEP-12
WG1550152-8 CRM		VA-DOC-C-CAFFEINE						
Dissolved Organic Carbon			90.4		%		80-120	19-SEP-12
WG1550152-1 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	19-SEP-12
WG1550152-3 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	19-SEP-12
WG1550152-5 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	19-SEP-12
WG1550152-7 MB								
Dissolved Organic Carbon			<0.50		mg/L		0.5	19-SEP-12
WG1550152-10 MS		L1210319-11						
Dissolved Organic Carbon			100.4		%		70-130	19-SEP-12
COD-COL-VA								
Batch R2437967								
WG1548328-10 LCS								
COD			104.4		%		85-115	18-SEP-12
WG1548328-2 LCS								
COD			104.5		%		85-115	18-SEP-12
WG1548328-6 LCS								
COD			102.1		%		85-115	18-SEP-12
WG1548328-1 MB								
COD			<20		mg/L		20	18-SEP-12
WG1548328-5 MB								

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 8 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
COD-COL-VA								
Batch R2437967								
WG1548328-5 MB								
COD			<20		mg/L		20	18-SEP-12
WG1548328-9 MB								
COD			<20		mg/L		20	18-SEP-12
WG1548328-4 MS		L1209045-1						
COD			103.7		%		75-125	18-SEP-12
WG1548328-8 MS		L1209491-2						
COD			96.7		%		75-125	18-SEP-12
EPH-SF-FID-VA								
Batch R2439979								
WG1549364-1 MB								
EPH10-19			<0.25		mg/L		0.25	20-SEP-12
EPH19-32			<0.25		mg/L		0.25	20-SEP-12
Batch R2440082								
WG1549364-3 MB								
EPH10-19			<0.25		mg/L		0.25	21-SEP-12
EPH19-32			<0.25		mg/L		0.25	21-SEP-12
Batch R2442176								
WG1550411-1 MB								
EPH10-19			<0.25		mg/L		0.25	24-SEP-12
EPH19-32			<0.25		mg/L		0.25	24-SEP-12
WG1550411-3 MB								
EPH10-19			<0.25		mg/L		0.25	24-SEP-12
EPH19-32			<0.25		mg/L		0.25	24-SEP-12
HG-DIS-CVAFS-VA								
Batch R2438056								
WG1548035-3 LCS								
Mercury (Hg)-Dissolved			91.4		%		80-120	18-SEP-12
WG1548035-1 MB								
Mercury (Hg)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Batch R2439159								
WG1548683-10 LCS								
Mercury (Hg)-Dissolved			95.4		%		80-120	19-SEP-12
WG1548683-11 LCS								
Mercury (Hg)-Dissolved			99.3		%		80-120	19-SEP-12
WG1548683-1 MB								
Mercury (Hg)-Dissolved			<0.000050		mg/L		0.00005	19-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 9 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
HG-DIS-CVAFS-VA		Water						
Batch R2439159								
WG1548683-7 MB								
Mercury (Hg)-Dissolved			<0.000050		mg/L		0.00005	19-SEP-12
Batch R2440928								
WG1548035-18 DUP		L1209363-2						
Mercury (Hg)-Dissolved		<0.00020	<0.000050	RPD-NA	mg/L	N/A	20	21-SEP-12
WG1548035-19 MS		L1209363-3						
Mercury (Hg)-Dissolved			87.1		%		70-130	21-SEP-12
Batch R2442023								
WG1552509-8 MB								
Mercury (Hg)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Batch R2443000								
WG1552509-14 LCS								
Mercury (Hg)-Dissolved			89.5		%		80-120	25-SEP-12
WG1552509-15 LCS								
Mercury (Hg)-Dissolved			90.8		%		80-120	25-SEP-12
WG1552509-7 LCS								
Mercury (Hg)-Dissolved			89.9		%		80-120	25-SEP-12
WG1552509-1 MB								
Mercury (Hg)-Dissolved			<0.000050		mg/L		0.00005	25-SEP-12
WG1552509-9 MB								
Mercury (Hg)-Dissolved			<0.000050		mg/L		0.00005	25-SEP-12
MET-DIS-ICP-VA		Water						
Batch R2437951								
WG1548035-2 CRM		VA-HIGH-WATRM						
Beryllium (Be)-Dissolved			95.2		%		80-120	17-SEP-12
Bismuth (Bi)-Dissolved			99.6		%		80-120	17-SEP-12
Cobalt (Co)-Dissolved			95.0		%		80-120	17-SEP-12
Iron (Fe)-Dissolved			97.4		%		80-120	17-SEP-12
Lithium (Li)-Dissolved			100.2		%		80-120	17-SEP-12
Molybdenum (Mo)-Dissolved			96.4		%		80-120	17-SEP-12
Nickel (Ni)-Dissolved			96.3		%		80-120	17-SEP-12
Phosphorus (P)-Dissolved			101.7		%		80-120	17-SEP-12
Silicon (Si)-Dissolved			103.7		%		80-120	17-SEP-12
Silver (Ag)-Dissolved			93.8		%		80-120	17-SEP-12
Sodium (Na)-Dissolved			99.7		%		80-120	17-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 10 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-ICP-VA		Water						
Batch	R2437951							
WG1548035-2 CRM		VA-HIGH-WATRM						
Strontium (Sr)-Dissolved			99.3		%		80-120	17-SEP-12
Thallium (Tl)-Dissolved			96.9		%		80-120	17-SEP-12
Tin (Sn)-Dissolved			98.9		%		80-120	17-SEP-12
Titanium (Ti)-Dissolved			96.9		%		80-120	17-SEP-12
Vanadium (V)-Dissolved			96.2		%		80-120	17-SEP-12
WG1548035-1 MB								
Beryllium (Be)-Dissolved			<0.0050		mg/L		0.005	17-SEP-12
Bismuth (Bi)-Dissolved			<0.20		mg/L		0.2	17-SEP-12
Cobalt (Co)-Dissolved			<0.010		mg/L		0.01	17-SEP-12
Iron (Fe)-Dissolved			<0.030		mg/L		0.03	17-SEP-12
Lithium (Li)-Dissolved			<0.010		mg/L		0.01	17-SEP-12
Molybdenum (Mo)-Dissolved			<0.030		mg/L		0.03	17-SEP-12
Nickel (Ni)-Dissolved			<0.050		mg/L		0.05	17-SEP-12
Phosphorus (P)-Dissolved			<0.30		mg/L		0.3	17-SEP-12
Silicon (Si)-Dissolved			<0.050		mg/L		0.05	17-SEP-12
Silver (Ag)-Dissolved			<0.010		mg/L		0.01	17-SEP-12
Sodium (Na)-Dissolved			<2.0		mg/L		2	17-SEP-12
Strontium (Sr)-Dissolved			<0.0050		mg/L		0.005	17-SEP-12
Thallium (Tl)-Dissolved			<0.20		mg/L		0.2	17-SEP-12
Tin (Sn)-Dissolved			<0.030		mg/L		0.03	17-SEP-12
Titanium (Ti)-Dissolved			<0.010		mg/L		0.01	17-SEP-12
Vanadium (V)-Dissolved			<0.030		mg/L		0.03	17-SEP-12
Batch	R2438999							
WG1548683-4 CRM		VA-HIGH-WATRM						
Beryllium (Be)-Dissolved			94.1		%		80-120	18-SEP-12
Bismuth (Bi)-Dissolved			99.0		%		80-120	18-SEP-12
Cobalt (Co)-Dissolved			96.0		%		80-120	18-SEP-12
Iron (Fe)-Dissolved			98.2		%		80-120	18-SEP-12
Lithium (Li)-Dissolved			100.0		%		80-120	18-SEP-12
Molybdenum (Mo)-Dissolved			97.0		%		80-120	18-SEP-12
Nickel (Ni)-Dissolved			96.4		%		80-120	18-SEP-12
Phosphorus (P)-Dissolved			99.1		%		80-120	18-SEP-12
Silicon (Si)-Dissolved			102.3		%		80-120	18-SEP-12
Silver (Ag)-Dissolved			95.2		%		80-120	18-SEP-12
Sodium (Na)-Dissolved			99.1		%		80-120	18-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 11 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-ICP-VA	Water							
Batch	R2438999							
WG1548683-4 CRM		VA-HIGH-WATRM						
Strontium (Sr)-Dissolved			100.1		%		80-120	18-SEP-12
Thallium (Tl)-Dissolved			97.6		%		80-120	18-SEP-12
Tin (Sn)-Dissolved			97.6		%		80-120	18-SEP-12
Titanium (Ti)-Dissolved			100.9		%		80-120	18-SEP-12
Vanadium (V)-Dissolved			96.4		%		80-120	18-SEP-12
WG1548683-8 CRM		VA-HIGH-WATRM						
Beryllium (Be)-Dissolved			92.8		%		80-120	18-SEP-12
Bismuth (Bi)-Dissolved			99.0		%		80-120	18-SEP-12
Cobalt (Co)-Dissolved			96.4		%		80-120	18-SEP-12
Iron (Fe)-Dissolved			97.0		%		80-120	18-SEP-12
Lithium (Li)-Dissolved			98.3		%		80-120	18-SEP-12
Molybdenum (Mo)-Dissolved			97.1		%		80-120	18-SEP-12
Nickel (Ni)-Dissolved			96.8		%		80-120	18-SEP-12
Phosphorus (P)-Dissolved			99.0		%		80-120	18-SEP-12
Silicon (Si)-Dissolved			101.3		%		80-120	18-SEP-12
Silver (Ag)-Dissolved			94.9		%		80-120	18-SEP-12
Sodium (Na)-Dissolved			98.3		%		80-120	18-SEP-12
Strontium (Sr)-Dissolved			98.4		%		80-120	18-SEP-12
Thallium (Tl)-Dissolved			98.5		%		80-120	18-SEP-12
Tin (Sn)-Dissolved			98.2		%		80-120	18-SEP-12
Titanium (Ti)-Dissolved			100.1		%		80-120	18-SEP-12
Vanadium (V)-Dissolved			95.0		%		80-120	18-SEP-12
WG1548683-1 MB								
Beryllium (Be)-Dissolved			<0.0050		mg/L		0.005	18-SEP-12
Bismuth (Bi)-Dissolved			<0.20		mg/L		0.2	18-SEP-12
Cobalt (Co)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Iron (Fe)-Dissolved			<0.030		mg/L		0.03	18-SEP-12
Lithium (Li)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Molybdenum (Mo)-Dissolved			<0.030		mg/L		0.03	18-SEP-12
Nickel (Ni)-Dissolved			<0.050		mg/L		0.05	18-SEP-12
Phosphorus (P)-Dissolved			<0.30		mg/L		0.3	18-SEP-12
Silicon (Si)-Dissolved			<0.050		mg/L		0.05	18-SEP-12
Silver (Ag)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Sodium (Na)-Dissolved			<2.0		mg/L		2	18-SEP-12
Strontium (Sr)-Dissolved			<0.0050		mg/L		0.005	18-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 12 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-ICP-VA								
Water								
Batch	R2438999							
WG1548683-1 MB								
Thallium (Tl)-Dissolved			<0.20		mg/L		0.2	18-SEP-12
Tin (Sn)-Dissolved			<0.030		mg/L		0.03	18-SEP-12
Titanium (Ti)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Vanadium (V)-Dissolved			<0.030		mg/L		0.03	18-SEP-12
WG1548683-7 MB								
Beryllium (Be)-Dissolved			<0.0050		mg/L		0.005	18-SEP-12
Bismuth (Bi)-Dissolved			<0.20		mg/L		0.2	18-SEP-12
Cobalt (Co)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Iron (Fe)-Dissolved			<0.030		mg/L		0.03	18-SEP-12
Lithium (Li)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Molybdenum (Mo)-Dissolved			<0.030		mg/L		0.03	18-SEP-12
Nickel (Ni)-Dissolved			<0.050		mg/L		0.05	18-SEP-12
Phosphorus (P)-Dissolved			<0.30		mg/L		0.3	18-SEP-12
Silicon (Si)-Dissolved			<0.050		mg/L		0.05	18-SEP-12
Silver (Ag)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Sodium (Na)-Dissolved			<2.0		mg/L		2	18-SEP-12
Strontium (Sr)-Dissolved			<0.0050		mg/L		0.005	18-SEP-12
Thallium (Tl)-Dissolved			<0.20		mg/L		0.2	18-SEP-12
Tin (Sn)-Dissolved			<0.030		mg/L		0.03	18-SEP-12
Titanium (Ti)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Vanadium (V)-Dissolved			<0.030		mg/L		0.03	18-SEP-12
Batch	R2439886							
WG1548035-17 MS		L1208829-3						
Iron (Fe)-Dissolved			93.9		%		70-130	20-SEP-12
Sodium (Na)-Dissolved			100.1		%		70-130	20-SEP-12
Titanium (Ti)-Dissolved			106.0		%		70-130	20-SEP-12
Batch	R2440104							
WG1548035-11 MS		L1209483-3						
Iron (Fe)-Dissolved			96.0		%		70-130	19-SEP-12
Sodium (Na)-Dissolved			102.0		%		70-130	19-SEP-12
Titanium (Ti)-Dissolved			105.4		%		70-130	19-SEP-12
Batch	R2441032							
WG1548683-6 MS		L1209093-4						
Iron (Fe)-Dissolved			90.8		%		70-130	20-SEP-12
Sodium (Na)-Dissolved			103.3		%		70-130	20-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 13 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-ICP-VA	Water							
Batch R2441032								
WG1548683-6 MS		L1209093-4						
Titanium (Ti)-Dissolved			103.7		%		70-130	20-SEP-12
Batch R2442122								
WG1552509-10 CRM		VA-HIGH-WATRM						
Beryllium (Be)-Dissolved			98.6		%		80-120	24-SEP-12
Bismuth (Bi)-Dissolved			102.1		%		80-120	24-SEP-12
Cobalt (Co)-Dissolved			97.5		%		80-120	24-SEP-12
Iron (Fe)-Dissolved			100.2		%		80-120	24-SEP-12
Lithium (Li)-Dissolved			100.9		%		80-120	24-SEP-12
Molybdenum (Mo)-Dissolved			100.1		%		80-120	24-SEP-12
Nickel (Ni)-Dissolved			98.1		%		80-120	24-SEP-12
Phosphorus (P)-Dissolved			102.2		%		80-120	24-SEP-12
Silicon (Si)-Dissolved			102.1		%		80-120	24-SEP-12
Silver (Ag)-Dissolved			101.9		%		80-120	24-SEP-12
Sodium (Na)-Dissolved			102.2		%		80-120	24-SEP-12
Strontium (Sr)-Dissolved			101.8		%		80-120	24-SEP-12
Thallium (Tl)-Dissolved			100.1		%		80-120	24-SEP-12
Tin (Sn)-Dissolved			98.6		%		80-120	24-SEP-12
Titanium (Ti)-Dissolved			105.0		%		80-120	24-SEP-12
Vanadium (V)-Dissolved			101.3		%		80-120	24-SEP-12
WG1552509-8 MB								
Beryllium (Be)-Dissolved			<0.0050		mg/L		0.005	24-SEP-12
Bismuth (Bi)-Dissolved			<0.20		mg/L		0.2	24-SEP-12
Cobalt (Co)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Iron (Fe)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Lithium (Li)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Molybdenum (Mo)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Nickel (Ni)-Dissolved			<0.050		mg/L		0.05	24-SEP-12
Phosphorus (P)-Dissolved			<0.30		mg/L		0.3	24-SEP-12
Silicon (Si)-Dissolved			<0.050		mg/L		0.05	24-SEP-12
Silver (Ag)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Sodium (Na)-Dissolved			<2.0		mg/L		2	24-SEP-12
Strontium (Sr)-Dissolved			<0.0050		mg/L		0.005	24-SEP-12
Thallium (Tl)-Dissolved			<0.20		mg/L		0.2	24-SEP-12
Tin (Sn)-Dissolved			<0.030		mg/L		0.03	24-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 14 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-ICP-VA		Water						
Batch	R2442122							
WG1552509-8 MB								
Titanium (Ti)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Vanadium (V)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Batch	R2442237							
WG1548035-27 MS		L1209469-4						
Iron (Fe)-Dissolved			95.2		%		70-130	21-SEP-12
Sodium (Na)-Dissolved			104.9		%		70-130	21-SEP-12
Titanium (Ti)-Dissolved			105.2		%		70-130	21-SEP-12
Batch	R2442242							
WG1548035-18 DUP		L1209363-2						
Beryllium (Be)-Dissolved		<0.0050	<0.0050	RPD-NA	mg/L	N/A	20	21-SEP-12
Bismuth (Bi)-Dissolved		<0.20	<0.20	RPD-NA	mg/L	N/A	20	21-SEP-12
Cobalt (Co)-Dissolved		<0.010	<0.010	RPD-NA	mg/L	N/A	20	21-SEP-12
Iron (Fe)-Dissolved		0.475	0.481		mg/L	1.4	20	21-SEP-12
Lithium (Li)-Dissolved		0.021	0.021		mg/L	0.4	20	21-SEP-12
Molybdenum (Mo)-Dissolved		<0.030	<0.030	RPD-NA	mg/L	N/A	20	21-SEP-12
Nickel (Ni)-Dissolved		<0.050	<0.050	RPD-NA	mg/L	N/A	20	21-SEP-12
Phosphorus (P)-Dissolved		<0.30	<0.30	RPD-NA	mg/L	N/A	20	21-SEP-12
Silicon (Si)-Dissolved		6.51	6.58		mg/L	1.1	20	21-SEP-12
Silver (Ag)-Dissolved		<0.010	<0.010	RPD-NA	mg/L	N/A	20	21-SEP-12
Sodium (Na)-Dissolved		113	113		mg/L	0.1	20	21-SEP-12
Strontium (Sr)-Dissolved		2.20	2.22		mg/L	0.7	20	21-SEP-12
Thallium (Tl)-Dissolved		<0.20	<0.20	RPD-NA	mg/L	N/A	20	21-SEP-12
Tin (Sn)-Dissolved		<0.030	<0.030	RPD-NA	mg/L	N/A	20	21-SEP-12
Titanium (Ti)-Dissolved		0.018	0.019		mg/L	2.7	20	21-SEP-12
Vanadium (V)-Dissolved		<0.030	<0.030	RPD-NA	mg/L	N/A	20	21-SEP-12
WG1548035-19 MS		L1209363-3						
Iron (Fe)-Dissolved			104.2		%		70-130	21-SEP-12
Sodium (Na)-Dissolved			N/A	MS-B	%		-	21-SEP-12
Titanium (Ti)-Dissolved			113.9		%		70-130	21-SEP-12
Batch	R2442243							
WG1548035-25 MS		L1209711-3						
Iron (Fe)-Dissolved			94.5		%		70-130	22-SEP-12
Sodium (Na)-Dissolved			97.7		%		70-130	22-SEP-12
Titanium (Ti)-Dissolved			99.3		%		70-130	22-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 15 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-ICP-VA								
Water								
Batch	R2442493							
WG1548035-29 MS		L1210039-13						
Iron (Fe)-Dissolved			93.3		%		70-130	22-SEP-12
Sodium (Na)-Dissolved			101.6		%		70-130	22-SEP-12
Titanium (Ti)-Dissolved			107.9		%		70-130	22-SEP-12
WG1548035-31 MS		L1210039-31						
Iron (Fe)-Dissolved			93.9		%		70-130	22-SEP-12
Sodium (Na)-Dissolved			98.5		%		70-130	22-SEP-12
Titanium (Ti)-Dissolved			104.9		%		70-130	22-SEP-12
Batch	R2442899							
WG1552509-11 CRM		VA-HIGH-WATRM						
Beryllium (Be)-Dissolved			95.7		%		80-120	24-SEP-12
Bismuth (Bi)-Dissolved			99.1		%		80-120	24-SEP-12
Cobalt (Co)-Dissolved			95.6		%		80-120	24-SEP-12
Iron (Fe)-Dissolved			98.1		%		80-120	24-SEP-12
Lithium (Li)-Dissolved			101.3		%		80-120	24-SEP-12
Molybdenum (Mo)-Dissolved			97.6		%		80-120	24-SEP-12
Nickel (Ni)-Dissolved			97.2		%		80-120	24-SEP-12
Phosphorus (P)-Dissolved			100.4		%		80-120	24-SEP-12
Silicon (Si)-Dissolved			100.8		%		80-120	24-SEP-12
Silver (Ag)-Dissolved			102.4		%		80-120	24-SEP-12
Sodium (Na)-Dissolved			97.1		%		80-120	24-SEP-12
Strontium (Sr)-Dissolved			100.0		%		80-120	24-SEP-12
Thallium (Tl)-Dissolved			96.9		%		80-120	24-SEP-12
Tin (Sn)-Dissolved			99.0		%		80-120	24-SEP-12
Titanium (Ti)-Dissolved			102.1		%		80-120	24-SEP-12
Vanadium (V)-Dissolved			100.9		%		80-120	24-SEP-12
WG1552509-5 CRM		VA-HIGH-WATRM						
Beryllium (Be)-Dissolved			96.5		%		80-120	24-SEP-12
Bismuth (Bi)-Dissolved			99.1		%		80-120	24-SEP-12
Cobalt (Co)-Dissolved			95.4		%		80-120	24-SEP-12
Iron (Fe)-Dissolved			98.7		%		80-120	24-SEP-12
Lithium (Li)-Dissolved			106.5		%		80-120	24-SEP-12
Molybdenum (Mo)-Dissolved			99.3		%		80-120	24-SEP-12
Nickel (Ni)-Dissolved			97.5		%		80-120	24-SEP-12
Phosphorus (P)-Dissolved			100.9		%		80-120	24-SEP-12
Silicon (Si)-Dissolved			102.7		%		80-120	24-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 16 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-ICP-VA	Water							
Batch	R2442899							
WG1552509-5 CRM		VA-HIGH-WATRM						
Silver (Ag)-Dissolved			104.3		%		80-120	24-SEP-12
Sodium (Na)-Dissolved			98.4		%		80-120	24-SEP-12
Strontium (Sr)-Dissolved			101.8		%		80-120	24-SEP-12
Thallium (Tl)-Dissolved			97.9		%		80-120	24-SEP-12
Tin (Sn)-Dissolved			97.7		%		80-120	24-SEP-12
Titanium (Ti)-Dissolved			103.0		%		80-120	24-SEP-12
Vanadium (V)-Dissolved			101.6		%		80-120	24-SEP-12
WG1552509-1 MB								
Beryllium (Be)-Dissolved			<0.0050		mg/L		0.005	24-SEP-12
Bismuth (Bi)-Dissolved			<0.20		mg/L		0.2	24-SEP-12
Cobalt (Co)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Iron (Fe)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Lithium (Li)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Molybdenum (Mo)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Nickel (Ni)-Dissolved			<0.050		mg/L		0.05	24-SEP-12
Phosphorus (P)-Dissolved			<0.30		mg/L		0.3	24-SEP-12
Silicon (Si)-Dissolved			<0.050		mg/L		0.05	24-SEP-12
Silver (Ag)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Sodium (Na)-Dissolved			<2.0		mg/L		2	24-SEP-12
Strontium (Sr)-Dissolved			<0.0050		mg/L		0.005	24-SEP-12
Thallium (Tl)-Dissolved			<0.20		mg/L		0.2	24-SEP-12
Tin (Sn)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Titanium (Ti)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Vanadium (V)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
WG1552509-9 MB								
Beryllium (Be)-Dissolved			<0.0050		mg/L		0.005	24-SEP-12
Bismuth (Bi)-Dissolved			<0.20		mg/L		0.2	24-SEP-12
Cobalt (Co)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Iron (Fe)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Lithium (Li)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Molybdenum (Mo)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Nickel (Ni)-Dissolved			<0.050		mg/L		0.05	24-SEP-12
Phosphorus (P)-Dissolved			<0.30		mg/L		0.3	24-SEP-12
Silicon (Si)-Dissolved			<0.050		mg/L		0.05	24-SEP-12
Silver (Ag)-Dissolved			<0.010		mg/L		0.01	24-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 17 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-ICP-VA	Water							
Batch R2442899								
WG1552509-9 MB								
Sodium (Na)-Dissolved			<2.0		mg/L		2	24-SEP-12
Strontium (Sr)-Dissolved			<0.0050		mg/L		0.005	24-SEP-12
Thallium (Tl)-Dissolved			<0.20		mg/L		0.2	24-SEP-12
Tin (Sn)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Titanium (Ti)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Vanadium (V)-Dissolved			<0.030		mg/L		0.03	24-SEP-12
Batch R2443052								
WG1548035-9 MS		L1209492-46						
Iron (Fe)-Dissolved			100.2		%		70-130	25-SEP-12
Sodium (Na)-Dissolved			101.8		%		70-130	25-SEP-12
Titanium (Ti)-Dissolved			109.3		%		70-130	25-SEP-12
Batch R2443115								
WG1548035-5 MS		L1209555-18						
Iron (Fe)-Dissolved			99.9		%		70-130	25-SEP-12
Sodium (Na)-Dissolved			114.6		%		70-130	25-SEP-12
Titanium (Ti)-Dissolved			112.7		%		70-130	25-SEP-12
WG1548035-7 MS		L1209555-29						
Iron (Fe)-Dissolved			101.7		%		70-130	25-SEP-12
Sodium (Na)-Dissolved			109.8		%		70-130	25-SEP-12
Titanium (Ti)-Dissolved			112.0		%		70-130	25-SEP-12
Batch R2443141								
WG1548035-15 MS		L1209537-4						
Iron (Fe)-Dissolved			96.5		%		70-130	23-SEP-12
Sodium (Na)-Dissolved			101.9		%		70-130	23-SEP-12
Titanium (Ti)-Dissolved			106.4		%		70-130	23-SEP-12
Batch R2443782								
WG1548035-13 MS		L1209540-7						
Iron (Fe)-Dissolved			87.8		%		70-130	25-SEP-12
Sodium (Na)-Dissolved			97.3		%		70-130	25-SEP-12
Titanium (Ti)-Dissolved			94.9		%		70-130	25-SEP-12
Batch R2444051								
WG1548035-33 MS		L1209581-2						
Iron (Fe)-Dissolved			100.4		%		70-130	24-SEP-12
Sodium (Na)-Dissolved			108.6		%		70-130	24-SEP-12
Titanium (Ti)-Dissolved			111.1		%		70-130	24-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 18 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-LOW-MS-VA		Water						
Batch R2438088								
WG1548035-1 MB								
Aluminum (Al)-Dissolved			<0.0030		mg/L		0.003	18-SEP-12
Antimony (Sb)-Dissolved			<0.00010		mg/L		0.0001	18-SEP-12
Arsenic (As)-Dissolved			<0.00010		mg/L		0.0001	18-SEP-12
Barium (Ba)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Boron (B)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Cadmium (Cd)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Calcium (Ca)-Dissolved			<0.020		mg/L		0.02	18-SEP-12
Chromium (Cr)-Dissolved			<0.00050		mg/L		0.0005	18-SEP-12
Copper (Cu)-Dissolved			<0.00050		mg/L		0.0005	18-SEP-12
Lead (Pb)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Magnesium (Mg)-Dissolved			<0.0050		mg/L		0.005	18-SEP-12
Manganese (Mn)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Potassium (K)-Dissolved			<0.050		mg/L		0.05	18-SEP-12
Selenium (Se)-Dissolved			<0.0010		mg/L		0.001	18-SEP-12
Uranium (U)-Dissolved			<0.000010		mg/L		0.00001	18-SEP-12
Zinc (Zn)-Dissolved			<0.0030		mg/L		0.003	18-SEP-12
Batch R2438189								
WG1548683-4 CRM		VA-HIGH-WATRM						
Aluminum (Al)-Dissolved			112.9		%		80-120	18-SEP-12
Antimony (Sb)-Dissolved			107.1		%		80-120	18-SEP-12
Arsenic (As)-Dissolved			112.9		%		80-120	18-SEP-12
Barium (Ba)-Dissolved			114.2		%		80-120	18-SEP-12
Cadmium (Cd)-Dissolved			113.0		%		80-120	18-SEP-12
Calcium (Ca)-Dissolved			108.0		%		80-120	18-SEP-12
Chromium (Cr)-Dissolved			111.6		%		80-120	18-SEP-12
Copper (Cu)-Dissolved			108.3		%		80-120	18-SEP-12
Lead (Pb)-Dissolved			107.6		%		80-120	18-SEP-12
Magnesium (Mg)-Dissolved			111.6		%		80-120	18-SEP-12
Manganese (Mn)-Dissolved			110.1		%		80-120	18-SEP-12
Potassium (K)-Dissolved			110.9		%		80-120	18-SEP-12
Selenium (Se)-Dissolved			101.4		%		80-120	18-SEP-12
Uranium (U)-Dissolved			104.0		%		80-120	18-SEP-12
Zinc (Zn)-Dissolved			102.4		%		80-120	18-SEP-12
WG1548683-7 MB								
Aluminum (Al)-Dissolved			<0.0030		mg/L		0.003	18-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 19 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-LOW-MS-VA		Water						
Batch R2438189								
WG1548683-7 MB								
Antimony (Sb)-Dissolved			<0.00010		mg/L		0.0001	18-SEP-12
Arsenic (As)-Dissolved			<0.00010		mg/L		0.0001	18-SEP-12
Barium (Ba)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Boron (B)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Cadmium (Cd)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Chromium (Cr)-Dissolved			<0.00050		mg/L		0.0005	18-SEP-12
Copper (Cu)-Dissolved			<0.00050		mg/L		0.0005	18-SEP-12
Lead (Pb)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Potassium (K)-Dissolved			<0.050		mg/L		0.05	18-SEP-12
Selenium (Se)-Dissolved			<0.0010		mg/L		0.001	18-SEP-12
Uranium (U)-Dissolved			<0.000010		mg/L		0.00001	18-SEP-12
Zinc (Zn)-Dissolved			<0.0030		mg/L		0.003	18-SEP-12
Batch R2438609								
WG1548683-1 MB								
Aluminum (Al)-Dissolved			<0.0030		mg/L		0.003	18-SEP-12
Antimony (Sb)-Dissolved			<0.00010		mg/L		0.0001	18-SEP-12
Arsenic (As)-Dissolved			<0.00010		mg/L		0.0001	18-SEP-12
Barium (Ba)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Boron (B)-Dissolved			<0.010		mg/L		0.01	18-SEP-12
Cadmium (Cd)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Calcium (Ca)-Dissolved			<0.020		mg/L		0.02	18-SEP-12
Chromium (Cr)-Dissolved			<0.00050		mg/L		0.0005	18-SEP-12
Copper (Cu)-Dissolved			<0.00050		mg/L		0.0005	18-SEP-12
Lead (Pb)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Magnesium (Mg)-Dissolved			<0.0050		mg/L		0.005	18-SEP-12
Manganese (Mn)-Dissolved			<0.000050		mg/L		0.00005	18-SEP-12
Potassium (K)-Dissolved			<0.050		mg/L		0.05	18-SEP-12
Selenium (Se)-Dissolved			<0.0010		mg/L		0.001	18-SEP-12
Uranium (U)-Dissolved			<0.000010		mg/L		0.00001	18-SEP-12
Zinc (Zn)-Dissolved			<0.0030		mg/L		0.003	18-SEP-12
Batch R2439752								
WG1548035-2 CRM		VA-HIGH-WATRM						
Aluminum (Al)-Dissolved			103.1		%		80-120	19-SEP-12
Antimony (Sb)-Dissolved			100.6		%		80-120	19-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 20 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-LOW-MS-VA		Water						
Batch	R2439752							
WG1548035-2 CRM		VA-HIGH-WATRM						
Arsenic (As)-Dissolved			103.3		%		80-120	19-SEP-12
Barium (Ba)-Dissolved			105.0		%		80-120	19-SEP-12
Boron (B)-Dissolved			108.1		%		80-120	19-SEP-12
Cadmium (Cd)-Dissolved			103.0		%		80-120	19-SEP-12
Calcium (Ca)-Dissolved			97.7		%		80-120	19-SEP-12
Chromium (Cr)-Dissolved			102.6		%		80-120	19-SEP-12
Copper (Cu)-Dissolved			97.1		%		80-120	19-SEP-12
Lead (Pb)-Dissolved			101.3		%		80-120	19-SEP-12
Magnesium (Mg)-Dissolved			99.2		%		80-120	19-SEP-12
Manganese (Mn)-Dissolved			101.8		%		80-120	19-SEP-12
Potassium (K)-Dissolved			99.6		%		80-120	19-SEP-12
Selenium (Se)-Dissolved			100.4		%		80-120	19-SEP-12
Uranium (U)-Dissolved			101.5		%		80-120	19-SEP-12
Zinc (Zn)-Dissolved			94.6		%		80-120	19-SEP-12
WG1548683-8 CRM		VA-HIGH-WATRM						
Aluminum (Al)-Dissolved			99.8		%		80-120	19-SEP-12
Antimony (Sb)-Dissolved			104.3		%		80-120	19-SEP-12
Arsenic (As)-Dissolved			100.7		%		80-120	19-SEP-12
Barium (Ba)-Dissolved			103.6		%		80-120	19-SEP-12
Boron (B)-Dissolved			110.7		%		80-120	19-SEP-12
Cadmium (Cd)-Dissolved			102.1		%		80-120	19-SEP-12
Calcium (Ca)-Dissolved			100.5		%		80-120	19-SEP-12
Chromium (Cr)-Dissolved			100.7		%		80-120	19-SEP-12
Copper (Cu)-Dissolved			96.1		%		80-120	19-SEP-12
Lead (Pb)-Dissolved			105.2		%		80-120	19-SEP-12
Magnesium (Mg)-Dissolved			98.2		%		80-120	19-SEP-12
Manganese (Mn)-Dissolved			101.9		%		80-120	19-SEP-12
Potassium (K)-Dissolved			97.7		%		80-120	19-SEP-12
Selenium (Se)-Dissolved			100.6		%		80-120	19-SEP-12
Uranium (U)-Dissolved			109.6		%		80-120	19-SEP-12
Zinc (Zn)-Dissolved			93.4		%		80-120	19-SEP-12
Batch	R2440035							
WG1548683-7 MB								
Calcium (Ca)-Dissolved			<0.020		mg/L		0.02	20-SEP-12
Magnesium (Mg)-Dissolved			<0.0050		mg/L		0.005	20-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 21 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-LOW-MS-VA Water								
Batch R2440035								
WG1548683-7 MB								
Manganese (Mn)-Dissolved			0.000077	MB-LOR	mg/L		0.00005	20-SEP-12
Batch R2441054								
WG1548035-18 DUP								
		L1209363-2						
Aluminum (Al)-Dissolved		<0.050	<0.015	RPD-NA	mg/L	N/A	20	20-SEP-12
Antimony (Sb)-Dissolved		<0.0025	0.00061		mg/L	1.2	20	20-SEP-12
Arsenic (As)-Dissolved		0.00855	0.00861		mg/L	0.7	20	20-SEP-12
Barium (Ba)-Dissolved		<0.10	0.0123		mg/L	0.3	20	20-SEP-12
Boron (B)-Dissolved		<0.50	<0.050	RPD-NA	mg/L	N/A	20	20-SEP-12
Cadmium (Cd)-Dissolved		<0.0010	<0.00025	RPD-NA	mg/L	N/A	20	20-SEP-12
Calcium (Ca)-Dissolved		213	213		mg/L	0.0	20	20-SEP-12
Chromium (Cr)-Dissolved		<0.010	<0.0025	RPD-NA	mg/L	N/A	20	20-SEP-12
Copper (Cu)-Dissolved		<0.0050	<0.0025	RPD-NA	mg/L	N/A	20	20-SEP-12
Lead (Pb)-Dissolved		<0.0025	<0.00025	RPD-NA	mg/L	N/A	20	20-SEP-12
Magnesium (Mg)-Dissolved		477	482		mg/L	1.2	20	20-SEP-12
Manganese (Mn)-Dissolved		0.377	0.385		mg/L	2.1	20	20-SEP-12
Potassium (K)-Dissolved		28.2	28.9		mg/L	2.3	20	20-SEP-12
Selenium (Se)-Dissolved		<0.0050	<0.0050	RPD-NA	mg/L	N/A	20	20-SEP-12
Uranium (U)-Dissolved		0.00731	0.00741		mg/L	1.4	20	20-SEP-12
Zinc (Zn)-Dissolved		<0.25	<0.015	RPD-NA	mg/L	N/A	20	20-SEP-12
WG1548035-19 MS								
		L1209363-3						
Aluminum (Al)-Dissolved			91.6		%		70-130	20-SEP-12
Arsenic (As)-Dissolved			112.8		%		70-130	20-SEP-12
Cadmium (Cd)-Dissolved			93.0		%		70-130	20-SEP-12
Calcium (Ca)-Dissolved			N/A	MS-B	%		-	20-SEP-12
Chromium (Cr)-Dissolved			94.6		%		70-130	20-SEP-12
Copper (Cu)-Dissolved			87.6		%		70-130	20-SEP-12
Lead (Pb)-Dissolved			101.2		%		70-130	20-SEP-12
Magnesium (Mg)-Dissolved			N/A	MS-B	%		-	20-SEP-12
Manganese (Mn)-Dissolved			N/A	MS-B	%		-	20-SEP-12
Potassium (K)-Dissolved			N/A	MS-B	%		-	20-SEP-12
Uranium (U)-Dissolved			N/A	MS-B	%		-	20-SEP-12
Zinc (Zn)-Dissolved			80.7		%		70-130	20-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 22 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-LOW-MS-VA								
Batch R2442159								
WG1552509-8 MB								
Aluminum (Al)-Dissolved	Water		<0.0030		mg/L		0.003	24-SEP-12
Antimony (Sb)-Dissolved			<0.00010		mg/L		0.0001	24-SEP-12
Arsenic (As)-Dissolved			<0.00010		mg/L		0.0001	24-SEP-12
Barium (Ba)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Boron (B)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Cadmium (Cd)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Calcium (Ca)-Dissolved			<0.020		mg/L		0.02	24-SEP-12
Chromium (Cr)-Dissolved			<0.00050		mg/L		0.0005	24-SEP-12
Copper (Cu)-Dissolved			<0.00050		mg/L		0.0005	24-SEP-12
Lead (Pb)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Magnesium (Mg)-Dissolved			<0.0050		mg/L		0.005	24-SEP-12
Manganese (Mn)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Potassium (K)-Dissolved			<0.050		mg/L		0.05	24-SEP-12
Selenium (Se)-Dissolved			<0.0010		mg/L		0.001	24-SEP-12
Uranium (U)-Dissolved			<0.000010		mg/L		0.00001	24-SEP-12
Zinc (Zn)-Dissolved			<0.0030		mg/L		0.003	24-SEP-12
WG1548035-19 MS		L1209363-3						
Antimony (Sb)-Dissolved			126.6		%		70-130	24-SEP-12
Boron (B)-Dissolved			127.0		%		70-130	24-SEP-12
Batch R2442738								
WG1552509-1 MB								
Aluminum (Al)-Dissolved			<0.0030		mg/L		0.003	24-SEP-12
Antimony (Sb)-Dissolved			<0.00010		mg/L		0.0001	24-SEP-12
Arsenic (As)-Dissolved			<0.00010		mg/L		0.0001	24-SEP-12
Barium (Ba)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Boron (B)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Cadmium (Cd)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Calcium (Ca)-Dissolved			<0.020		mg/L		0.02	24-SEP-12
Chromium (Cr)-Dissolved			<0.00050		mg/L		0.0005	24-SEP-12
Copper (Cu)-Dissolved			<0.00050		mg/L		0.0005	24-SEP-12
Lead (Pb)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Magnesium (Mg)-Dissolved			<0.0050		mg/L		0.005	24-SEP-12
Manganese (Mn)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Potassium (K)-Dissolved			<0.050		mg/L		0.05	24-SEP-12
Selenium (Se)-Dissolved			<0.0010		mg/L		0.001	24-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 23 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-LOW-MS-VA		Water						
Batch	R2442738							
WG1552509-1 MB								
Uranium (U)-Dissolved			<0.000010		mg/L		0.00001	24-SEP-12
Zinc (Zn)-Dissolved			<0.0030		mg/L		0.003	24-SEP-12
WG1552509-9 MB								
Aluminum (Al)-Dissolved			<0.0030		mg/L		0.003	24-SEP-12
Antimony (Sb)-Dissolved			<0.00010		mg/L		0.0001	24-SEP-12
Arsenic (As)-Dissolved			<0.00010		mg/L		0.0001	24-SEP-12
Barium (Ba)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Boron (B)-Dissolved			<0.010		mg/L		0.01	24-SEP-12
Cadmium (Cd)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Calcium (Ca)-Dissolved			<0.020		mg/L		0.02	24-SEP-12
Chromium (Cr)-Dissolved			<0.00050		mg/L		0.0005	24-SEP-12
Copper (Cu)-Dissolved			<0.00050		mg/L		0.0005	24-SEP-12
Lead (Pb)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Magnesium (Mg)-Dissolved			<0.0050		mg/L		0.005	24-SEP-12
Manganese (Mn)-Dissolved			<0.000050		mg/L		0.00005	24-SEP-12
Potassium (K)-Dissolved			<0.050		mg/L		0.05	24-SEP-12
Selenium (Se)-Dissolved			<0.0010		mg/L		0.001	24-SEP-12
Uranium (U)-Dissolved			<0.000010		mg/L		0.00001	24-SEP-12
Zinc (Zn)-Dissolved			<0.0030		mg/L		0.003	24-SEP-12
Batch	R2443662							
WG1552509-10 CRM		VA-HIGH-WATRM						
Aluminum (Al)-Dissolved			104.6		%		80-120	25-SEP-12
Antimony (Sb)-Dissolved			106.7		%		80-120	25-SEP-12
Arsenic (As)-Dissolved			102.2		%		80-120	25-SEP-12
Barium (Ba)-Dissolved			102.5		%		80-120	25-SEP-12
Boron (B)-Dissolved			91.1		%		80-120	25-SEP-12
Cadmium (Cd)-Dissolved			103.9		%		80-120	25-SEP-12
Calcium (Ca)-Dissolved			99.3		%		80-120	25-SEP-12
Chromium (Cr)-Dissolved			100.1		%		80-120	25-SEP-12
Copper (Cu)-Dissolved			98.5		%		80-120	25-SEP-12
Lead (Pb)-Dissolved			102.2		%		80-120	25-SEP-12
Magnesium (Mg)-Dissolved			101.5		%		80-120	25-SEP-12
Manganese (Mn)-Dissolved			102.0		%		80-120	25-SEP-12
Potassium (K)-Dissolved			102.0		%		80-120	25-SEP-12
Selenium (Se)-Dissolved			102.5		%		80-120	25-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 24 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-LOW-MS-VA	Water							
Batch	R2443662							
WG1552509-10 CRM		VA-HIGH-WATRM						
Uranium (U)-Dissolved			103.1		%		80-120	25-SEP-12
Zinc (Zn)-Dissolved			97.0		%		80-120	25-SEP-12
WG1552509-11 CRM		VA-HIGH-WATRM						
Aluminum (Al)-Dissolved			104.9		%		80-120	25-SEP-12
Antimony (Sb)-Dissolved			106.5		%		80-120	25-SEP-12
Arsenic (As)-Dissolved			101.2		%		80-120	25-SEP-12
Barium (Ba)-Dissolved			101.0		%		80-120	25-SEP-12
Boron (B)-Dissolved			91.4		%		80-120	25-SEP-12
Cadmium (Cd)-Dissolved			102.0		%		80-120	25-SEP-12
Calcium (Ca)-Dissolved			99.7		%		80-120	25-SEP-12
Chromium (Cr)-Dissolved			102.1		%		80-120	25-SEP-12
Copper (Cu)-Dissolved			98.5		%		80-120	25-SEP-12
Lead (Pb)-Dissolved			97.8		%		80-120	25-SEP-12
Magnesium (Mg)-Dissolved			105.0		%		80-120	25-SEP-12
Manganese (Mn)-Dissolved			102.5		%		80-120	25-SEP-12
Potassium (K)-Dissolved			101.3		%		80-120	25-SEP-12
Selenium (Se)-Dissolved			99.6		%		80-120	25-SEP-12
Uranium (U)-Dissolved			99.7		%		80-120	25-SEP-12
Zinc (Zn)-Dissolved			97.3		%		80-120	25-SEP-12
WG1552509-5 CRM		VA-HIGH-WATRM						
Aluminum (Al)-Dissolved			106.5		%		80-120	25-SEP-12
Antimony (Sb)-Dissolved			105.9		%		80-120	25-SEP-12
Arsenic (As)-Dissolved			102.8		%		80-120	25-SEP-12
Barium (Ba)-Dissolved			102.5		%		80-120	25-SEP-12
Boron (B)-Dissolved			93.2		%		80-120	25-SEP-12
Cadmium (Cd)-Dissolved			103.4		%		80-120	25-SEP-12
Calcium (Ca)-Dissolved			101.6		%		80-120	25-SEP-12
Chromium (Cr)-Dissolved			101.2		%		80-120	25-SEP-12
Copper (Cu)-Dissolved			99.2		%		80-120	25-SEP-12
Lead (Pb)-Dissolved			103.4		%		80-120	25-SEP-12
Magnesium (Mg)-Dissolved			103.1		%		80-120	25-SEP-12
Manganese (Mn)-Dissolved			101.9		%		80-120	25-SEP-12
Potassium (K)-Dissolved			103.2		%		80-120	25-SEP-12
Selenium (Se)-Dissolved			101.3		%		80-120	25-SEP-12
Uranium (U)-Dissolved			103.8		%		80-120	25-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 25 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
MET-DIS-LOW-MS-VA	Water							
Batch R2443662								
WG1552509-5 CRM		VA-HIGH-WATRM						
Zinc (Zn)-Dissolved			98.7		%		80-120	25-SEP-12
NH3-F-VA	Water							
Batch R2441464								
WG1551682-10 CRM		VA-NH3-F						
Ammonia, Total (as N)			94.4		%		85-115	23-SEP-12
WG1551682-2 CRM		VA-NH3-F						
Ammonia, Total (as N)			101.4		%		85-115	23-SEP-12
WG1551682-4 CRM		VA-NH3-F						
Ammonia, Total (as N)			98.9		%		85-115	23-SEP-12
WG1551682-6 CRM		VA-NH3-F						
Ammonia, Total (as N)			93.4		%		85-115	23-SEP-12
WG1551682-8 CRM		VA-NH3-F						
Ammonia, Total (as N)			93.7		%		85-115	23-SEP-12
WG1551682-1 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	23-SEP-12
WG1551682-3 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	23-SEP-12
WG1551682-5 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	23-SEP-12
WG1551682-7 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	23-SEP-12
WG1551682-9 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	23-SEP-12
WG1551682-12 MS		L1209742-2						
Ammonia, Total (as N)			95.1		%		75-125	23-SEP-12
Batch R2442196								
WG1552459-10 CRM		VA-NH3-F						
Ammonia, Total (as N)			86.6		%		85-115	24-SEP-12
WG1552459-2 CRM		VA-NH3-F						
Ammonia, Total (as N)			101.0		%		85-115	24-SEP-12
WG1552459-4 CRM		VA-NH3-F						
Ammonia, Total (as N)			93.1		%		85-115	24-SEP-12
WG1552459-6 CRM		VA-NH3-F						
Ammonia, Total (as N)			95.5		%		85-115	24-SEP-12
WG1552459-8 CRM		VA-NH3-F						
Ammonia, Total (as N)			95.6		%		85-115	24-SEP-12
WG1552459-1 MB								

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 26 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
NH3-F-VA								
Water								
Batch	R2442196							
WG1552459-1 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	24-SEP-12
WG1552459-3 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	24-SEP-12
WG1552459-5 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	24-SEP-12
WG1552459-7 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	24-SEP-12
WG1552459-9 MB								
Ammonia, Total (as N)			<0.0050		mg/L		0.005	24-SEP-12
WG1552459-12 MS		L1209462-7						
Ammonia, Total (as N)			95.5		%		75-125	24-SEP-12
PAH-SF-MS-VA								
Water								
Batch	R2438644							
WG1549364-2 LCS								
Acenaphthene			105.0		%		60-130	20-SEP-12
Acenaphthylene			104.9		%		60-130	20-SEP-12
Acridine			101.3		%		60-130	20-SEP-12
Anthracene			107.2		%		60-130	20-SEP-12
Benz(a)anthracene			101.2		%		60-130	20-SEP-12
Benzo(a)pyrene			100.3		%		60-130	20-SEP-12
Benzo(b)fluoranthene			94.7		%		60-130	20-SEP-12
Benzo(g,h,i)perylene			90.0		%		60-130	20-SEP-12
Benzo(k)fluoranthene			93.4		%		60-130	20-SEP-12
Chrysene			102.6		%		60-130	20-SEP-12
Dibenz(a,h)anthracene			98.9		%		60-130	20-SEP-12
Fluoranthene			105.4		%		60-130	20-SEP-12
Fluorene			102.7		%		60-130	20-SEP-12
Indeno(1,2,3-c,d)pyrene			104.2		%		60-130	20-SEP-12
Naphthalene			102.0		%		50-130	20-SEP-12
Phenanthrene			110.2		%		60-130	20-SEP-12
Pyrene			104.7		%		60-130	20-SEP-12
Quinoline			99.4		%		60-130	20-SEP-12
WG1549364-1 MB								
Acenaphthene			<0.000050		mg/L		0.00005	20-SEP-12
Acenaphthylene			<0.000050		mg/L		0.00005	20-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 27 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
PAH-SF-MS-VA		Water						
Batch R2438644								
WG1549364-1 MB								
Acridine			<0.000050		mg/L		0.00005	20-SEP-12
Anthracene			<0.000050		mg/L		0.00005	20-SEP-12
Benz(a)anthracene			<0.000050		mg/L		0.00005	20-SEP-12
Benzo(a)pyrene			<0.000010		mg/L		0.00001	20-SEP-12
Benzo(b)fluoranthene			<0.000050		mg/L		0.00005	20-SEP-12
Benzo(g,h,i)perylene			<0.000050		mg/L		0.00005	20-SEP-12
Benzo(k)fluoranthene			<0.000050		mg/L		0.00005	20-SEP-12
Chrysene			<0.000050		mg/L		0.00005	20-SEP-12
Dibenz(a,h)anthracene			<0.000050		mg/L		0.00005	20-SEP-12
Fluoranthene			<0.000050		mg/L		0.00005	20-SEP-12
Fluorene			<0.000050		mg/L		0.00005	20-SEP-12
Indeno(1,2,3-c,d)pyrene			<0.000050		mg/L		0.00005	20-SEP-12
Naphthalene			<0.000050		mg/L		0.00005	20-SEP-12
Phenanthrene			<0.000050		mg/L		0.00005	20-SEP-12
Pyrene			<0.000050		mg/L		0.00005	20-SEP-12
Quinoline			<0.000050		mg/L		0.00005	20-SEP-12
WG1549364-3 MB								
Acenaphthene			<0.000050		mg/L		0.00005	20-SEP-12
Acenaphthylene			<0.000050		mg/L		0.00005	20-SEP-12
Acridine			<0.000050		mg/L		0.00005	20-SEP-12
Anthracene			<0.000050		mg/L		0.00005	20-SEP-12
Benz(a)anthracene			<0.000050		mg/L		0.00005	20-SEP-12
Benzo(a)pyrene			<0.000010		mg/L		0.00001	20-SEP-12
Benzo(b)fluoranthene			<0.000050		mg/L		0.00005	20-SEP-12
Benzo(g,h,i)perylene			<0.000050		mg/L		0.00005	20-SEP-12
Benzo(k)fluoranthene			<0.000050		mg/L		0.00005	20-SEP-12
Chrysene			<0.000050		mg/L		0.00005	20-SEP-12
Dibenz(a,h)anthracene			<0.000050		mg/L		0.00005	20-SEP-12
Fluoranthene			<0.000050		mg/L		0.00005	20-SEP-12
Fluorene			<0.000050		mg/L		0.00005	20-SEP-12
Indeno(1,2,3-c,d)pyrene			<0.000050		mg/L		0.00005	20-SEP-12
Naphthalene			<0.000050		mg/L		0.00005	20-SEP-12
Phenanthrene			<0.000050		mg/L		0.00005	20-SEP-12
Pyrene			<0.000050		mg/L		0.00005	20-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 28 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
PAH-SF-MS-VA		Water						
Batch R2438644								
WG1549364-3 MB								
Quinoline			<0.000050		mg/L		0.00005	20-SEP-12
Batch R2439714								
WG1550411-2 LCS								
Acenaphthene			91.8		%		60-130	21-SEP-12
Acenaphthylene			88.5		%		60-130	21-SEP-12
Acridine			90.0		%		60-130	21-SEP-12
Anthracene			95.8		%		60-130	21-SEP-12
Benz(a)anthracene			86.4		%		60-130	21-SEP-12
Benzo(a)pyrene			76.7		%		60-130	21-SEP-12
Benzo(b)fluoranthene			89.5		%		60-130	21-SEP-12
Benzo(g,h,i)perylene			91.9		%		60-130	21-SEP-12
Benzo(k)fluoranthene			99.4		%		60-130	21-SEP-12
Chrysene			92.6		%		60-130	21-SEP-12
Dibenz(a,h)anthracene			94.7		%		60-130	21-SEP-12
Fluoranthene			93.1		%		60-130	21-SEP-12
Fluorene			90.6		%		60-130	21-SEP-12
Indeno(1,2,3-c,d)pyrene			88.3		%		60-130	21-SEP-12
Naphthalene			86.2		%		50-130	21-SEP-12
Phenanthrene			89.2		%		60-130	21-SEP-12
Pyrene			93.5		%		60-130	21-SEP-12
Quinoline			83.5		%		60-130	21-SEP-12
WG1550411-1 MB								
Acenaphthene			<0.000050		mg/L		0.00005	21-SEP-12
Acenaphthylene			<0.000050		mg/L		0.00005	21-SEP-12
Acridine			<0.000050		mg/L		0.00005	21-SEP-12
Anthracene			<0.000050		mg/L		0.00005	21-SEP-12
Benz(a)anthracene			<0.000050		mg/L		0.00005	21-SEP-12
Benzo(a)pyrene			<0.000010		mg/L		0.00001	21-SEP-12
Benzo(b)fluoranthene			<0.000050		mg/L		0.00005	21-SEP-12
Benzo(g,h,i)perylene			<0.000050		mg/L		0.00005	21-SEP-12
Benzo(k)fluoranthene			<0.000050		mg/L		0.00005	21-SEP-12
Chrysene			<0.000050		mg/L		0.00005	21-SEP-12
Dibenz(a,h)anthracene			<0.000050		mg/L		0.00005	21-SEP-12
Fluoranthene			<0.000050		mg/L		0.00005	21-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 29 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
PAH-SF-MS-VA		Water						
Batch R2439714								
WG1550411-1 MB								
Fluorene			<0.000050		mg/L		0.00005	21-SEP-12
Indeno(1,2,3-c,d)pyrene			<0.000050		mg/L		0.00005	21-SEP-12
Naphthalene			<0.000050		mg/L		0.00005	21-SEP-12
Phenanthrene			<0.000050		mg/L		0.00005	21-SEP-12
Pyrene			<0.000050		mg/L		0.00005	21-SEP-12
Quinoline			<0.000050		mg/L		0.00005	21-SEP-12
Batch R2440768								
WG1550411-3 MB								
Acenaphthene			<0.000050		mg/L		0.00005	21-SEP-12
Acenaphthylene			<0.000050		mg/L		0.00005	21-SEP-12
Acridine			<0.000050		mg/L		0.00005	21-SEP-12
Anthracene			<0.000050		mg/L		0.00005	21-SEP-12
Benz(a)anthracene			<0.000050		mg/L		0.00005	21-SEP-12
Benzo(a)pyrene			<0.000010		mg/L		0.00001	21-SEP-12
Benzo(b)fluoranthene			<0.000050		mg/L		0.00005	21-SEP-12
Benzo(g,h,i)perylene			<0.000050		mg/L		0.00005	21-SEP-12
Benzo(k)fluoranthene			<0.000050		mg/L		0.00005	21-SEP-12
Chrysene			<0.000050		mg/L		0.00005	21-SEP-12
Dibenz(a,h)anthracene			<0.000050		mg/L		0.00005	21-SEP-12
Fluoranthene			<0.000050		mg/L		0.00005	21-SEP-12
Fluorene			<0.000050		mg/L		0.00005	21-SEP-12
Indeno(1,2,3-c,d)pyrene			<0.000050		mg/L		0.00005	21-SEP-12
Naphthalene			<0.000050		mg/L		0.00005	21-SEP-12
Phenanthrene			<0.000050		mg/L		0.00005	21-SEP-12
Pyrene			<0.000050		mg/L		0.00005	21-SEP-12
Quinoline			<0.000050		mg/L		0.00005	21-SEP-12
PH-PCT-VA		Water						
Batch R2443112								
WG1553049-24 CRM		VA-PH7-BUF						
pH			7.03		pH		6.9-7.1	25-SEP-12
WG1553049-25 CRM		VA-PH7-BUF						
pH			7.03		pH		6.9-7.1	25-SEP-12
WG1553049-26 CRM		VA-PH7-BUF						
pH			7.03		pH		6.9-7.1	25-SEP-12
WG1553049-27 CRM		VA-PH7-BUF						

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 30 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
PH-PCT-VA								
Water								
Batch	R2443112							
WG1553049-27 CRM		VA-PH7-BUF						
pH			7.02		pH		6.9-7.1	25-SEP-12
WG1553049-28 CRM		VA-PH7-BUF						
pH			7.02		pH		6.9-7.1	25-SEP-12
WG1553049-29 CRM		VA-PH7-BUF						
pH			7.01		pH		6.9-7.1	25-SEP-12
WG1553049-30 CRM		VA-PH7-BUF						
pH			7.01		pH		6.9-7.1	25-SEP-12
TDS-VA								
Water								
Batch	R2439701							
WG1548151-3 DUP		L1209363-1						
Total Dissolved Solids		8890	8750		mg/L	1.6	20	18-SEP-12
WG1548151-11 LCS								
Total Dissolved Solids			99.2		%		85-115	18-SEP-12
WG1548151-2 LCS								
Total Dissolved Solids			100.4		%		85-115	18-SEP-12
WG1548151-5 LCS								
Total Dissolved Solids			97.8		%		85-115	18-SEP-12
WG1548151-8 LCS								
Total Dissolved Solids			97.6		%		85-115	18-SEP-12
WG1548151-1 MB								
Total Dissolved Solids			<10		mg/L		10	18-SEP-12
WG1548151-10 MB								
Total Dissolved Solids			<10		mg/L		10	18-SEP-12
WG1548151-4 MB								
Total Dissolved Solids			<10		mg/L		10	18-SEP-12
WG1548151-7 MB								
Total Dissolved Solids			<10		mg/L		10	18-SEP-12
TKN-F-VA								
Water								
Batch	R2441463							
WG1549655-6 DUP		L1209363-15						
Total Kjeldahl Nitrogen		0.572	0.556		mg/L	2.8	20	23-SEP-12
WG1549655-2 LCS								
Total Kjeldahl Nitrogen			104.2		%		75-125	23-SEP-12
WG1549655-5 LCS								
Total Kjeldahl Nitrogen			112.2		%		75-125	23-SEP-12
WG1549655-1 MB								
Total Kjeldahl Nitrogen			<0.050		mg/L		0.05	23-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 31 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
TKN-F-VA		Water						
Batch R2441463								
WG1549655-4 MB								
Total Kjeldahl Nitrogen			<0.050		mg/L		0.05	23-SEP-12
Batch R2442141								
WG1550523-2 LCS								
Total Kjeldahl Nitrogen			93.5		%		75-125	24-SEP-12
WG1550523-1 MB								
Total Kjeldahl Nitrogen			<0.050		mg/L		0.05	24-SEP-12
Batch R2443047								
WG1550523-5 LCS								
Total Kjeldahl Nitrogen			98.2		%		75-125	24-SEP-12
WG1550523-4 MB								
Total Kjeldahl Nitrogen			<0.050		mg/L		0.05	24-SEP-12
VH-HSFID-VA		Water						
Batch R2441333								
WG1550775-3 DUP		L1209363-17						
Volatile Hydrocarbons (VH6-10)		<0.10	<0.10	RPD-NA	mg/L	N/A	50	22-SEP-12
WG1550775-2 LCS								
Volatile Hydrocarbons (VH6-10)			85.2		%		70-130	22-SEP-12
WG1550775-1 MB								
Volatile Hydrocarbons (VH6-10)			<0.10		mg/L		0.1	22-SEP-12
VOC-HSMS-VA		Water						
Batch R2443281								
WG1554616-2 LCS								
Bromodichloromethane			93.9		%		70-130	26-SEP-12
Bromoform			93.6		%		70-130	26-SEP-12
Carbon Tetrachloride			103.1		%		70-130	26-SEP-12
Chlorobenzene			98.5		%		70-130	26-SEP-12
Dibromochloromethane			93.9		%		70-130	26-SEP-12
Chloroethane			95.8		%		60-140	26-SEP-12
Chloroform			94.2		%		70-130	26-SEP-12
Chloromethane			96.7		%		60-140	26-SEP-12
1,2-Dichlorobenzene			99.6		%		70-130	26-SEP-12
1,3-Dichlorobenzene			103.1		%		70-130	26-SEP-12
1,4-Dichlorobenzene			100.8		%		70-130	26-SEP-12
1,1-Dichloroethane			90.6		%		70-130	26-SEP-12
1,2-Dichloroethane			85.3		%		70-130	26-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 32 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
VOC-HSMS-VA		Water						
Batch	R2443281							
WG1554616-2	LCS							
1,1-Dichloroethylene			80.5		%		70-130	26-SEP-12
cis-1,2-Dichloroethylene			95.2		%		70-130	26-SEP-12
trans-1,2-Dichloroethylene			88.8		%		70-130	26-SEP-12
Dichloromethane			86.3		%		60-140	26-SEP-12
1,2-Dichloropropane			90.6		%		70-130	26-SEP-12
cis-1,3-Dichloropropylene			88.1		%		70-130	26-SEP-12
trans-1,3-Dichloropropylene			88.0		%		70-130	26-SEP-12
1,1,1,2-Tetrachloroethane			100.7		%		70-130	26-SEP-12
1,1,2,2-Tetrachloroethane			84.9		%		70-130	26-SEP-12
Tetrachloroethylene			106.3		%		70-130	26-SEP-12
1,1,1-Trichloroethane			100.2		%		70-130	26-SEP-12
1,1,2-Trichloroethane			89.1		%		70-130	26-SEP-12
Trichloroethylene			101.7		%		70-130	26-SEP-12
Trichlorofluoromethane			111.4		%		60-140	26-SEP-12
Vinyl Chloride			99.8		%		60-140	26-SEP-12
WG1554616-1	MB							
Bromodichloromethane			<0.0010		mg/L		0.001	26-SEP-12
Bromoform			<0.0010		mg/L		0.001	26-SEP-12
Carbon Tetrachloride			<0.00050		mg/L		0.0005	26-SEP-12
Chlorobenzene			<0.0010		mg/L		0.001	26-SEP-12
Dibromochloromethane			<0.0010		mg/L		0.001	26-SEP-12
Chloroethane			<0.0010		mg/L		0.001	26-SEP-12
Chloroform			<0.0010		mg/L		0.001	26-SEP-12
Chloromethane			<0.0050		mg/L		0.005	26-SEP-12
1,2-Dichlorobenzene			<0.00070		mg/L		0.0007	26-SEP-12
1,3-Dichlorobenzene			<0.0010		mg/L		0.001	26-SEP-12
1,4-Dichlorobenzene			<0.0010		mg/L		0.001	26-SEP-12
1,1-Dichloroethane			<0.0010		mg/L		0.001	26-SEP-12
1,2-Dichloroethane			<0.0010		mg/L		0.001	26-SEP-12
1,1-Dichloroethylene			<0.0010		mg/L		0.001	26-SEP-12
cis-1,2-Dichloroethylene			<0.0010		mg/L		0.001	26-SEP-12
trans-1,2-Dichloroethylene			<0.0010		mg/L		0.001	26-SEP-12
Dichloromethane			<0.0050		mg/L		0.005	26-SEP-12
1,2-Dichloropropane			<0.0010		mg/L		0.001	26-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 33 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
VOC-HSMS-VA		Water						
Batch R2443281								
WG1554616-1 MB								
cis-1,3-Dichloropropylene			<0.0010		mg/L		0.001	26-SEP-12
trans-1,3-Dichloropropylene			<0.0010		mg/L		0.001	26-SEP-12
1,1,1,2-Tetrachloroethane			<0.0010		mg/L		0.001	26-SEP-12
1,1,2,2-Tetrachloroethane			<0.0010		mg/L		0.001	26-SEP-12
Tetrachloroethylene			<0.0010		mg/L		0.001	26-SEP-12
1,1,1-Trichloroethane			<0.0010		mg/L		0.001	26-SEP-12
1,1,2-Trichloroethane			<0.0010		mg/L		0.001	26-SEP-12
Trichloroethylene			<0.0010		mg/L		0.001	26-SEP-12
Trichlorofluoromethane			<0.0010		mg/L		0.001	26-SEP-12
Vinyl Chloride			<0.0010		mg/L		0.001	26-SEP-12
VOC7-HSMS-VA		Water						
Batch R2441066								
WG1550775-3 DUP		L1209363-17						
Benzene		<0.00050	<0.00050	RPD-NA	mg/L	N/A	30	23-SEP-12
Ethylbenzene		<0.00050	<0.00050	RPD-NA	mg/L	N/A	30	23-SEP-12
Methyl t-butyl ether (MTBE)		<0.00050	<0.00050	RPD-NA	mg/L	N/A	30	23-SEP-12
Styrene		<0.00050	<0.00050	RPD-NA	mg/L	N/A	30	23-SEP-12
Toluene		<0.00050	<0.00050	RPD-NA	mg/L	N/A	30	23-SEP-12
meta- & para-Xylene		<0.00050	<0.00050	RPD-NA	mg/L	N/A	30	23-SEP-12
ortho-Xylene		<0.00050	<0.00050	RPD-NA	mg/L	N/A	30	23-SEP-12
WG1550775-2 LCS								
Benzene			101.5		%		70-130	22-SEP-12
Ethylbenzene			106.6		%		70-130	22-SEP-12
Methyl t-butyl ether (MTBE)			103.4		%		70-130	22-SEP-12
Styrene			98.7		%		70-130	22-SEP-12
Toluene			101.6		%		70-130	22-SEP-12
meta- & para-Xylene			103.3		%		70-130	22-SEP-12
ortho-Xylene			104.7		%		70-130	22-SEP-12
WG1550775-1 MB								
Benzene			<0.00050		mg/L		0.0005	22-SEP-12
Ethylbenzene			<0.00050		mg/L		0.0005	22-SEP-12
Methyl t-butyl ether (MTBE)			<0.00050		mg/L		0.0005	22-SEP-12
Styrene			<0.00050		mg/L		0.0005	22-SEP-12
Toluene			<0.00050		mg/L		0.0005	22-SEP-12
meta- & para-Xylene			<0.00050		mg/L		0.0005	22-SEP-12



Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 34 of 37

Test	Matrix	Reference	Result	Qualifier	Units	RPD	Limit	Analyzed
VOC7-HSMS-VA	Water							
Batch	R2441066							
WG1550775-1	MB							
ortho-Xylene			<0.00050		mg/L		0.0005	22-SEP-12

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 35 of 37

Legend:

Limit	ALS Control Limit (Data Quality Objectives)
DUP	Duplicate
RPD	Relative Percent Difference
N/A	Not Available
LCS	Laboratory Control Sample
SRM	Standard Reference Material
MS	Matrix Spike
MSD	Matrix Spike Duplicate
ADE	Average Desorption Efficiency
MB	Method Blank
IRM	Internal Reference Material
CRM	Certified Reference Material
CCV	Continuing Calibration Verification
CVS	Calibration Verification Standard
LCSD	Laboratory Control Sample Duplicate

Sample Parameter Qualifier Definitions:

Qualifier	Description
J	Duplicate results and limits are expressed in terms of absolute difference.
MB-LOR	Method Blank exceeds ALS DQO. LORs adjusted for samples with positive hits below 5 times blank level. Please contact ALS if re-analysis is required.
MS-B	Matrix Spike recovery could not be accurately calculated due to high analyte background in sample.
RPD-NA	Relative Percent Difference Not Available due to result(s) being less than detection limit.

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 36 of 37

Hold Time Exceedances:

ALS Product Description	Sample ID	Sampling Date	Date Processed	Rec. HT	Actual HT	Units	Qualifier
Physical Tests							
Total Dissolved Solids by Gravimetric							
	1	09-SEP-12 15:40	18-SEP-12 00:00	7	8	days	EHT
	2	10-SEP-12 10:20	18-SEP-12 00:00	7	8	days	EHT
	3	10-SEP-12 11:30	18-SEP-12 00:00	7	8	days	EHT
pH by Meter (Automated)							
	1	09-SEP-12 15:40	25-SEP-12 11:16	0.25	380	hours	EHTR-FM
	2	10-SEP-12 10:20	25-SEP-12 11:16	0.25	361	hours	EHTR-FM
	3	10-SEP-12 11:30	25-SEP-12 11:16	0.25	360	hours	EHTR-FM
	4	13-SEP-12 13:30	25-SEP-12 11:16	0.25	286	hours	EHTR-FM
	5	12-SEP-12 10:40	25-SEP-12 11:16	0.25	313	hours	EHTR-FM
	6	10-SEP-12 16:30	25-SEP-12 11:16	0.25	355	hours	EHTR-FM
	7	10-SEP-12 17:45	25-SEP-12 11:16	0.25	354	hours	EHTR-FM
	8	10-SEP-12 16:30	25-SEP-12 11:16	0.25	355	hours	EHTR-FM
	9	12-SEP-12 13:20	25-SEP-12 11:16	0.25	310	hours	EHTR-FM
	10	11-SEP-12 10:45	25-SEP-12 11:16	0.25	336	hours	EHTR-FM
	11	11-SEP-12 12:30	25-SEP-12 11:16	0.25	335	hours	EHTR-FM
	12	11-SEP-12 14:15	25-SEP-12 11:16	0.25	333	hours	EHTR-FM
	13	11-SEP-12 15:15	25-SEP-12 11:16	0.25	332	hours	EHTR-FM
	14	12-SEP-12 17:30	25-SEP-12 11:16	0.25	306	hours	EHTR-FM
	15	13-SEP-12 09:25	25-SEP-12 11:16	0.25	290	hours	EHTR-FM
	16	13-SEP-12 09:55	25-SEP-12 11:16	0.25	289	hours	EHTR-FM
	17	11-SEP-12 19:15	25-SEP-12 11:16	0.25	328	hours	EHTR-FM
Anions and Nutrients							
Nitrate Nitrogen by Ion Chromatography							
	1	09-SEP-12 15:40	14-SEP-12 17:19	3	5	days	EHTR
	2	10-SEP-12 10:20	14-SEP-12 17:19	3	4	days	EHTR
	3	10-SEP-12 11:30	14-SEP-12 17:19	3	4	days	EHTR
	6	10-SEP-12 16:30	14-SEP-12 17:19	3	4	days	EHTR
	7	10-SEP-12 17:45	14-SEP-12 17:19	3	4	days	EHTR
	8	10-SEP-12 16:30	14-SEP-12 17:19	3	4	days	EHTR
Nitrite Nitrogen by Ion Chromatography							
	1	09-SEP-12 15:40	14-SEP-12 17:19	3	5	days	EHTR
	2	10-SEP-12 10:20	14-SEP-12 17:19	3	4	days	EHTR
	3	10-SEP-12 11:30	14-SEP-12 17:19	3	4	days	EHTR
	6	10-SEP-12 16:30	14-SEP-12 17:19	3	4	days	EHTR
	7	10-SEP-12 17:45	14-SEP-12 17:19	3	4	days	EHTR
	8	10-SEP-12 16:30	14-SEP-12 17:19	3	4	days	EHTR
Volatile Organic Compounds							
VOCs in water by Headspace GCMS							
	1	09-SEP-12 15:40	26-SEP-12 19:41	14	17	days	EHT
	2	10-SEP-12 10:20	26-SEP-12 19:41	14	16	days	EHT
	3	10-SEP-12 11:30	26-SEP-12 19:41	14	16	days	EHT
	6	10-SEP-12 16:30	26-SEP-12 19:41	14	16	days	EHT
	7	10-SEP-12 17:45	26-SEP-12 19:41	14	16	days	EHT
	8	10-SEP-12 16:30	26-SEP-12 19:41	14	16	days	EHT
	10	11-SEP-12 10:45	26-SEP-12 19:41	14	15	days	EHT
	11	11-SEP-12 12:30	26-SEP-12 19:41	14	15	days	EHT
	12	11-SEP-12 14:15	26-SEP-12 19:41	14	15	days	EHT
	13	11-SEP-12 15:15	26-SEP-12 19:41	14	15	days	EHT
	17	11-SEP-12 19:15	26-SEP-12 19:41	14	15	days	EHT

Legend & Qualifier Definitions:

Quality Control Report

Workorder: L1209363

Report Date: 27-SEP-12

Page 37 of 37

EHTR-FM: Exceeded ALS recommended hold time prior to sample receipt. Field Measurement recommended.
EHTR: Exceeded ALS recommended hold time prior to sample receipt.
EHTL: Exceeded ALS recommended hold time prior to analysis. Sample was received less than 24 hours prior to expiry.
EHT: Exceeded ALS recommended hold time prior to analysis.
Rec. HT: ALS recommended hold time (see units).

Notes*:

Where actual sampling date is not provided to ALS, the date (& time) of receipt is used for calculation purposes.

Where actual sampling time is not provided to ALS, the earlier of 12 noon on the sampling date or the time (& date) of receipt is used for calculation purposes. Samples for L1209363 were received on 14-SEP-12 10:55.

ALS recommended hold times may vary by province. They are assigned to meet known provincial and/or federal government requirements. In the absence of regulatory hold times, ALS establishes recommendations based on guidelines published by the US EPA, APHA Standard Methods, or Environment Canada (where available). For more information, please contact ALS.

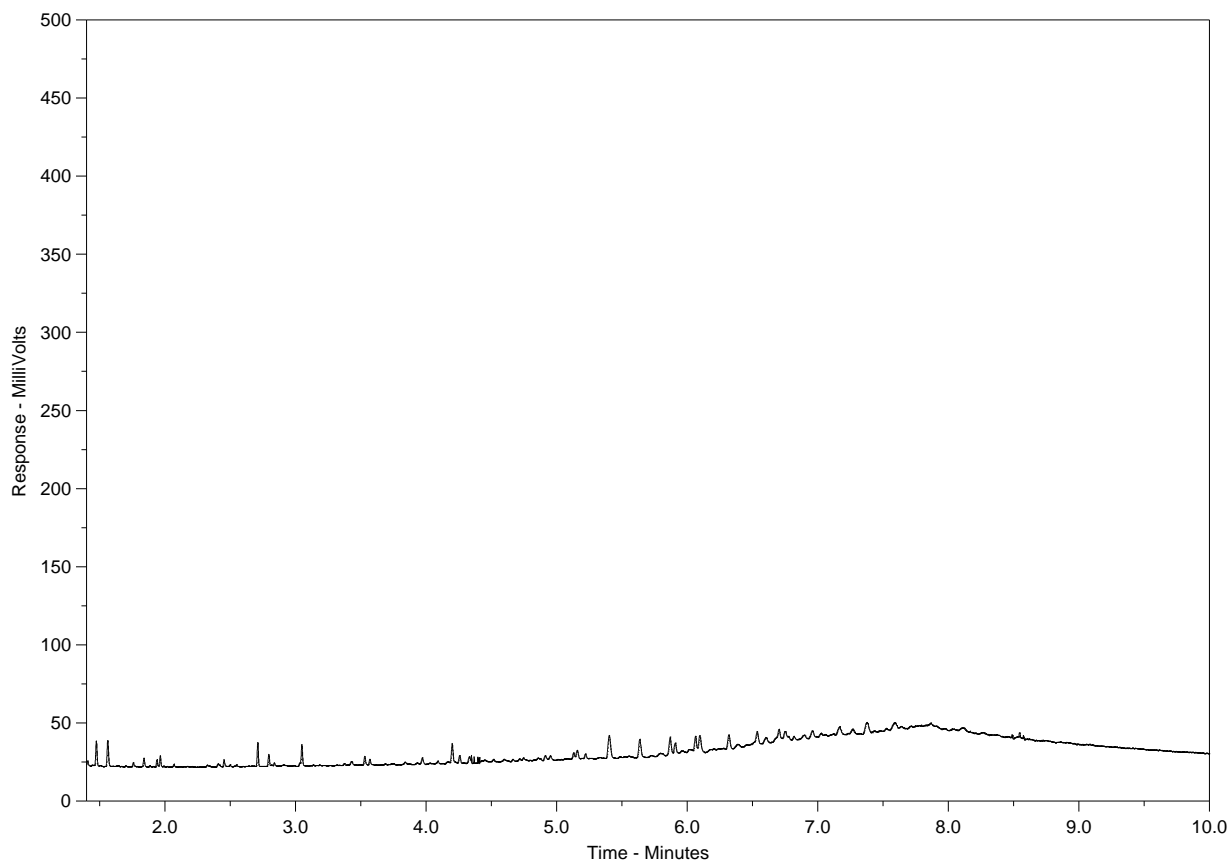
The ALS Quality Control Report is provided to ALS clients upon request. ALS includes comprehensive QC checks with every analysis to ensure our high standards of quality are met. Each QC result has a known or expected target value, which is compared against pre-determined data quality objectives to provide confidence in the accuracy of associated test results.

Please note that this report may contain QC results from anonymous Sample Duplicates and Matrix Spikes that do not originate from this Work Order.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-1
Client Sample ID: PC-MW12-01



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

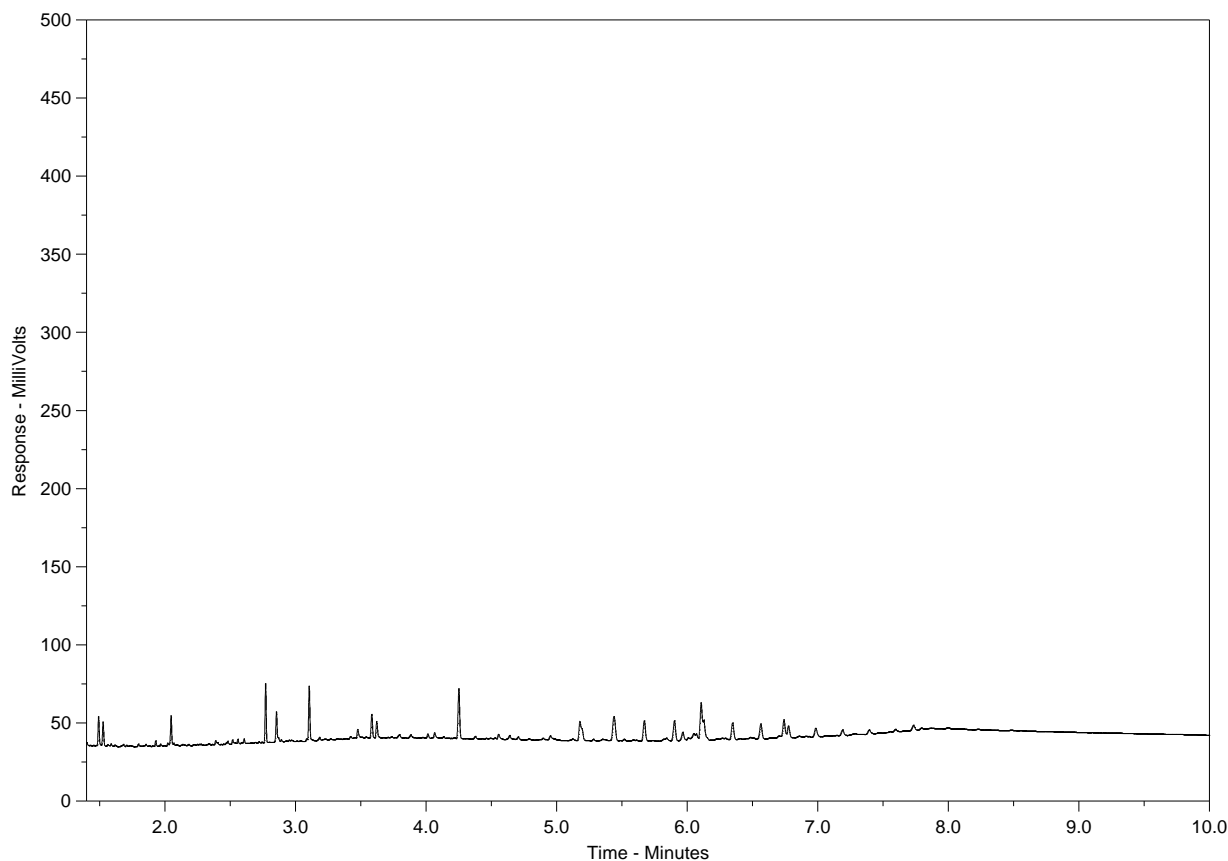
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-2
Client Sample ID: PC-MW12-02



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

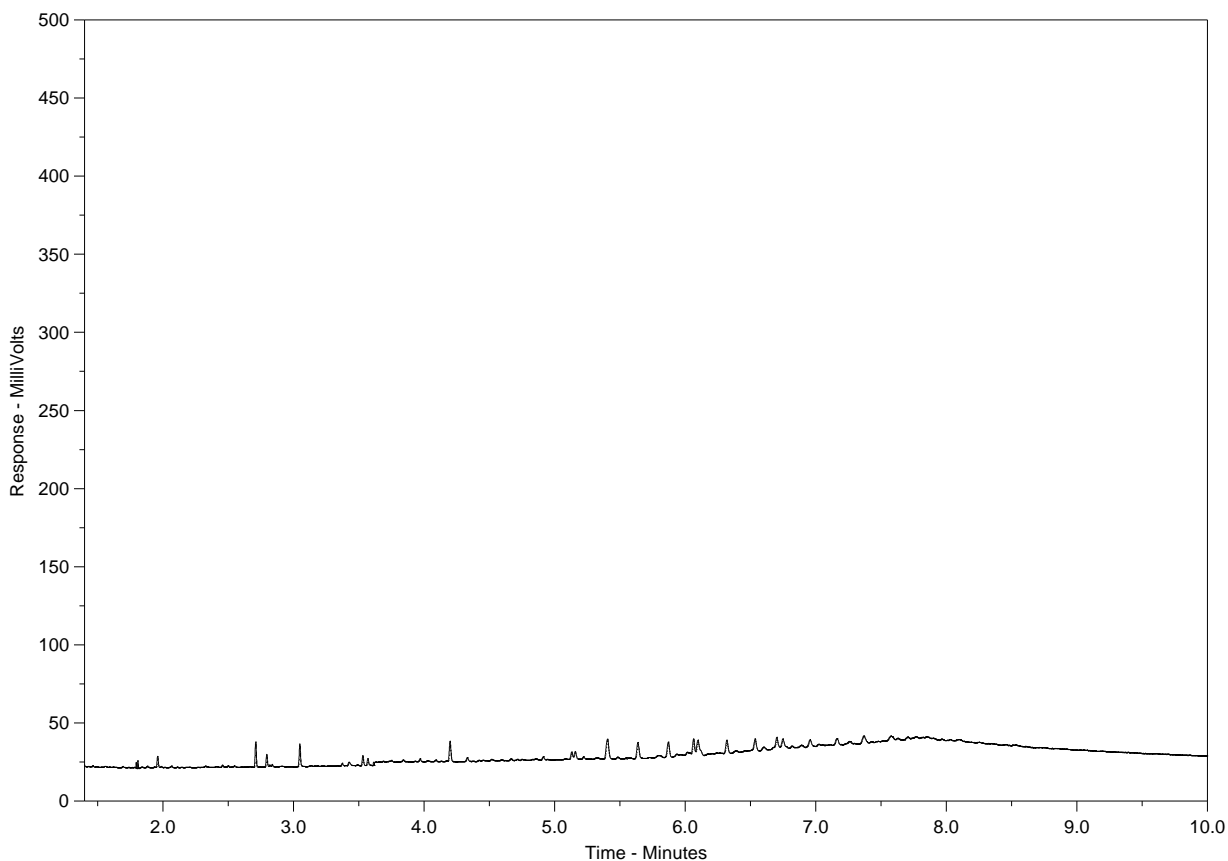
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-3
Client Sample ID: PC-MW12-03



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

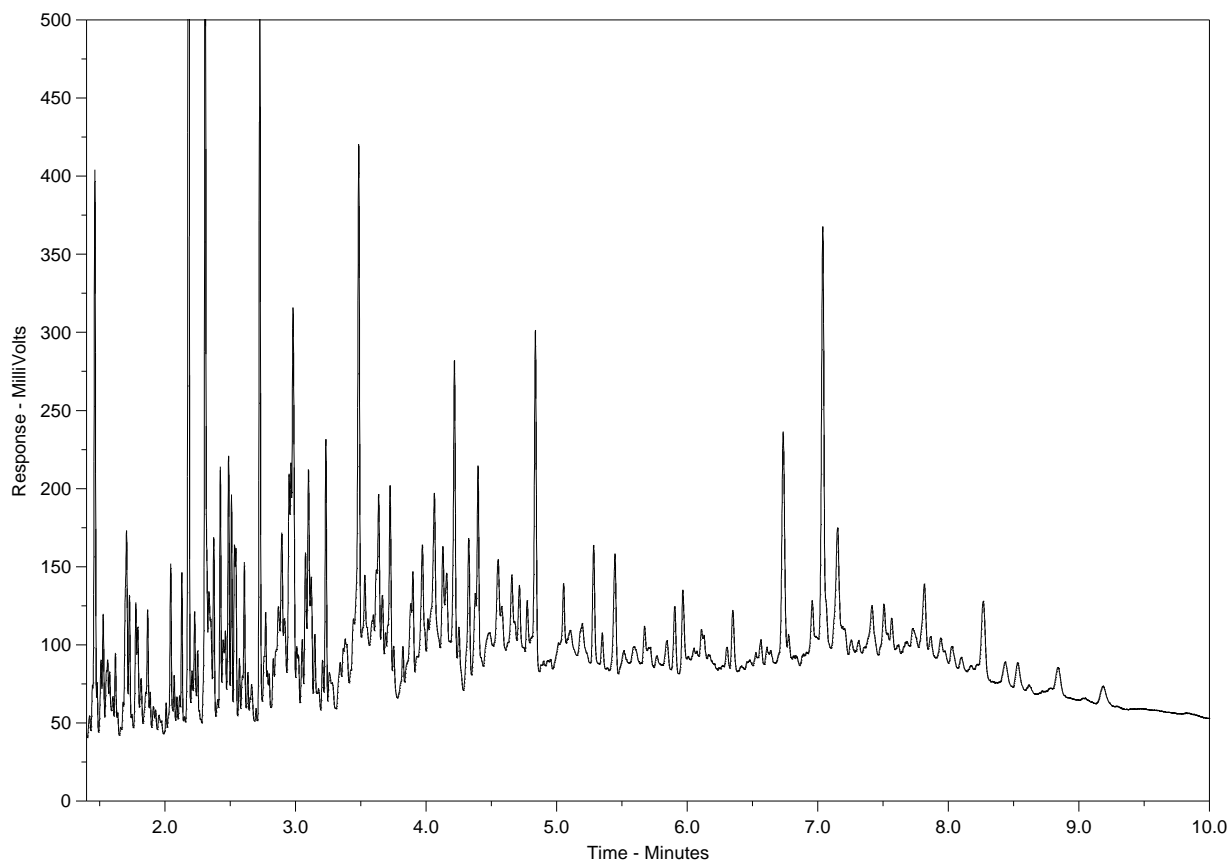
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-4
Client Sample ID: PC SURFACE



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

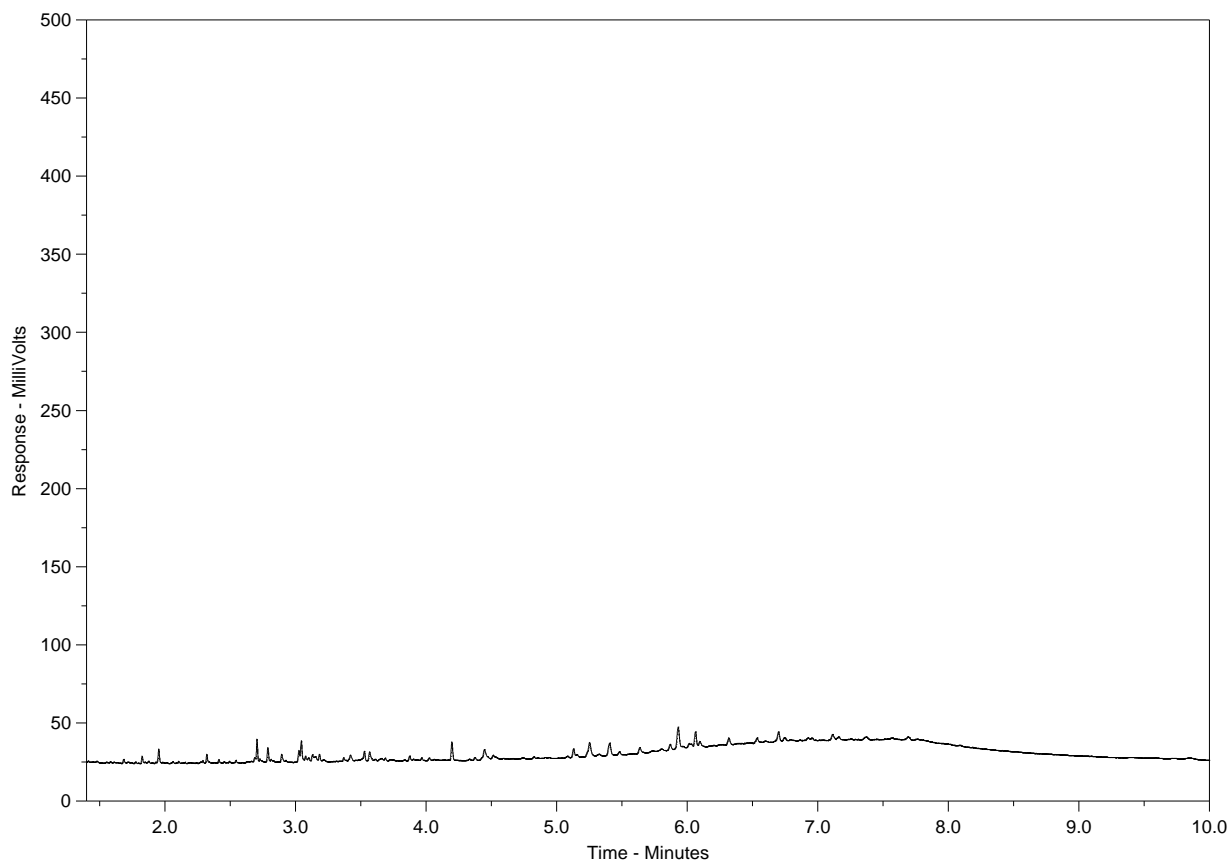
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-5
Client Sample ID: SX-MW12-01



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

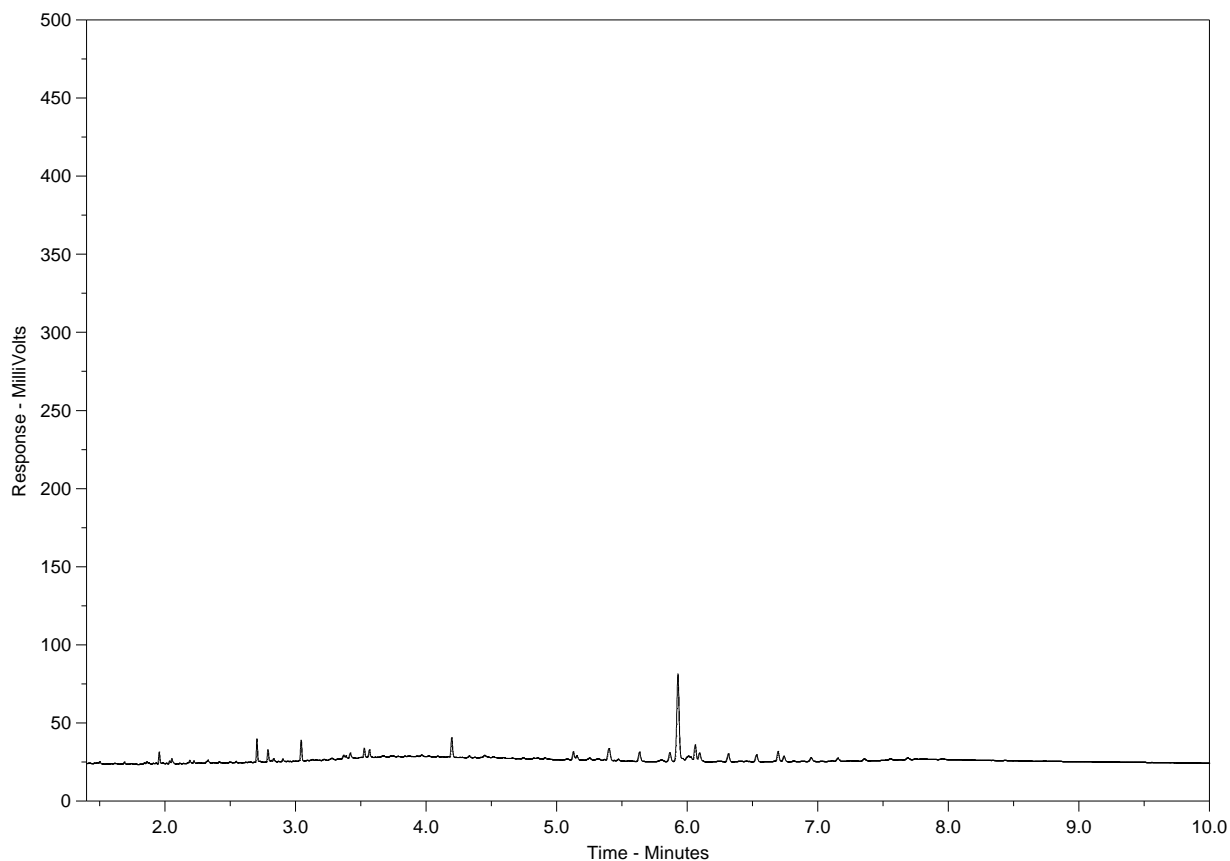
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-6
Client Sample ID: SX-MW12-02



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

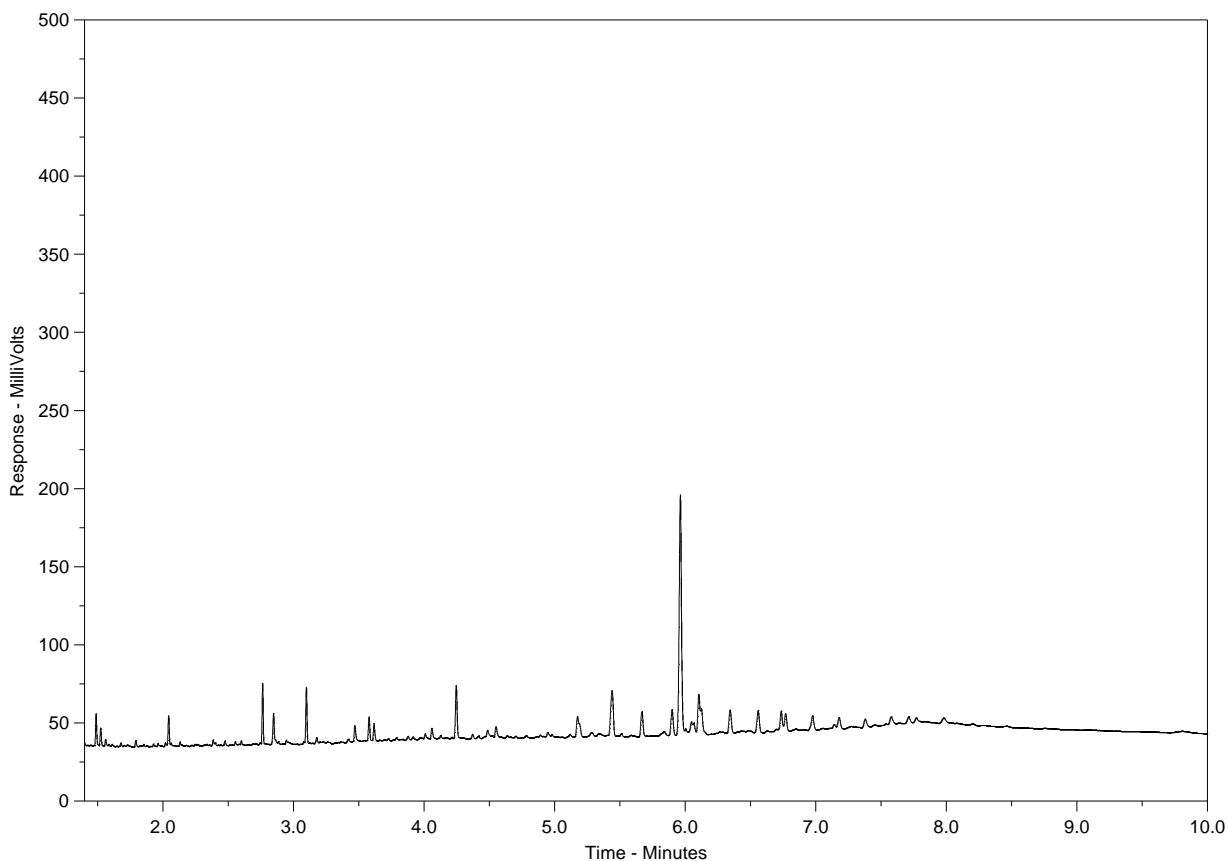
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-7
Client Sample ID: SX-MW12-03



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

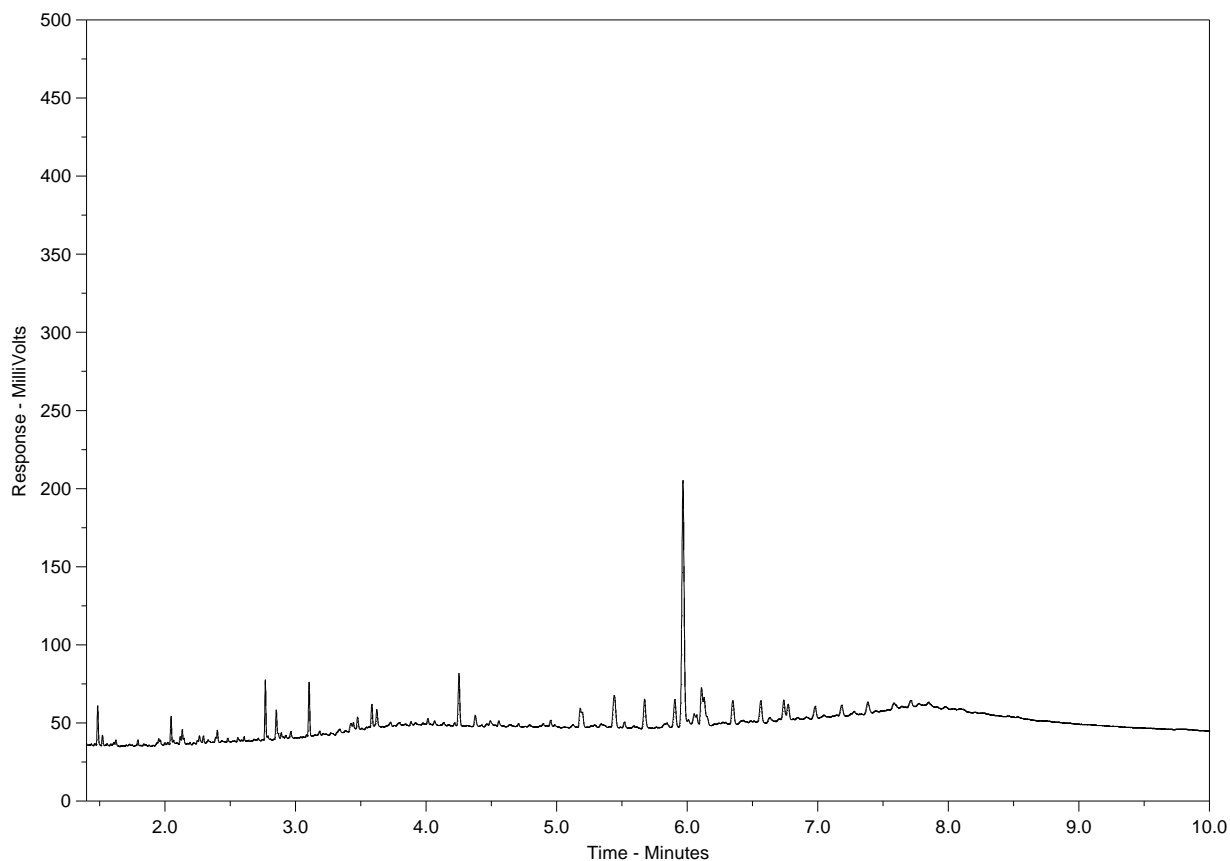
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-8
Client Sample ID: SX-MW12-04



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

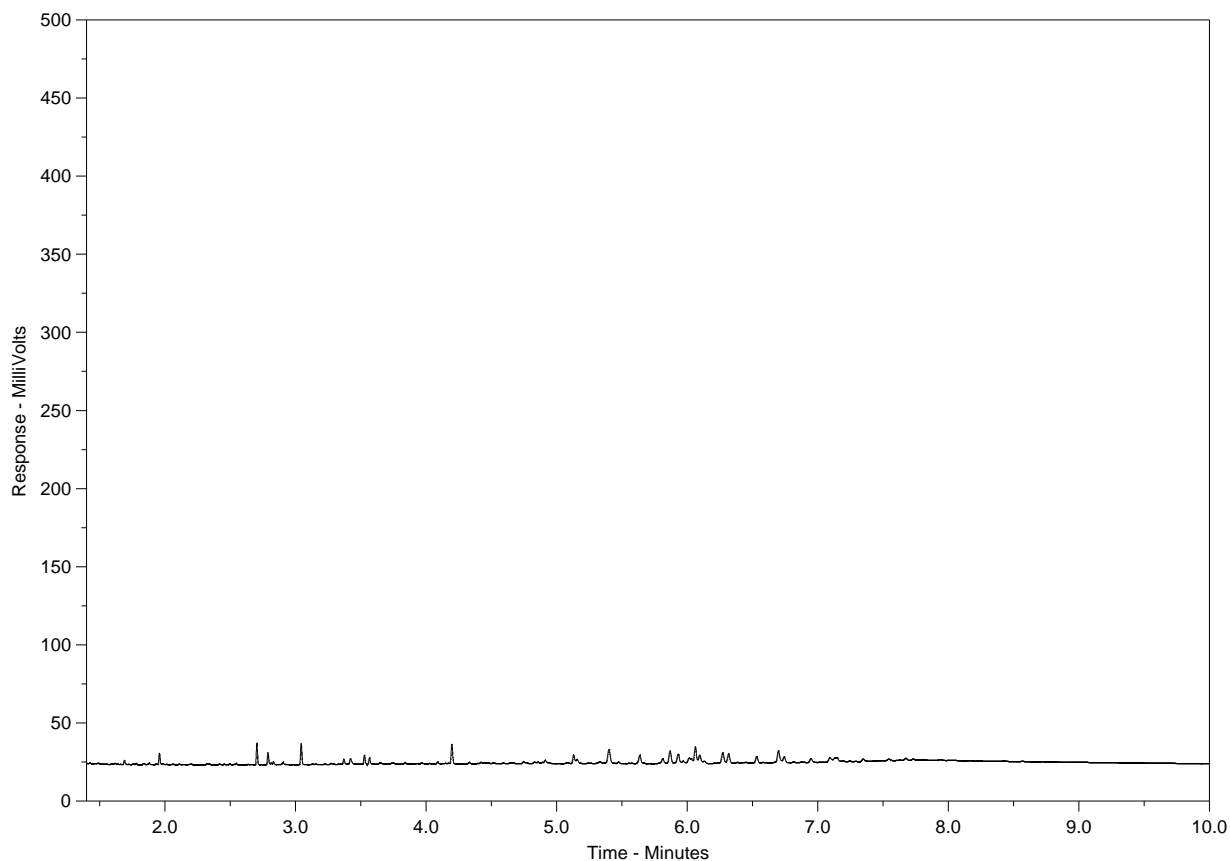
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-9
Client Sample ID: SX SURFACE



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

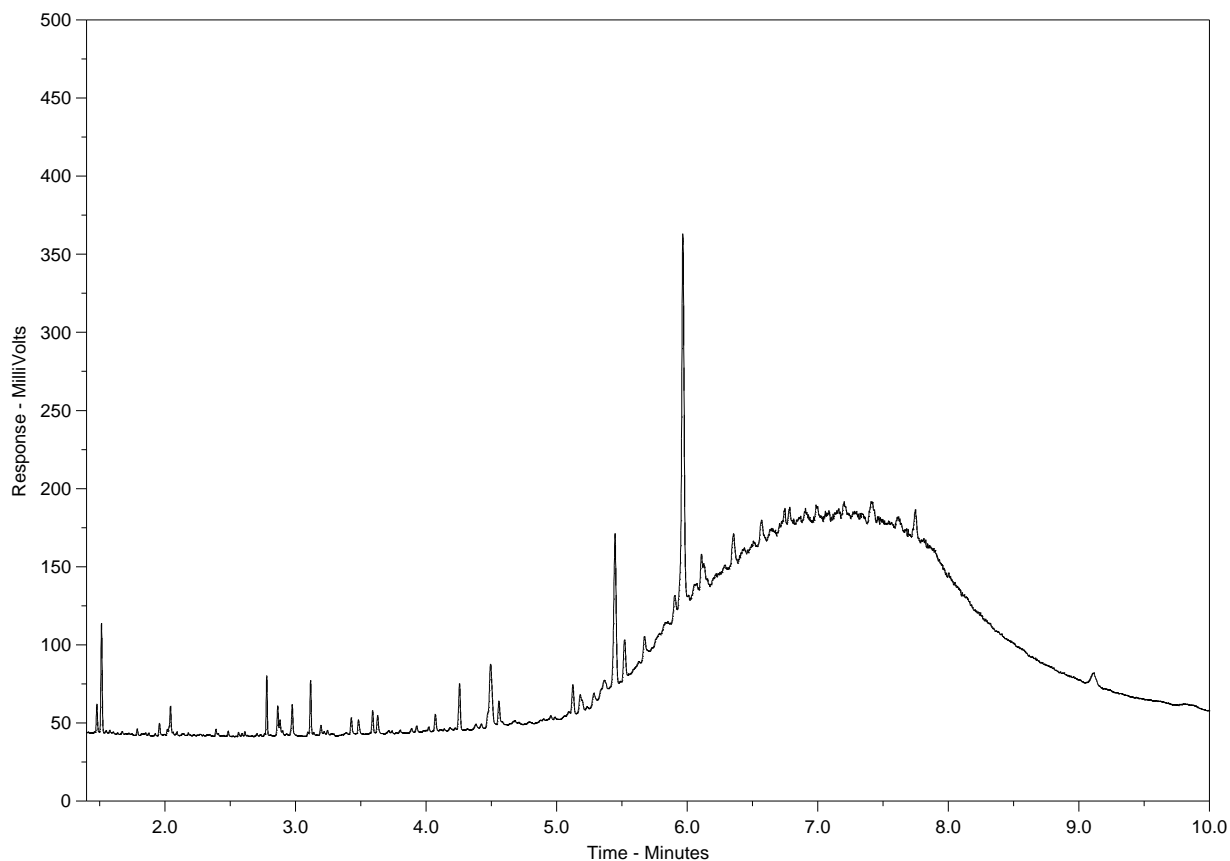
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-10
Client Sample ID: MA-MW12-01



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

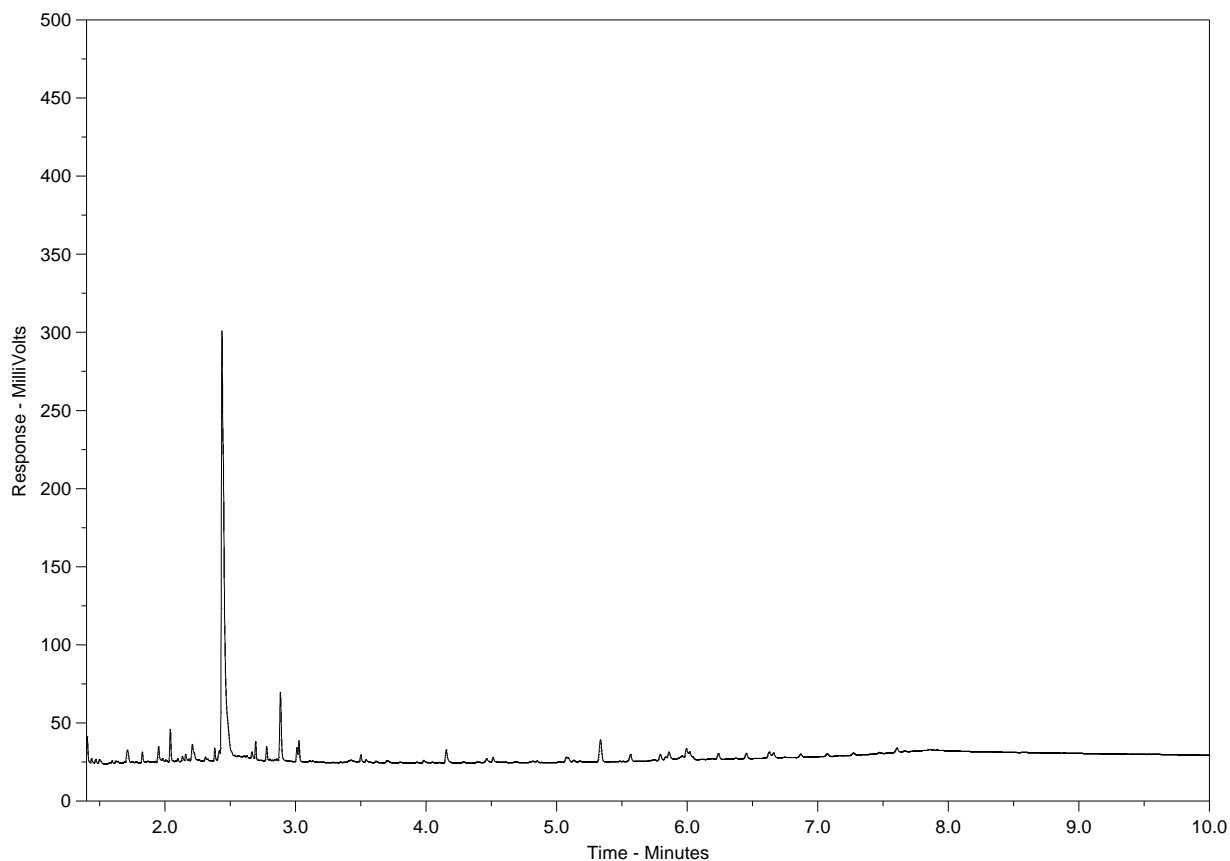
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-11
Client Sample ID: MA-MW12-02



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

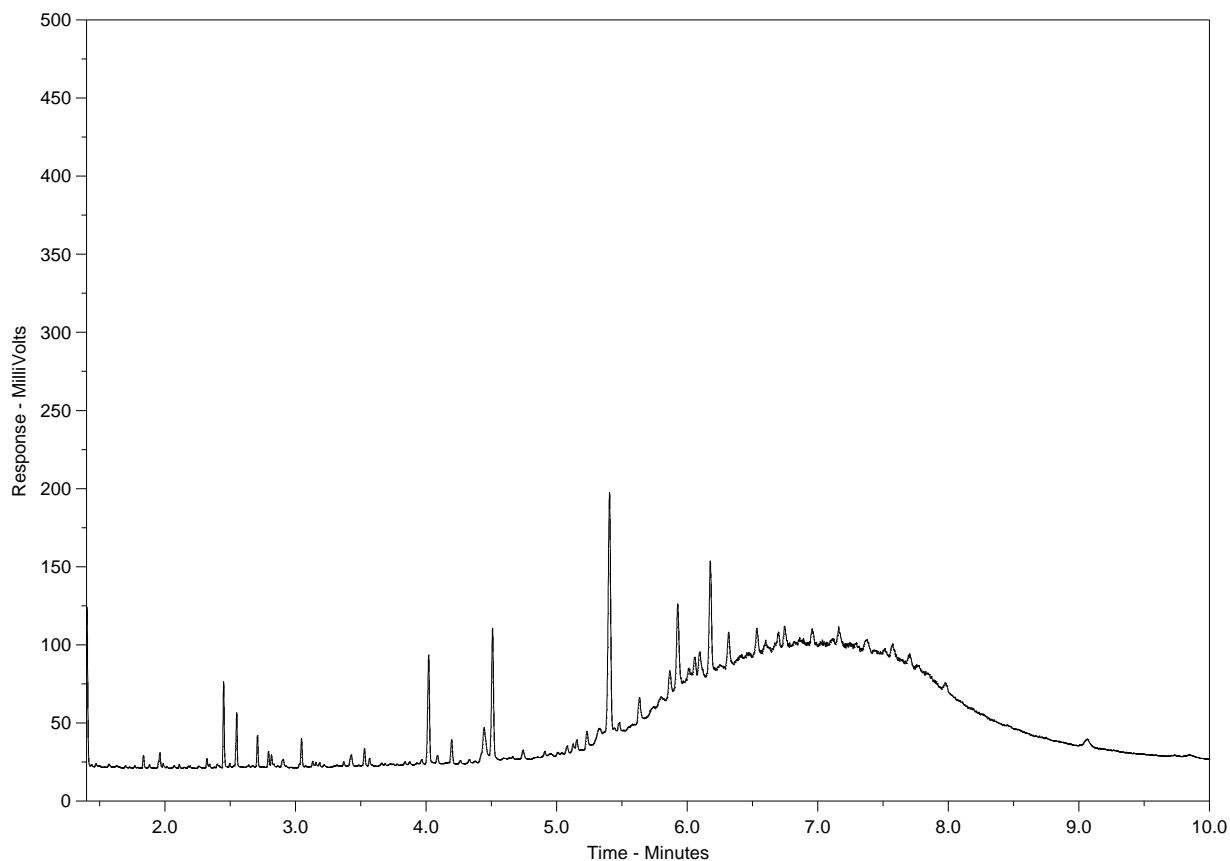
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-12
Client Sample ID: MA-MW12-03



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

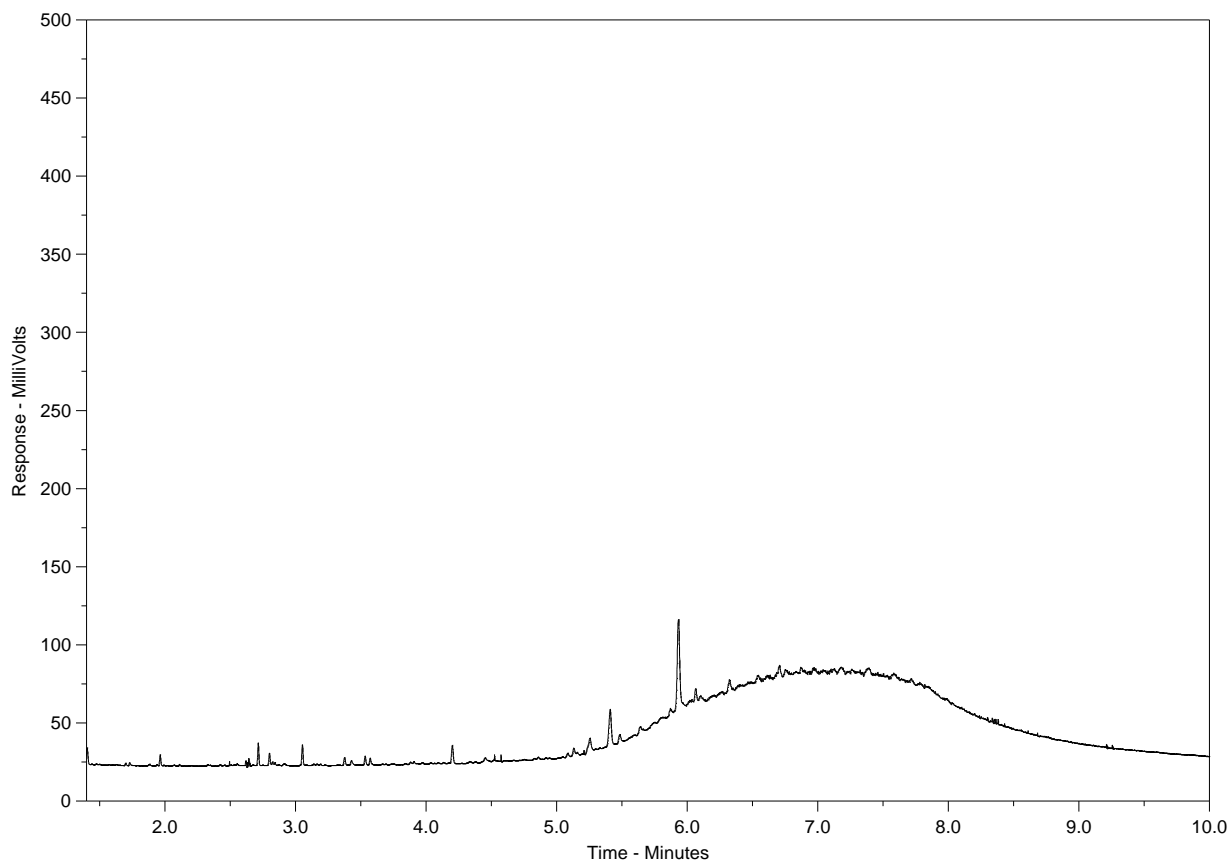
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-13
Client Sample ID: MA-MW12-04



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

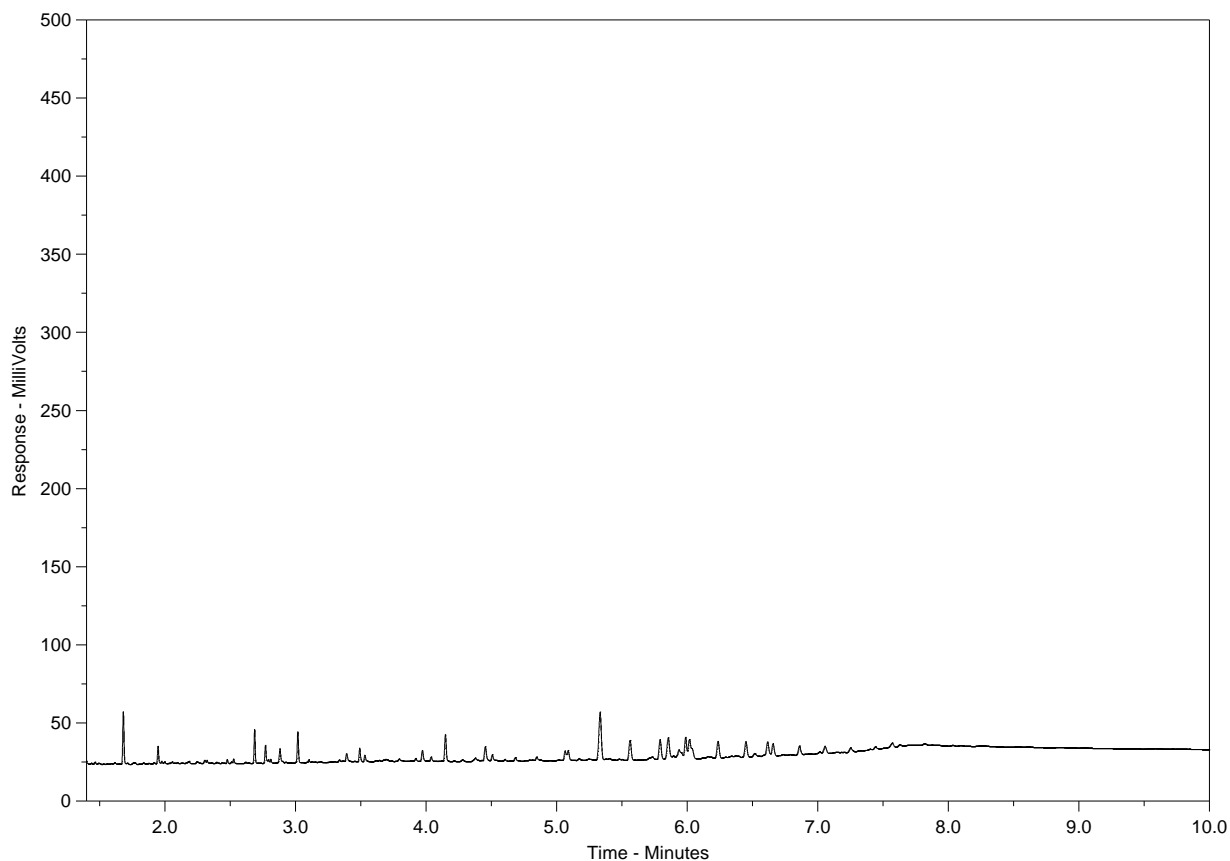
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-14
Client Sample ID: MA SURFACE



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

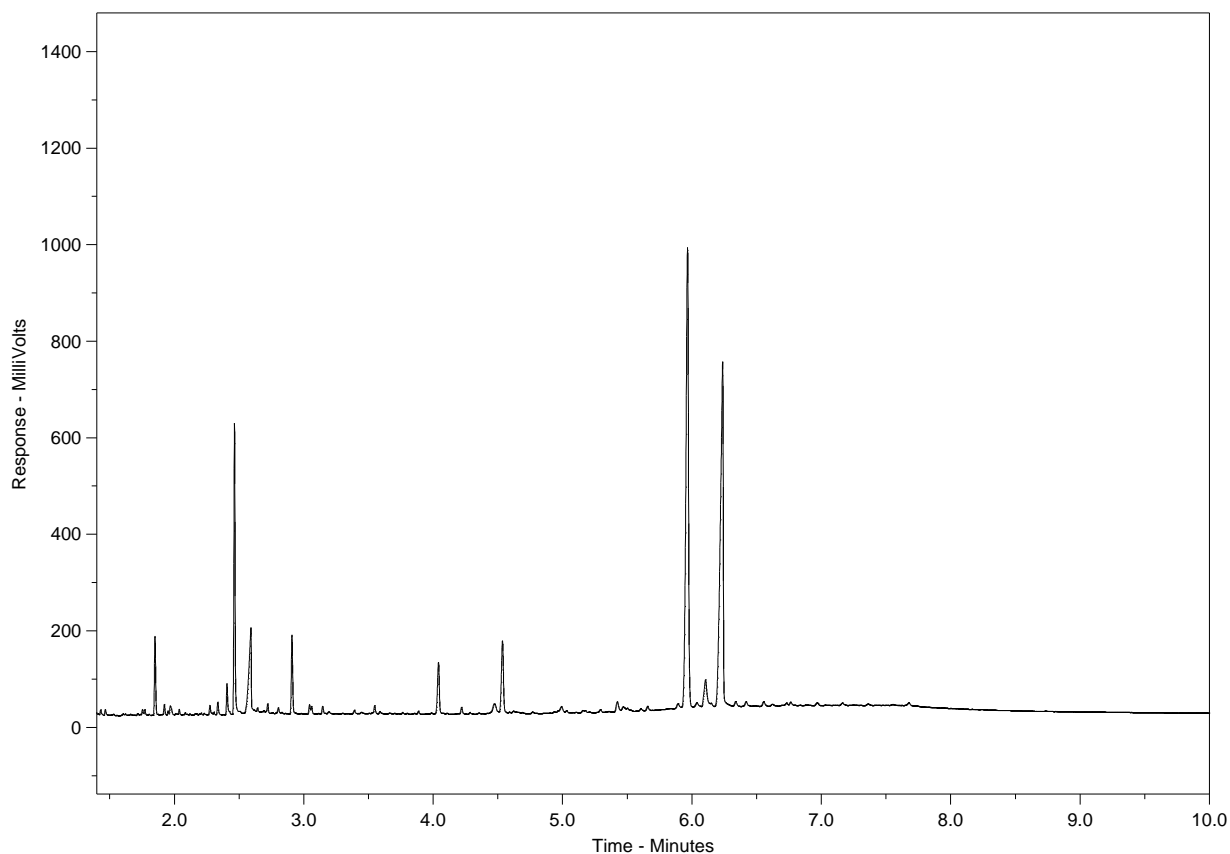
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-15
Client Sample ID: KE-MW12-01



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

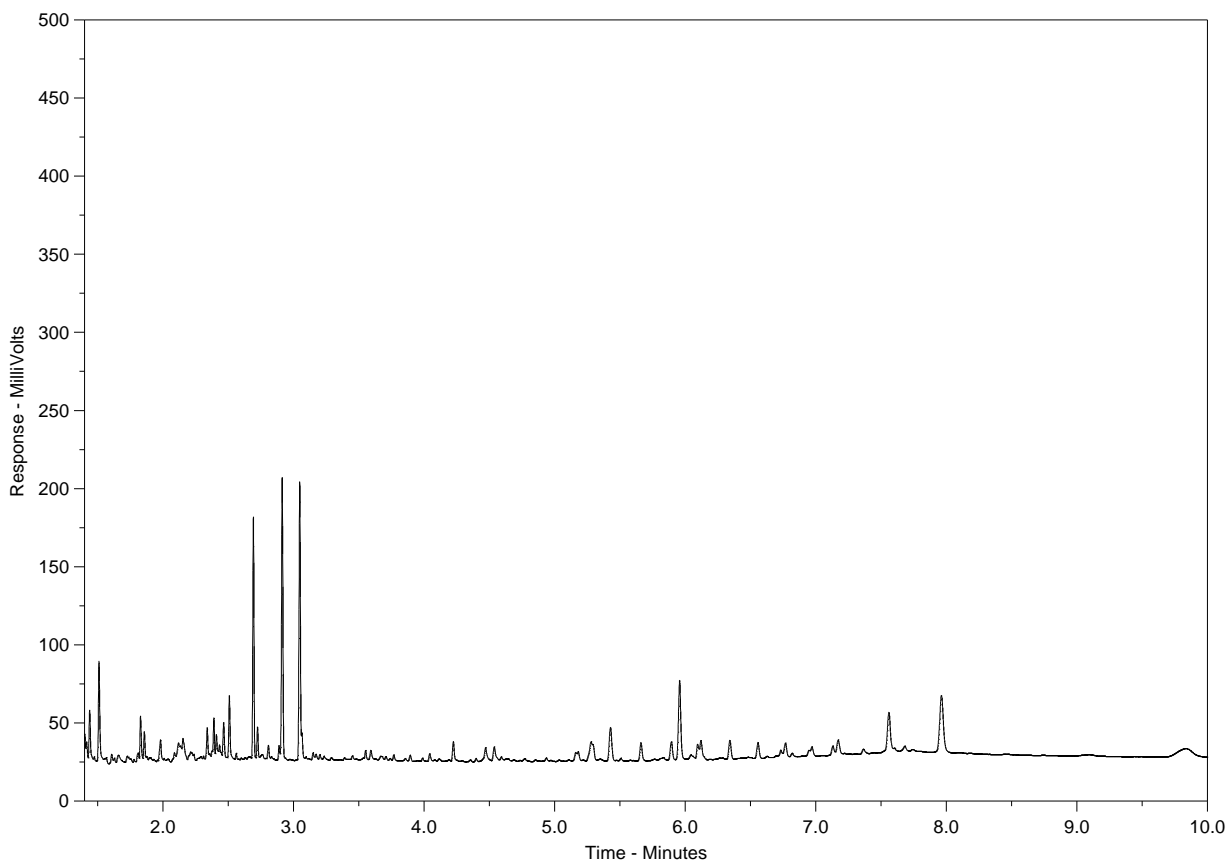
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-16
Client Sample ID: KE-MW12-03



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

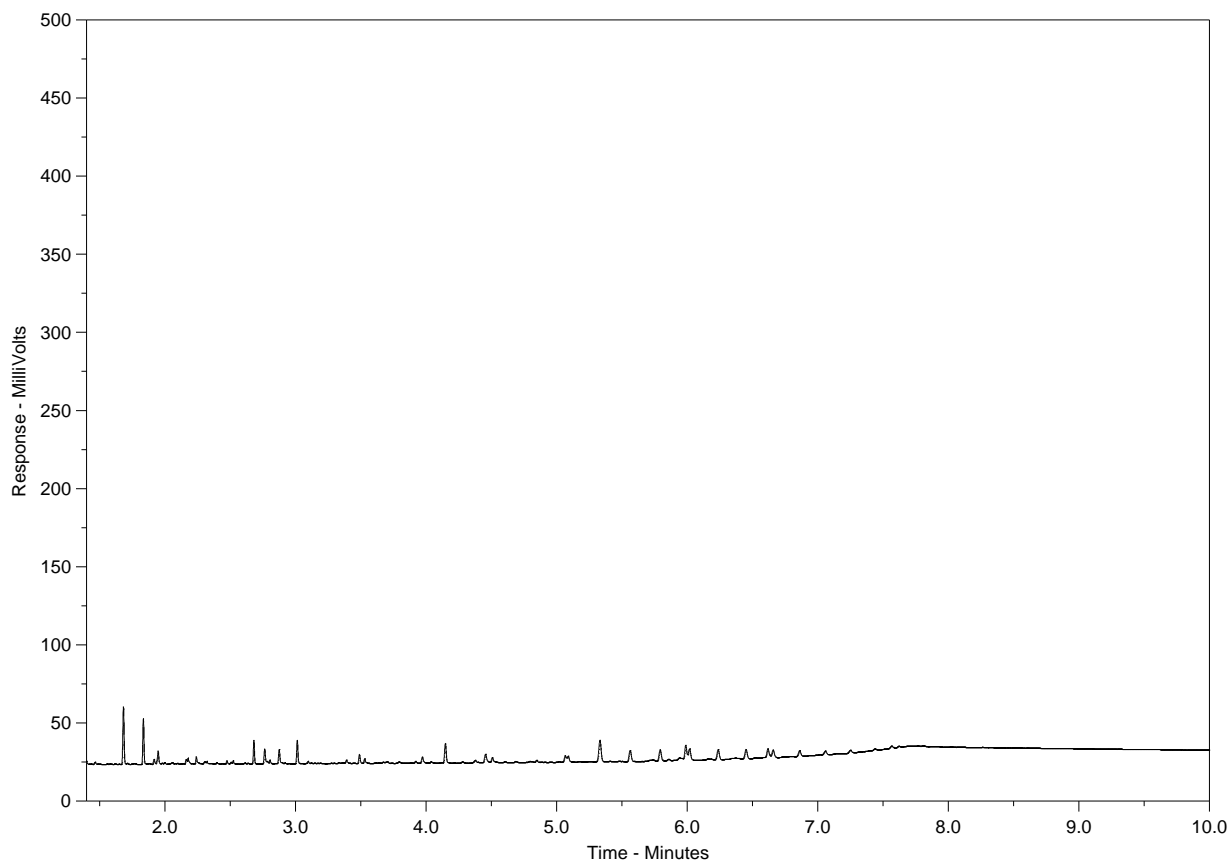
Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.

Hydrocarbon Distribution Report



ALS Sample ID: L1209363-17
Client Sample ID: KE SURFACE



nC10	nC19	nC32
174°C	330°C	467°C
346°F	626°F	873°F
<div><div>← Gasoline →</div><div>← Diesel / Jet Fuels →</div><div>← Motor Oils / Lube Oils / Grease →</div></div>		

The EPH Hydrocarbon Distribution Report (HDR) is intended to assist you in characterizing hydrocarbon products that may be present in your sample. For further interpretation, a current library of reference products is available on www.alsglobal.com or upon request.

The scale at the bottom of the chromatogram indicates the approximate retention times of common petroleum products, and three n-alkane hydrocarbon marker compounds. Retention times may vary between samples by as much as 0.5 minutes.

Peak heights in this report are a function of the sample concentration, the sample amount extracted, the sample dilution factor, and the response scale at the left.

A "-L-" in the sample ID denotes a low level sample. A "-S-" denotes a silica gel cleaned sample.



www.alsglobal.com

Page 2 of 2

GENF 18.01 Front

At Golder Associates we strive to be the most respected global company providing consulting, design, and construction services in earth, environment, and related areas of energy. Employee owned since our formation in 1960, our focus, unique culture and operating environment offer opportunities and the freedom to excel, which attracts the leading specialists in our fields. Golder professionals take the time to build an understanding of client needs and of the specific environments in which they operate. We continue to expand our technical capabilities and have experienced steady growth with employees who operate from offices located throughout Africa, Asia, Australasia, Europe, North America, and South America.

Africa	+ 27 11 254 4800
Asia	+ 86 21 6258 5522
Australasia	+ 61 3 8862 3500
Europe	+ 356 21 42 30 20
North America	+ 1 800 275 3281
South America	+ 55 21 3095 9500

solutions@golder.com
www.golder.com

Golder Associates Ltd.
500 - 4260 Still Creek Drive
Burnaby, British Columbia, V5C 6C6
Canada
T: +1 (604) 296 4200

