



Project No: [REDACTED] **Borehole Log: 32-MW14-1**

Project: *Watson Lake Drilling*

Client: *PWGSC*

Site Location: *APEC 32*

Logged by: [REDACTED]

Checked By: [REDACTED]

SUBSURFACE PROFILE			SAMPLE			VOC Concentration			Well Completion Details
Depth	Symbol	Description	Number	Type	Duplicate	1000	PPM 3000	5000	
0		Ground Surface							
1		SAND AND GRAVEL some silt, fine to medium, brown, loose, dry	1-1	G			15		
2									
3									
4									
5		*compact - dense from 1m							
6									
7			1-2	G			0		
8									
9									
10			1-3	G			0		
11									
12									
13									
14									
15			1-4				0		
16									
17									
18		*trace silt, compact, moist from 5.6m							
19									
20			1-5				0		
21									
22									
23									
24									
25									
26			1-6				0		
27									
28									
29									
30									
31			1-7				0		
32									
33									
34									
35									
36			1-8		Dup-1		0		
37									

Drilled By: Uniwide Drilling Ltd.

Drill Method: Solid Stem Auger/ODEX

Drill Date: 5/11/2014 to 9/11/2014

Hole Diameter: 6"

Well Diameter: 2"/NA in BH

Sheet: 1 of 3



Project No: [REDACTED] **Borehole Log: 32-MW14-1**

Project: *Watson Lake Drilling*

Client: *PWGSC*

Site Location: *APEC 32*

Logged by: [REDACTED]

Checked By: [REDACTED]

SUBSURFACE PROFILE			SAMPLE			VOC Concentration			Well Completion Details	
Depth	Symbol	Description	Number	Type	Duplicate	1000	PPM 3000	5000		
38	12	SAND some gravel, trace silt, fine to medium, brown, compact, moist								[Well Completion Diagrams]
39										
40										
41			1-9				0			
42	13	PEAT soft, black/brown, moist								
43								45		
44			1-10							
45	14	SAND AND GRAVEL trace silt, fine to medium, brown, compact, moist								
46										
47			1-11							
48	15									
49										
50										
51			1-12				0			
52	16									
53										
54										
55										
56	17									
57								0		
58										
59	18									
60										
61			1-14				0			
62	19									
63										
64										
65										
66	20									
67								0		
68										
69	21	SAND trace gravel, fine, light brown, loose, moist								
70										
71			1-16				0			
72	22									
73										
74			1-17				0			

Drilled By: Uniwide Drilling Ltd.

Drill Method: Solid Stem Auger/ODEX

Drill Date: 5/11/2014 to 9/11/2014

Hole Diameter: 6"

Well Diameter: 2"/NA in BH

Sheet: 2 of 3



Project No: [REDACTED] **Borehole Log: 32-MW14-1**

Project: *Watson Lake Drilling*


Client: *PWGSC*

Site Location: *APEC 32*

Logged by: [REDACTED]

Checked By: [REDACTED]

SUBSURFACE PROFILE			SAMPLE			VOC Concentration			Well Completion Details
Depth	Symbol	Description	Number	Type	Duplicate	0	1000	3000 PPM	
75	23		1-17			0			
76							0		
77	24		1-18			0			
78							0		
79	25	SILT soft, brown, moist							
80									
81	26	*grey from 28m							
82									
83	27	*wet at 29m	1-19			0			
84							0		
85	28	*stiff from 31m							
86									
87	29								
88									
89	30								
90									
91	31								
92									
93	32								
94									
95	33	End of Borehole	1-20			0			
96							0		
97									
98									
99									
100									
101									
102									
103									
104									
105									
106									
107									
108									
109									
110									
111									

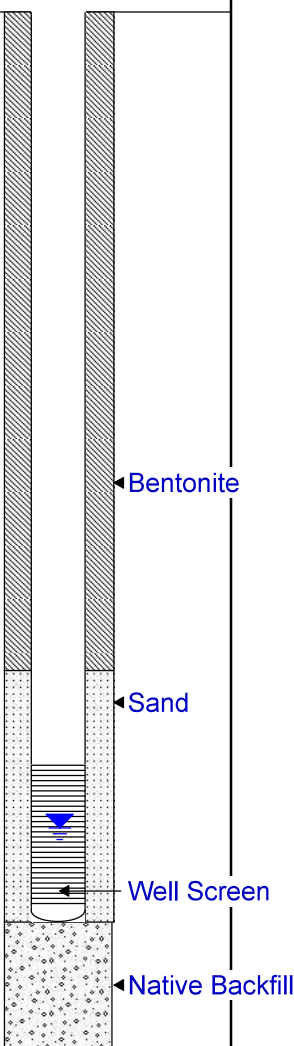

Drilled By: Uniwide Drilling Ltd.

Drill Method: Solid Stem Auger/ODEX

Drill Date: 5/11/2014 to 9/11/2014

Hole Diameter: 6"

Well Diameter: 2"/NA in BH

Sheet: 3 of 3