

LOG OF BORING MW59


(Page 1 of 1)

146 Industrial Road
Whitehorse, Yukon

Installation Date : August 29, 2007
 Contractor : [REDACTED]
 Drill Type : Hollow and Solid Stem Auger
 Logged By : [REDACTED]
 Well Installed : Yes

Elevation (Surface) :
 Elevation (TOC) :
 Elevation (Water) :
 DTW (from TOC) :
 Well Type : PVC (2" diameter)

Depth in Meters	USCS	GRAPHIC	DESCRIPTION	SAMPLES	SAMPLE NAME	Blow Count	REMARKS
							Well: MW59
			TOC: Top of Well Casing DTW: Depth to Water from TOC				
0			Brown medium to coarse GRAVELY SAND. Dry and loose.				
1	GP				MW59-1		
2	GP		Brown coarse SAND and GRAVEL. Moist and loose. Mild hydrocarbon odour. Grey medium SAND. Wet and loose. Hydrocarbon odour.		MW59-2		50 ppm
3					MW59-3/GR6		
4	SW				MW59-4		150 ppm
5					MW59-5/GR7 MW59-6		75 ppm 125 ppm
6	SM		SILT with some fine sand. Wet and compact.		MW59-7		150 ppm
6.6			End of hole @ 6.6 meters				
7							

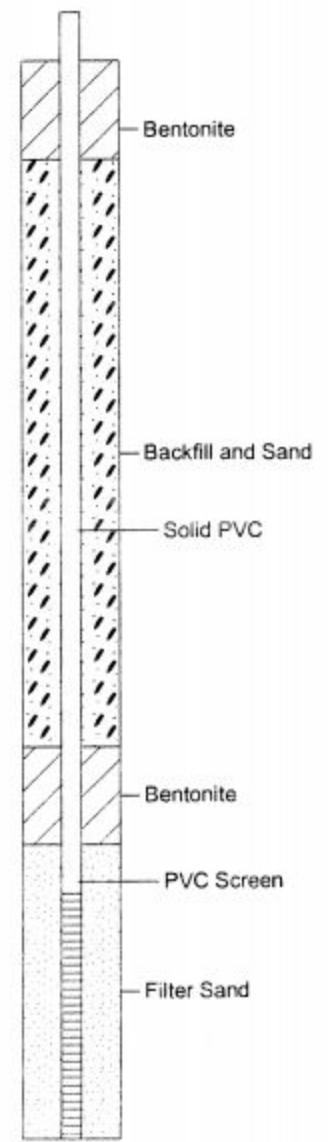

10-23-2007 T:\0600-999\0654 Russel Merisa\06 02\Borehole logs\MW59 bor